

## Kodiak SXA Series Generators - Your Commercial Power Choice for ...

- Quality**
  - Honda-powered 4-cycle air-cooled OHV engines for greater reliability and easy operation
  - Cost-saving maintenance-free brushless design
- Strength**
  - Steel protective cage supports unit for rigorous use
  - Rubber-mounted engine and components offer greater shock-protection from any impact
- Efficiency**
  - Optimal power output from low horsepower engines for increased fuel efficiency
- Portability**
  - Compact size brings portable power everywhere
- Safety**
  - Oil-Alert auto-shut-off prevents undue engine burnouts
  - Convenient non-fuse breakers provide low-maintenance safety
  - Now equipped with GFCI for safer operation in wet weather conditions (except on GESGA2300GC)



**GESXA1900HX**



**GESXA2800HX**



**GESGA2300GC**

### Features

|                              | GESXA1900HX | GESGA2300GC | GESXA2800HX |
|------------------------------|-------------|-------------|-------------|
| <b>Honda OHV Engine</b>      | •           | •           | •           |
| <b>Full Frame Protection</b> | •           | •           | •           |
| <b>Oil Alert</b>             | •           | •           | •           |
| <b>Voltage Regulator</b>     | •           |             | •           |
| <b>No-Fuse Breaker</b>       | •           |             | •           |

| Model                                | GESXA1900HX                                    | GESGA2300GC                                    | GESXA2800HX                                    |
|--------------------------------------|--|--|--|
| <b>Description</b>                   | 1950W Kodiak Recoil Start Commercial Generator | 2300W Kodiak Recoil Start Commercial Generator | 2800W Kodiak Recoil Start Commercial Generator |
| <b>Engine</b>                        | 4.0 hp Honda GX120 OHV                         | 5.0 hp Honda GC160 OHV                         | 5.5 hp Honda GX160 OHV                         |
| <b>Displacement</b>                  | 118 cc   | 160 cc   | 163 cc   |
| <b>Tank Capacity</b>                 | 0.66 USG (2.5 L)                               | 0.53 USG (1.4 L)                               | 0.95 USG (3.6 L)                               |
| <b>Alternator Half-load Run Time</b> | 3.3 hrs  | 2.3 hrs  | 3.6 hrs  |
| <b>Maximum Output</b>                | 1950W  | 2300W  | 2800W  |
| <b>Rated Output</b>                  | 1600W  | 2000W  | 2400W  |
| <b>Maximum Amps</b>                  | 16.25A   | 20A  | 23.3A  |
| <b>Rated Amps</b>                    | 13.3A  | 17A  | 20A  |
| <b>Net Weight</b>                    | 64 lbs   | 70 lbs   | 76 lbs   |
| <b>Dimensions ( L x W x H )</b>      | 21.8" x 15.6" x 15.3"                          | 22" x 16" x 16"                                | 21.5" x 16.3" x 15.9"                          |
| <b>Shipping Weight</b>               | 64 lbs   | 70 lbs   | 76 lbs   |

## Kodiak SXB Series Generators - When You Need Professional Power

- Capacity** ♦ Large fuel tanks increase run-times and improve job-site efficiency
- Strength** ♦ Full-frame steel cage for rugged everyday use  
♦ Increased shock-protection with rubber-mounted parts and engines
- Cost-effective** ♦ Longer half-load run-times maximize fuel economy  
♦ Optimal power output from low horsepower engines for increased fuel efficiency
- Jobsite Protection** ♦ Large mufflers ensure quiet operation for improved jobsite safety and operator comfort  
♦ Oil-Alert auto-shut-off prevents undue engine burnouts  
♦ Low-maintenance non-fuse breaker provide and safety



**GESXB2800HX**



\*shown with optional  
GEGENWHEELKIT  
available separately

**GESXB4000HX**

### Features

|                         | SXB2800 | SXB4000 | SXB5500 | SXB7000 | SGB12000HXS |
|-------------------------|---------|---------|---------|---------|-------------|
| Honda OHV Engine        | •       | •       | •       | •       | •           |
| Full Frame Protection   | •       | •       | •       | •       | •           |
| Oil Alert               | •       | •       | •       | •       | •           |
| Automatic Idle Control  |         | •       | •       | •       | •           |
| Voltmeter               | •       | •       | •       | •       | •           |
| Voltage Regulator       | •       | •       | •       | •       | •           |
| DC Output               | •       | •       | •       | •       | •           |
| No-Fuse Breaker         | •       | •       | •       | •       | •           |
| Optional Electric Start |         |         | •       | •       | •           |

| Recoil-Start Model                   | GESXB2800HX                         | GESXB4000HX                         |
|--------------------------------------|-------------------------------------|-------------------------------------|
| <b>Description</b>                   | 2800W Kodiak Professional Generator | 4500W Kodiak Professional Generator |
| <b>Engine</b>                        | 5.5 hp Honda GX160 OHV              | 8.0 hp Honda GX240 OHV              |
| <b>Displacement</b>                  | 163 cc                              | 242 cc                              |
| <b>Tank Capacity</b>                 | 2.90 USG (11.0 L)                   | 4.5 USG (17.0 L)                    |
| <b>Alternator Half-load Run Time</b> | 8.3 hrs                             | 8.5 hrs                             |
| <b>Maximum Output</b>                | 2800W                               | 4500W                               |
| <b>Rated Output</b>                  | 2400W                               | 3600W                               |
| <b>Maximum Amps</b>                  |                                     | 37.5/18.75A                         |
| <b>Rated Amps</b>                    | 20.0A                               | 30.0/15.0A                          |
| <b>Net Weight</b>                    | 142 lbs                             | 142 lbs                             |
| <b>Dimensions (L x W x H)</b>        | 21.5" x 16.7" x 16.5"               | 25.4" x 19.7" x 19.7"               |
| <b>Shipping Weight</b>               | 93 lbs                              | 148 lbs                             |



**GESXB5500HX**

**GESXB5500HXS**



**GESXB12000HXS**



\*shown with optional  
GEGENWHEELKIT  
available separately

**GESXB7000HX**

**GESXB7000HXS**

#### Carts for Kodiak SXB Generators



| Model       | GEGENWHEELKIT   | GEGWK-2  |
|-------------|---|--|
| Description | Full frame wheel kit<br>for 4000HX/S,<br>5500HX/S, and<br>7000HX/S generators | Universal generator lift kit<br>(frame not included) |

| Recoil-Start Model            | GESXB5500HX                         | GESXB7000HX                         | N/A   |
|-------------------------------|-------------------------------------|-------------------------------------|---|
| Electric-Start Model          | GESXB5500HXS                        | GESXB7000HXS                        | GESXB12000HXS                                     |
| Description                   | 5500W Kodiak Professional Generator | 6800W Kodiak Professional Generator | 12000W Kodiak Industrial Electric Start Generator |
| Engine                        | 11.0 hp Honda GX340 OHV             | 13.0 hp Honda GX390 OHV             | 20.0 hp Honda GX620 OHV                           |
| Displacement                  | 337 cc                              | 389 cc                              | 620 cc  |
| Tank Capacity                 | 4.5 USG (17.0 L)                    | 4.5 USG (17.0 L)                    | 10.6 USG (28.0 L)                                 |
| Alternator Half-load Run Time | 5.8 hrs                             | 5.2 hrs                             | 10.0 hrs  |
| Maximum Output                | 5500W                               | 6800W                               | 12000W  |
| Rated Output                  | 4500W                               | 5700W                               | 10000W  |
| Maximum Amps                  | 45.8/22.9A                          | 56.7/28.3A                          | 100.0/50.0A                                       |
| Rated Amps                    | 37.5/18.75A                         | 50.0/25.0A                          | 92.0/42.0A  |
| Net Weight                    | 168 lbs                             | 175 lbs                             | 348 lbs   |
| Dimensions (L x W x H)        | 26" x 20" x 20"                     | 27" x 20" x 20"                     | 32" x 22" x 29"                                   |
| Shipping Weight               | 163 lbs (HX)/<br>174 lbs (HXS)      | 176 lbs (HX)/<br>186 lbs (HXS)      | 348 lbs   |

## Kodiak Honda-powered Water Pumps - Versatile Heavy-duty Performance

### Quality

- ♦ Powered by Honda engines for reliability
- ♦ Protective metal roll-cage on 2" & 3" pumps gives added strength for everyday jobsite use

### Low-maintenance

- ♦ Cast-aluminium pump housing offers protection and portability
- ♦ Extra-strength carbon-ceramic mechanical seals for heavy-duty jobsite use

### Adaptability

- ♦ Available in 1", 2", or 3" sizes for jobs of all sizes
- ♦ Reduces the need to carry multiple pumps for the same job with ability to handle solids up to 7mm (1/4") in diameter



### **BKPWP1H**

| Model                    | BKPWP1H                               |
|--------------------------|---------------------------------------|
| Description              | 1" 1.0 hp Kodiak General Purpose Pump |
| Engine                   | 1.0 hp Honda 4-stroke GX25 OHC        |
| Port Size                | 1" x 1" (11 T.P.I.)                   |
| Maximum Capacity         | 33 USG/min (125 L/min)                |
| Suction Lift             | 26.2' ft (8 m)                        |
| Maximum Head             | 114' ft (35 m)                        |
| Net Weight               | 10 lbs (4.5 kgs)                      |
| Dimensions ( L x W x H ) | 12.4" x 8.86" x 13.4"                 |
| Shipping Weight          | 10 lbs (4.5 kgs)                      |

### **BKPWP2HXX**

### **BKPWP3HXX**

### **BKPWP4HXX**



| Model                    | BKPWP2HXX                             | BKPWP3HXX                             | BKPWP4HXX                             |
|--------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Description              | 2" 4.0 hp Kodiak General Purpose Pump | 3" 5.5 hp Kodiak General Purpose Pump | 4" 8.0 hp Kodiak General Purpose Pump |
| Engine                   | 4.0 hp Honda GX120 OHV                | 5.5 hp Honda GX160 OHV                | 8.0 hp Honda GX240 OHV                |
| Port Size                | 2" x 2" (50mm x 50mm)                 | 3" x 3" (80mm x 80mm)                 | 4" x 4" (100mm x 100mm)               |
| Maximum Capacity         | 158 USG/min (600 L/min)               | 290 USG/min (1100 L/min)              | 476 USG/min (1800 L/min)              |
| Suction Lift             | 28' ft (8.5 m)                        | 28' ft (8.5 m)                        | 26.2' ft (8 m)                        |
| Maximum Head             | 113' ft (34 m)                        | 105' ft (32 m)                        | 105' ft (32 m)                        |
| Net Weight               | 52 lbs (23.5 kgs)                     | 60 lbs (27.5 kgs)                     | 103 lbs (47 kgs)                      |
| Dimensions ( L x W x H ) | 18.8" x 14.75" x 14.6"                | 21.6" x 15.4" x 17.5"                 | 25.6" x 18.3" x 24.2"                 |
| Shipping Weight          | 52 lbs (23.5 kgs)                     | 60 lbs (27.5 kgs)                     | 103 lbs (47 kgs)                      |

# Semi-trash and trash pumps

## Kodiak Industrial Semi-Trash Pumps - Get out of the mud & into performance

- Performance** ♦ Super-tough design handles slurry & solids up to 3/4" in diameter
- Durability** ♦ Heavy-duty silicon carbide mechanical seal for long-lasting performance  
♦ Cast-iron volute and impeller for heavy-duty performance
- Reliability** ♦ Honda GX series power delivers everytime with hassle-free low maintenance



**BKPWP2SSTK**

**BKPWP3SSTK**

| Model                           | BKPWP2SSTK                       | BKPWP3SSTK                       |
|---------------------------------|----------------------------------|----------------------------------|
| <b>Description</b>              | 2" 4.0 hp Kodiak Semi-Trash Pump | 3" 5.5 hp Kodiak Semi-Trash Pump |
| <b>Engine</b>                   | 4.0 hp Honda GX120 OHV           | 5.5 hp Honda GX160 OHV           |
| <b>Port Size</b>                | 2" x 2" (50mm x 50mm)            | 3" x 3" (80mm x 80mm)            |
| <b>Maximum Capacity</b>         | 185 USG/min (700 L/min)          | 264 USG/min (1000 L/min)         |
| <b>Suction Lift</b>             | 28' ft (8.5 m)                   | 28' ft (8.5 m)                   |
| <b>Maximum Head</b>             | 76' ft (23 m)                    | 76' ft (23 m)                    |
| <b>Net Weight</b>               | 46 lbs (21 kgs)                  | 59 lbs (27 kgs)                  |
| <b>Dimensions ( L x W x H )</b> | 19" x 16" x 16.5"                | 21" x 17" x 17"                  |
| <b>Shipping Weight</b>          | 46 lbs (21 kgs)                  | 59 lbs (27 kgs)                  |



## Kodiak High Output Trash Pumps - When you want results

- Capacity** ♦ Cast-iron impeller and volute delivers strength and performance for clearing solids up to 1" in diameter
- Low Maintenance** ♦ Removable front-cover for easy cleaning and on-site maintenance
- Jobsite Protection** ♦ Oil-Alert on Honda GX engines ensure safe and dependable operation for jobsite installations

**BKPWP2SWT**

**BKPWP3SWT**

**BKPWP4SWT**

| Model                           | BKPWP2SWT                   | BKPWP3SWT                   | BKPWP4SWT                |
|---------------------------------|-----------------------------|-----------------------------|--------------------------|
| <b>Description</b>              | 2" 5.5 hp Kodiak Trash Pump | 3" 8.0 hp Kodiak Trash Pump |                          |
| <b>Engine</b>                   | 5.5 hp Honda GX160 OHV      | 8.0 hp Honda GX240 OHV      | 11.0 hp Honda GX340 OHV  |
| <b>Port Size</b>                | 2" x 2" (50mm x 50mm)       | 3" x 3" (80mm x 80mm)       | 4" x 4" (100mm x 100mm)  |
| <b>Maximum Capacity</b>         | 158 USG/min (600 L/min)     | 343 USG/min (1300 L/min)    | 530 USG/min (2000 L/min) |
| <b>Suction Lift</b>             | 26' ft (8.0 m)              | 26' ft (8.0 m)              | 26' ft (8.0 m)           |
| <b>Maximum Head</b>             | 80' ft (24 m)               | 93' ft (28 m)               | 93' ft (28 m)            |
| <b>Net Weight</b>               | 74 lbs (33.7 kgs)           | 132 lbs (60 kgs)            | 147 lbs (67 kgs)         |
| <b>Dimensions ( L x W x H )</b> | 25" x 17" x 19.5"           | 29.5" x 20.8" x 25.7"       | 29.9" x 20" x 26.5"      |
| <b>Shipping Weight</b>          | 74 lbs (33.7 kgs)           | 132 lbs (60 kgs)            | 147 lbs (67 kgs)         |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

Update: 08A06UNICATE

A5

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## Kodiak High Pressure Water Pump - For demanding jobs

- Efficiency** ♦ Special high-pressure design lets you blast through jobs faster and more efficiently
- Contractor Tough** ♦ Metal roll-cage adds strength and extra protection for extended durability
- Performance** ♦ High quality parts and assembly allows for uninterrupted jobsite performance

| Model                    | BKPWP2SCH5050K                      |
|--------------------------|-------------------------------------|
| Description              | 2" 5.5 hp Kodiak High Pressure Pump |
| Engine                   | 5.5 hp Honda GX160 OHV              |
| Port Size                | 2" x 2" (50mm x 50mm)               |
| Maximum Capacity         | 106 USG.min (400 L/min)             |
| Suction Lift             | 26' ft (8 m)                        |
| Maximum Head             | 165' ft (50 m)                      |
| Net Weight               | 59 lbs (26 kgs)                     |
| Dimensions ( L x W x H ) | 22" x 15.5" x 17.5"                 |
| Shipping Weight          | 59 lbs (26 kgs)                     |



**BKPWP2SCH5050K**




**PSP200SS**



## Endura 2" Submersible Pump - Get the best in Performance & Value

- Contractor-tough** ♦ Unique design with double silicon carbide mechanical seals offers added protection for extended life
- ♦ Cast-iron volute and impeller combine to add weight and performance to submersible design
- ♦ Specially-treated components extend rust protection for longer service times and low-maintenance needs
- Cost-effective** ♦ Low power demands for cost-effective performance in long-term installations
- Jobsite Protection** ♦ CSA-certified for guaranteed safe performance under tough conditions
- ♦ Non-marring rubber base protects jobsite from marks or cuts common to metal bases.
- ♦ Added shock-absorption from rubber bases extends life of pump and increases return on investment per unit

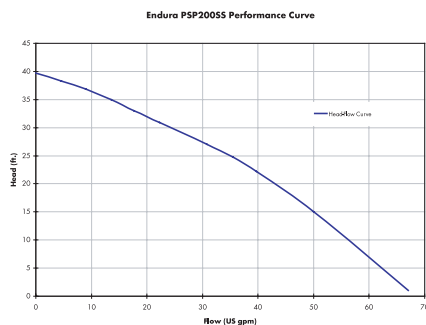

| Model                    | PSP200SS                                |
|--------------------------|---|
| Description              | 2" 0.5 hp Endura Submersible Pump       |
| Motor                    | 0.5 hp, 115V, 6A Induction Electric     |
| Port Size                | 2" NPT                                  |
| Maximum Capacity         | 67 US gpm (253 L/min)                   |
| Maximum Head             | 37.39' (11.40m)                         |
| Net Weight               | 29lbs. (13.2kg)* (excluding power cord) |
| Dimensions ( L x W x H ) | 24" x 19" x 19"                         |
| Shipping Weight          | 33lbs. (14.85kg)                        |

## Kodiak Pump Accessories - Quality Parts for Professional Machines

### Type A Male Coupler



| Size    | Product No. |
|---------|-------------|
| 2" inch | IPCAM2A     |
| 3" inch | IPCAM3A     |

### Type D Female Coupler



| Size    | Product No. |
|---------|-------------|
| 2" inch | IPCAM2D     |
| 3" inch | IPCAM3D     |

### Trash Strainer (standard threaded model with square hole)



| Size    | Product No. |
|---------|-------------|
| 2" inch | IPSHS-25    |
| 3" inch | IPSHS-35    |

### Type B Female Coupler



| Size    | Product No. |
|---------|-------------|
| 2" inch | IPCAM2B     |
| 3" inch | IPCAM3B     |

### Type E Male Coupler



| Size    | Product No. |
|---------|-------------|
| 2" inch | IPCAM2E     |
| 3" inch | IPCAM3E     |

### Centrifugal Strainer (standard threaded model with round hole)



| Size    | Product No. |
|---------|-------------|
| 2" inch | IPRHS-25    |
| 3" inch | IPRHS-35    |

### Type C Female Coupler



| Size    | Product No. |
|---------|-------------|
| 2" inch | IPCAM2C     |
| 3" inch | IPCAM3C     |

### Type F Male Coupler



| Size    | Product No. |
|---------|-------------|
| 2" inch | IPCAM2F     |
| 3" inch | IPCAM3F     |

### Hose Kit for BKPWP1H



#### Model BKPWP1MFKIT

**Includes** 1" PVC discharge hose, 1" suction hose, 1" male & female couplings, 1" poly fog nozzle, and 1.5" x 1" black iron bushing

### PVC Discharge Hose (includes coupling)



| Length  | Diameter             | Product No. |
|---------|----------------------|-------------|
| 50' ft. | 1.5" inch            | IPD50-11/2  |
| 50' ft. | 2" inch              | IPD50-2     |
| 50' ft. | 2" inch High Density | IPD50-2HD   |
| 50' ft. | 3" inch              | IPD50-3     |
| 50' ft. | 3" inch High Density | IPD50-3HD   |

### PVC Suction Hose (includes coupling)



| Length  | Diameter  | Product No. |
|---------|-----------|-------------|
| 20' ft. | 1.5" inch | IPS20-11/2  |
| 20' ft. | 2" inch   | IPS20-2     |
| 20' ft. | 3" inch   | IPS20-3     |



**PWKODIAK4000R**

## Kodiak Consumer Electric Pressure Washers - Simplicity & Value

### Convenience

- ◆ Detergent bottle attachment and quick-connect garden hose coupling for easy set-up anywhere

### Reliable

- ◆ Quality General Pump design & induction electric motor for easy starts & hassle-free performance

### Value

- ◆ High-performance Rotoclean nozzle delivers solid professional results



## Kodiak Light-Medium Duty Commercial Electric Pressure Washers - For rugged performance

### Quality Components

- ◆ Ceramic plungers for extended unit life and low-maintenance
- ◆ Wire-braided high-pressure hose offers added flexibility and durability

### Compact

- ◆ Built-in soap-feed system eliminates need to carry separate components for easy set-up

### Adaptabe

- ◆ Choose either the PWFORMULA100 with built-in unloader or the PWTURBO21 with separate unloader valve to suit your budget and needs



**PWFORMULA100**



**PWTURBO21**

| Model                            | PWKODIAK4000R                                     | PWFORMULA100  | PWTURBO21   |
|----------------------------------|---|---|---|
| Description                      | Kodiak Consumer 1300 PSI Electric Pressure Washer | Kodiak Commercial 1000 PSI Electric Pressure Washer | Kodiak Commercial 1000 PSI Electric Pressure Washer |
| Motor                            | 1.5 hp, 120V, 15A Single-phase Electric           | 1.5 hp, 120V, 15A Single-phase Electric             | 1.5 hp, 120V, 15A Single-phase Electric             |
| Flow (US gpm)                    | 1.85  | 2.1   | 2.1   |
| Pressure (PSI)                   | 1300  | 1000  | 1000  |
| Cleaning Units (Flow x Pressure) | 2405  | 2100  | 2100  |
| Hose Length                      | 26' ft  | 26' ft  | 26' ft  |
| Dimensions ( L x W x H )         | 18.5" x 9.75" x 13"                               | 17.5" x 12" x 11"                                   | 16.75" x 12" x 12.5"                                |
| Shipping Weight                  | 38 lbs  | 43 lbs  | 56 lbs  |



## Kodiak Electric Professional Pressure Washers - When the tough get cleaning

### Professional Design

- ♦ Tough professional electric motors provide high horsepower cleaning
- ♦ Quick-connect nozzles allow you to easily switch to the right nozzle quickly

### Industrial Parts

- ♦ All brass valves from Interpump delivers long-lasting performance and hassle-free operation

### Versatile

- ♦ Innovative design offers optimal portability from hand-held roll-cage design on PW2100EPH to convertible carts on PW2100EPC and up
- ♦ Reversible cart converts from low-slung position to traditional upright style to suit operator comfort

### **PWKC2100EPH**



Hand-held model with protective roll-cage lets you clean everywhere



Clean in comfort with the innovative convertible cart design!



### **PWKC2100EPC**

### **PWKC3150EPC**

### **PWKC3200EPC**

| Model                            | PWKC2100EPH  | PWKC2100EPC   | PWKC3150EPC   | PWKC3200EPC   |
|----------------------------------|--|---|---|---|
| Description                      | Kodiak Professional 1000 PSI Handheld Electric Pressure Washer | Kodiak Professional 1100 PSI Reversible Cart Electric Pressure Washer | Kodiak Professional 1650 PSI Reversible Cart Electric Pressure Washer | Kodiak Professional 2200 PSI Reversible Cart Electric Pressure Washer |
| Engine                           | 1.5 hp, 120V, 15A Single-phase Electric                        | 1.5 hp, 120V, 15A Single-phase Electric                               | 3.0 hp, 240V, 20A Single-phase Electric                               | 5.0 hp, 240V, 25A Single-phase Electric                               |
| Flow (US gpm)                    | 2.1  | 2.1   | 3   | 3.3   |
| Pressure (PSI)                   | 1000   | 1100  | 1650  | 2200  |
| Cleaning Units (Flow x Pressure) | 2100   | 2310  | 4950  | 7260  |
| Hose Length                      | 9m (30'ft)   | 9m (30'ft)  | 9m (30'ft)  | 9m (30'ft)  |
| Dimensions (L x W x H)           | 27" x 15.5" x 17"  | 33" x 23" x 27"   | 33" x 24" x 26"   | 33" x 24" x 26"   |
| Shipping Weight                  | 70 lbs   | 95 lbs  | 118 lbs   | 118 lbs   |



# gas-powered industrial pressure washers

## Kodiak Gas Industrial Pressure Washers - For Heavy-duty Results

### Contractor-tough

- Honda GX-powered for high power deep cleaning
- All brass pump heads from General Pump delivers long-lasting performance & hassle-free operation

### Industrial Parts

- General Pump pump & components gives extra life and reliable results every time
- Ceramic plungers and thermal protection define tough industrial standard and added safety

### Versatile

- Innovative design offers optimal portability
- Quick-connect nozzles allow you to easily switch to the right nozzle quickly

### Increased User Comfort

- Reversible cart converts from low-slung position to traditional upright style to suit operator comfort
- 10" pneumatic wheels offers rugged stability wherever you are

**PWCKC3200GPC**

**PWKC3250GPC**

**PWKC4300GPC**

**PWKC4350GPC**



| Model                               | PWCKC3200GPC   | PWKC3250GPC  | PWKC4300GPC   | PWKC4350GPC   |
|-------------------------------------|--|--|---|---|
| Description                         | Kodiak Industrial<br>5.5 hp 2200 PSI<br>Reversible Cart<br>Gas Pressure Washer | Kodiak Industrial<br>6.5 hp 2750 PSI<br>Reversible Cart<br>Gas Pressure Washer | Kodiak Industrial<br>11 hp 3000 PSI<br>Reversible Cart<br>Gas Pressure Washer | Kodiak Industrial<br>13 hp 3500 PSI<br>Reversible Cart<br>Gas Pressure Washer |
| Engine                              | 5.5 hp Honda GX120 OHV   | 6.5 hp Honda GX200 OHV   | 11 hp Honda GX340 OHV   | 13 hp Honda GX390 OHV   |
| Flow (US gpm)                       | 3.3  | 3.3  | 4   | 4   |
| Pressure (PSI)                      | 2 200  | 2 750  | 3 000   | 3 500   |
| Cleaning Units<br>(Flow x Pressure) | 7 260  | 9 075  | 12 000  | 14 000  |
| Hose Length                         | 9m (30'ft)   | 9m (30'ft)   | 15 m (50'ft)  | 15 m (50'ft)  |
| Dimensions<br>(L x W x H)           | 34" x 22" x 21"  | 33" x 23" x 27"  | 33" x 23.5" x 26.5"   | 33" x 23" x 27"   |
| Shipping Weight                     | 90 lbs   | 95 lbs   | 148 lbs   | 150 lbs   |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

A10

www.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## Endura Electric Hot Water Pressure Washers - Plug 'n' play hot water cleaning power!

### Contractor-tough

- ♦ Heavy-duty steel frame with weather and stain resistant polyester coating
- ♦ Powered by Baldor induction engines for durability and reliability
- ♦ Minimize wear and tear on pump and components with low pressure soap injection

### Industrial Parts

- ♦ All brass pump heads from General Pump deliver long-lasting performance and hassle-free operation
- ♦ Triplex ceramic plunger pump and thermal protection define tough industrial standard and provide added safety

### Versatile

- ♦ Plugs into standard 120v (PWKEH1000EF) outlets
- ♦ Quick-connect nozzles included to let you switch easily to the right nozzle quickly and easily
- ♦ 13" pneumatic tires for mobility and stability in rugged conditions

### Safe Design

- ♦ 50' high pressure hose and 48" single lance included for extended reach
- ♦ Built-in fuel oil gauge and hour meter combine to optimize maintenance and operation efficiency



**PWKEH1000EF**

**ENDURA**



| Model           | PWKEH1000EF  |
|-----------------|--|
| Description     | Endura 1000 PSI 1.5hp Electric Hot Water Pressure Washer |
| Motor           | 1.5 hp, 1-phase/115v/14A Baldor Induction Electric Motor |
| PSI             | 1000   |
| RPM             | 1750   |
| BTUs            | 172 000  |
| Shipping Weight | 360 lbs  |



# gas-powered hot water pressure washers

## Endura Gas-powered Hot Water Pressure Washer - Portable hot water cleaning power

- Strength**
  - ♦ Heavy-duty steel frame with weather and stain resistant polyester coating
  - ♦ Powered by Honda GX390 engine for durability and dependable performance
  - ♦ Minimize wear and tear on pump and components with low pressure soap injection
- Quality Components**
  - ♦ Interpump components for strength and long-lasting performance
  - ♦ Triplex ceramic plunger pump and thermal protection define tough industrial safety standards
- Easy to use**
  - ♦ Uses either #1 or #2 fuel oil to fire burner
  - ♦ Electric-start engine for simple start-up and use anywhere
  - ♦ Quick-connect nozzles included to let you switch easily to the right nozzle quickly and easily
  - ♦ 13" pneumatic tires for mobility and stability in rugged conditions
- Efficient**
  - ♦ 50' high pressure hose and 48" single lance included for extended reach
  - ♦ Built-in fuel oil gauge and hour meter combine to optimize maintenance & operation efficiency



| Model           | PWKEH3500GF  |
|-----------------|--|
| Description     | Endura 3500 PSI 13hp Gas Hot Water Pressure Washer |
| Engine          | 13 hp Honda GX390 OHV                              |
| PSI             | 3500   |
| GPM             | 3.8  |
| RPM             | 3600   |
| BTUs            | 300 000  |
| Shipping Weight | 450 lbs  |

### **PWKEH3500GF**

## Modular Fuel Oil Fired Heater - Make it hot!

- Adaptable:**
  - ♦ Converts existing commercial-use pressure washer into hot water units for added versatility
  - ♦ Just plug the 120v Beckett burner into standard household sockets to heat up fuel-oil (#1 or #2) fired burner to clean with hot water power
- Rugged:**
  - ♦ Heavy-duty steel cart frame designed with pre-drilled pump holes for easy attachment of pumping unit and support of large fuel oil tank (upto 8.8 gallons) for longer run-times
  - ♦ 13" pneumatic tires with ball-bearing construction and steel rims and hubs for long-lasting use and stability



### **PWMOD3000F**

| Model                          | PWMOD3000F   |
|--------------------------------|--|
| Description                    | Modular Fuel-oil Fired Pressure Washer Heater Unit |
| Power Requirement              | 120v   |
| PSI                            | 3000   |
| GPM                            | 3.8  |
| BTUs                           | 300 000  |
| Working Dimensions (L x W x H) | 54" x 30" x 45"                                    |
| Shipping Weight                | 390 lbs  |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

Update: 08A06UNICATE

A12

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

# p ressure washer accessories

## Kodiak Concentrated Detergents - A Chemical for Every Job

### Heavy-duty Degreaser

- ♦ Cleans grease and oil stains from most surfaces
- ♦ Effectively cleans engines, blacktop, concrete, driveways, sidewalks, BBQ grills and more!
- ♦ Professional strength, biodegradable solution

### Deck & Fence Cleaner

- ♦ Renews the surface of most wood decks, fences, porches and stairs
- ♦ Removes accumulated dirt, grime, sap and stains caused by leaves, mold and mildew
- ♦ Professional strength, biodegradable solution

### All-Purpose Cleaner

- ♦ Removes dirt and grime from most hard surfaces including aluminum, lexan, plexiglass, enameled and lacquered surfaces and more!
- ♦ Professional strength, biodegradable solution

### House & Window Cleaner

- ♦ Removes dirt and grime from house exteriors including windows, screens, eavestroughs, bricks, stone, vinyl or aluminium siding and more!
- ♦ Professional strength, biodegradable solution

### Car & Boat Wash 'n' Wax

- ♦ Removes stubborn dirt and road grime, leaving a protective wax coating on the vehicle surface
- ♦ Effectively cleans cars, vans, trucks, boats, RVs, campers, commercial vehicles and more!
- ♦ Professional strength, biodegradable solution



### Kodiak Concentrated Detergents

| Product No.  | Description             |
|--------------|-------------------------|
| BKKODIAKDEG4 | Heavy-Duty Degreaser    |
| BKKODIAKDFC4 | Deck & Fence Cleaner    |
| BKKODIAKAPC4 | All-Purpose Cleaner     |
| BKKODIAKHWW4 | House & Window Cleaner  |
| BKKODIAKCBW4 | Car & Boat Wash 'n' Wax |

## Kodiak Pressure Washer Accessories - Enhance Your Performance

### Quick Connectors

| Product No. | Description              |
|-------------|--------------------------|
| BKQCKIT     | Quick Connect Kit        |
| BKQ7214     | Quick Connect Tip Holder |

### High Density Hose

| Product No. | Description                     |
|-------------|---------------------------------|
| BKHW30      | 30' ft Hose 0.375" M x 0.375" M |
| BKHW50      | 50' ft Hose 0.375" M x 0.375" M |

### Wands

| Product No. | Description                       |
|-------------|-----------------------------------|
| BKL70       | 70 cm Wand 0.25" M x 0.25" M      |
| BKL90       | 90 cm Wand 0.25" M x 0.25" M      |
| BKSANDD     | Sandblasting Kit with 90 cm lance |

### Spray Guns

| Product No. | Description                       |
|-------------|-----------------------------------|
| BKRL35      | 0.375" x 0.25" 3600 PSI Spray Gun |
| BKG250VA    | 0.375" x 0.25" 4060 PSI Spray Gun |

### Nozzles

| Product No. | Description                        |
|-------------|------------------------------------|
| BKASN       | 0.25" F Adjustable Nozzle Holder   |
| BKROTOA     | 1000 PSI 70 cm Lance Rotary Nozzle |
| BKROTOB     | 2000 PSI 70 cm Lance Rotary Nozzle |
| BKROTOC     | 3000 PSI 90 cm Lance Rotary Nozzle |

### Quick Connect Nozzles

| Product No.  | Description             |
|--------------|-------------------------|
| BKQCMEG00045 | Red 0° Spray Nozzle     |
| BKQCMEG15045 | Yellow 15° Spray Nozzle |
| BKQCMEG25045 | Green 25° Spray Nozzle  |
| BKQCMEG40045 | White 40° Spray Nozzle  |
| BKQCEM2540   | Black soap spray nozzle |

## Mosa New 4-Stroke Welder/Generator - Truly portable to go where others can't.

### Innovative

- ♦ New 4-stroke Honda GX-powered welder meets stringent EPA standards for environmental protection
- ♦ Get powerful 2500w generator performance as well as excellent welding ability

### Low Maintenance

- ♦ Full electronic current control for added safety
- ♦ Brushless design for maintenance free operation

### Easy to Use

- ♦ Lightweight compact design for portability
- ♦ Operates 6010 and 7018 electrodes for various welding needs
- ♦ Complete industrial strength welding electrodes handles & grounded clamp handle included for operation straight out of the box



### **BUMPM165**

Compact design is easy to carry with you anywhere.

| Model                            | BUMPM165                                  |
|----------------------------------|---|
| Description                      | 6.5 hp Mosa 4-stroke Engine-driven Welder |
| Engine                           | 6.5 hp Honda GX200 OHV                    |
| Rated Generator Output (110V DC) | 2500 watt                                 |
| Tank Capacity                    | 3.5 l (0.92 USG)                          |
| Avg.Run Time/tank (hrs)          | 3.5 hrs                                   |
| Rated CC DC Output               | 150A / 60% duty cycle                     |
| Welding Output (DC/CC)           | 40 - 165A                                 |
| Dimensions (L x W x H)           | 18" x 14.5" x 18.5"                       |
| Shipping Weight                  | 100 lbs                                   |

# heavy-duty reversible compactor

## TRMV440DY

Robust hood easily opens for maintenance and locks for safe storage



| Model               | TRMV440DY   |
|---------------------|---|
| Description         | Tremix 10.0 hp 1 000 lb Diesel Reversible Compactor |
| Engine              | Yanmar Electric Start 10.0 hp Diesel L100AEDE       |
| Centrifugal Force   | 13500 lbs   |
| Amplitude           | 0.0075"   |
| Vibration Frequency | 60 Hz   |
| Working Speed       | up to 79' ft/min                                    |
| Plate size (W x L)  | 36" x 30"   |
| Working Weight      | 1020 lbs  |
| Shipping Weight     | 1016 lbs  |

## Tremix Heavy Duty Reversible Compactor - Contractor's Choice for Large Jobs

- Strength**
  - ♦ Electric-start Yanmar diesel-powered 10.0 hp engine for reliable power
  - ♦ 13 500 lbs of constant compaction power at any speed delivers full compaction at all times
- Cost-effective**
  - ♦ Lockable hood protects against vandalism and decreases maintenance costs
  - ♦ Diesel-powered for increased fuel-efficiency
- Service-friendly**
  - ♦ Unique belt tensioning design allows for replacement and tension adjustment without any tools
  - ♦ Protective hood fully opens for easy service and maintenance
- Ergonomic Design**
  - ♦ Anti-vibration handle equipped with "dead man's grip" safety design for increased user comfort and safety
  - ♦ Stepless speed selection and manoeuvrability in confined areas leads to less repetitive operator strain

## Tremix Professional Series Reversible Compactors- Versatility and Power

- Performance**
  - ♦ 20" x 18" compacting surface rapidly covers jobsite
  - ♦ 8 100 lbs of compaction force delivers deep and even compaction on all surfaces
- Variety**
  - ♦ Various engine and starting configurations lets you choose the right compactor for the right job
  - ♦ Hydrostatic forward/reverse regulation increases manoeuvrability and reliability for jobs that require multiple passes
- Added Efficiency**
  - ♦ Working speeds up to 82'ft/minute increases your efficiency and reduces labour consumption without sacrificing quality
  - ♦ Protective plastic cover opens up quickly for easy onsite maintenance and service
- Jobsite Protection**
  - ♦ Low hand/arm vibration decreases operator injury and fatigue
  - ♦ Stepless regulation of compaction depth and speed through hydraulic servo inside eccentric leads to smooth compactor operation and increased operator safety
- Advanced Design**
  - ♦ Advanced Hardox 400 cast steel compaction plate withstands heavy use and provides extended life
  - ♦ Contractor-tough roll cage and plastic covers protects engine from jobsite damage



Protective cover can be easily removed or opened for servicing



**TRMV220H**

**TRMV230DH**

**TRMV245DHE**

| Model                      | TRMV220H  | TRMV230DH  | TRMV245DHE  |
|----------------------------|---|--|---|
| <b>Description</b>         | Tremix 6.5 hp 500 lb Honda Gas Reversible Compactor | Tremix 4.0 hp 500 lb Diesel Reversible Compactor | Tremix 4.0 hp 550 lb Electric Start Diesel Reversible Compactor |
| <b>Engine</b>              | 6.5 hp Honda GX200 OHV                              | 4.0 hp Hatz Diesel                               | 4.0 hp Hatz Electric Start Diesel                               |
| <b>Centrifugal Force</b>   | 8100 lbs  | 8100 lbs   | 8100 lbs  |
| <b>Amplitude</b>           | 0.0075" inch  | 0.0075" inch                                     | 0.0075" inch  |
| <b>Vibration Frequency</b> | 65 Hz (3900 vpm)                                    | 65 Hz (3900 vpm)                                 | 65 Hz (3900 vpm)  |
| <b>Working Speed</b>       | up to 82' ft/min                                    | up to 82' ft/min                                 | up to 82' ft/min  |
| <b>Plate size (W x L)</b>  | 20" x 28"   | 20" x 28"  | 20" x 28"   |
| <b>Working Weight</b>      | 489 lbs   | 518 lbs  | 551 lbs   |
| <b>Shipping Weight</b>     | 485 lbs   | 514 lbs  | 547 lbs   |

## Tremix Contractor Series Forward Soil Compactors - Steady and Consistent Performance

- Strength** ♦ Honda GX-series engines delivers reliable gas power with every start
- Simplicity** ♦ Throttle lever mounted on handle for easy manoeuvring
- Cost-effective** ♦ High compacting performance gives extra performance for your investment  
♦ Resistant steel welded bottom plate for extended equipment life
- Portability** ♦ Folding handle lets compactor increases manoeuvrability and storage options  
♦ Equipped with lifting device to allow operator to safely and easily transport compactor from vehicle to jobsite



**TRMV40H**

**TRMV65H**

**TRMV80GX**

| Model                      | TRMV40H                                     | TRMV65H                                      | TRMV80GX                                     |
|----------------------------|---|--|--|
| <b>Description</b>         | Tremix 3.0 hp 90 lbs Forward Soil Compactor | Tremix 4.0 hp 130 lbs Forward Soil Compactor | Tremix 5.5 hp 175 lbs Forward Soil Compactor |
| <b>Engine</b>              | 3.0 hp Honda GX100                          | 4.0 hp Honda GX120                           | 5.5 hp Honda GX160                           |
| <b>Centrifugal Force</b>   | 1798 lbs                                    | 2250 lbs                                     | 4046 lbs                                     |
| <b>Amplitude</b>           | 0.039" inch                                 | 0.035" inch                                  | 0.040" inch                                  |
| <b>Vibration Frequency</b> | 100 Hz (6000 rpm)                           | 92 Hz (5500 rpm)                             | 90 Hz (3600 rpm)                             |
| <b>Working Speed</b>       | 82' ft/min                                  | 79' ft/min                                   | 82' ft/min                                   |
| <b>Plate size (W x L)</b>  | 11.5" x 17.25"                              | 13" x 20"                                    | 18" x 21"                                    |
| <b>Working Weight</b>      | 93 lbs                                      | 132 lbs                                      | 179 lbs                                      |
| <b>Shipping Weight</b>     | 90 lbs                                      | 128 lbs                                      | 174 lbs                                      |

## Tremix Contractor Series Forward Asphalt Compactors - Compaction with a Twist

- Low Maintenance:**
  - ♦ Extends the life and performance of the machine with automatic belt tensioner by optimizing the belt for tension, thus limiting wear and tear
- Multi-functional**
  - ♦ Built-in water tank lets you work on asphalt as well as soil and gravel
  - ♦ Hardox 400 welded steel bottom plate with curved edges delivers extra-tough compaction and durability without marring material surface
- Easy to Transport**
  - ♦ Wheels on handle base lets user quickly wheel unit around jobsite
  - ♦ Safety lifting device allows operator to easily transport compactor from vehicle to jobsite

| Model                      | TRMV70AH  | TRMV92AH  |
|----------------------------|---|---|
| <b>Description</b>         | Tremix 4.0 hp 170 lbs Forward Asphalt Compactor | Tremix 4.0 hp 225 lbs Forward Asphalt Compactor |
| <b>Engine</b>              | 4.0 hp Honda GX120                              | 4.0 hp Honda GX120                              |
| <b>Centrifugal Force</b>   | 2248 lbs  | 2575 lbs  |
| <b>Vibration Frequency</b> | 80 Hz   | 100 Hz (6000 vpm)                               |
| <b>Working Speed</b>       | about 72' ft/min                                | about 66' ft/min                                |
| <b>Plate size (W x L)</b>  | 15.75" x 23"                                    | 21" x 21"                                       |
| <b>Water Tank Size</b>     | 10 L  | 17 L  |
| <b>Working Weight</b>      | 167 lbs   | 225 lbs   |
| <b>Shipping Weight</b>     | 163 lbs   | 205 lbs   |

**TRMV70AH**



**TRMV92AH**

# Vibratory tampers

## Tremix Vibratory Tampers - For Maximum Mobility and Compaction Needs

### Ergonomic Design

- Strong and strategically-placed shock absorbers for lower hand/arm vibration
- Throttle control with fixed position on handle for easy control of tamper

### Hassle-free Operation

- Well-balanced transmission system for long, trouble-free working life
- Spring-loaded throttle control ensures stable rpm and performance
- Dual spring system for optimized traction and compaction

### Heavy-duty Design

- High wear-resistance 6mm steel plate protects plastic foot for extended life and reduced noise
- Rubber bellows for longer service
- Integrated roller in handle for easy transport
- Single lifting point on crank case prevents unnecessary wear on shock absorbers

Durable low noise and low emission tamper version Honda GX engines



**TRMS620**

**TRMS680**

Flip tamper over using lifting handle and roll it anywhere on integrated roller handle



| Model                  | TRMS620                        | TRMS680                        |
|------------------------|--------------------------------|--------------------------------|
| Description            | Tremix 3.0 hp Vibratory Tamper | Tremix 4.0 hp Vibratory Tamper |
| Engine                 | 3.0 hp Honda GX100 OHV         | 4.0 hp Honda GX120 OHV         |
| Output HP              | 2.2 kW/3600 rpm                | 2.5 kW/3600 rpm                |
| Impact Force           | 2250 lbs                       | 3600 lbs                       |
| Amplitude              | 0.25" - 0.30"                  | 0.25" - 0.30"                  |
| Stroke                 | 1.57"                          | 2.52"                          |
| Working Speed          | 49' - 59'/minute               | 49' - 59'/minute               |
| Shoe Size (W x L)      | 9" x 13"                       | 11" x 13"                      |
| Dimensions (L x W x H) | 32" x 16.5" x 42"              | 32" x 16.5" x 42"              |
| Shipping Weight        | 138 lbs                        | 154 lbs                        |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

Update: 08A06UNICATE

B5

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221





**SE25CMPT**



**SE25CMP**

## Stone Concrete Mixers - Jobsite tough

### Space-conscious

- ♦ Compact and sturdy design sets up on any jobsite
- ♦ Available in both pedestal and wheelbarrow versions to suit your needs

### Easy-loading

- ♦ Poly drum swivels 360 degrees for loading and unloading at any angle

### Portable

- ♦ Disassembles quickly into three sections for easy transportation to and from jobsites

| Model                  | SE25CMP                                  | SE25CMPT                              |
|------------------------|--|---------------------------------------|
| Description            | Stone 2 cu.ft Wheelbarrow Concrete Mixer | Stone 2 cu.ft Pedestal Concrete Mixer |
| Motor                  | 1/3 hp, 115v, 15A Single-phase           | 1/3 hp, 115v, 15A Single-phase        |
| Dry Capacity           | 3.5 cu.ft                                | 3.5 cu.ft                             |
| Wet Capacity           | 2 cu.ft                                  | 2 cu.ft                               |
| Motor Speed            | 1725 rpm                                 | 1725 rpm                              |
| Drum Speed             | 31 rpm                                   | 31 rpm                                |
| Net Weight             | 113 lbs                                  | 123 lbs                               |
| Dimensions (L x W x H) | 50" x 24.25" x 40"                       | 38.75" x 29.75" x 54.75"              |
| Shipping Weight        | 320 lbs                                  | 320 lbs                               |



## Stone Contractor Concrete & Mortar Mixers - Tough. Dependable. Solid.

### Performance

- ♦ Exclusive cowl design provides 21% more volume of air to engine for increased power & performance

### Heavy-duty Construction

- ♦ One piece cast iron ring gear delivers smooth operation and longer service life
- ♦ Reinforced front post provides maximum strength to high-stress area

### Control

- ♦ Specially designed gears position drum to accommodate mixing or storage needs




**SE65CM8HP**

**SE655PM8HP**



| Model                  | SE655PM8HP                              | SE65CM8HP                                 |
|------------------------|---|---|
| Description            | Stone 6 cu.ft 8.0 hp Honda Mortar Mixer | Stone 6 cu.ft 8.0 hp Honda Concrete Mixer |
| Engine                 | 8.0hp Honda GX240 OHV                   | 8.0hp Honda GX240 OHV                     |
| Dry Capacity           | 6.9 cu.ft                               | 9.0 cu.ft                                 |
| Wet Capacity           | 6 cu.ft                                 | 6 cu.ft                                   |
| Net Weight             | 550 lbs                                 | 690 lbs                                   |
| Dimensions (L x W x H) | 64" x 34" x 54"                         | 78" x 46" x 58"                           |
| Shipping Weight        | 1000 lbs                                | 1204 lbs                                  |

# C oncrete vibrators

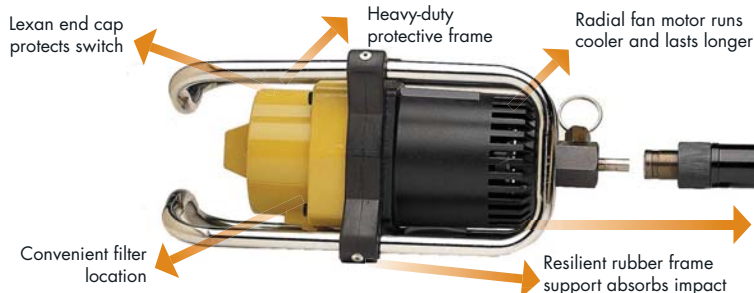

**WY902DI**

**WY903DI**

## Wyco Concrete Vibration System - Smooth. Solid. Professional.

### Performance


- ♦ Exclusive Square-head design for 50% more efficient concrete consolidation than leading round-head design
- ♦ High strength and non-conductive materials along with sturdy construction combine for extended service and brush life

### Power

- ♦ Wyco's High-Efficiency motor design delivers more torque with less amps to retain speed even through heavier loads and operate longer shafts and larger heads

### Contractor-tough

- ♦ Lexan end cap protects unit from moisture and concrete damage
- ♦ Double-insulated motor protects unit from jobsite abuse and electrical current passing through to operator



**Round Head  
vs Square Head**  
Experience  
the Wyco difference.

| For use with:   | Length  | Casing   | Core    | Head Size   | Product No. |
|---|---------|--|---------|---|-------------|
| <br><b>WY902DI</b><br>12A Vibrator Motor |         |    |         | Use with 12A motor  |             |
|   | 7' ft.  | WYK8907  | WYC9007 |   |             |
|   | 10' ft. | WYK8910  | WYC9010 |  | WY750D      |
|   | 14' ft. | WYK8914  | WYC9014 |  | WY750EH     |
|   | 20' ft. | WYK8920  | WYC9020 |   |             |
|   |         |  |         |   |             |
|   | 7' ft.  | WYK9307  | WYC9207 |  | WY750FI     |
|   | 10' ft. | WYK9310  | WYC9210 |  | WY750GI     |
|   | 14' ft. | WYK9314  | WYC9214 |   |             |
|   | 20' ft. | WYK9320  | WYC9220 |   |             |
| For use with:   | Length  | Casing   | Core    | Head Size   | Product No. |

|   |         |  |         |   |          |
|---|---------|--|---------|---|----------|
| <br><b>WY903DI</b><br>15A Vibrator Motor |         |  |         | *Use only with 15A motor  |          |
|   | 7' ft.  | WYK9307  | WYC9207 |  | WY750FI  |
|   | 10' ft. | WYK9310  | WYC9210 |  | WY750GI  |
|   | 14' ft. | WYK9314  | WYC9214 |  | WY750LI* |
|   | 20' ft. | WYK9320  | WYC9220 |  | WY750MI* |

**English Assistance**

(T) 1.888.332.4012 (F) 1.866.567.0956

**C2**

**www.uniquip.ca**

**French Assistance**

(T) 1.800.332.4012 (F) 1.866.825.2221

# Vibratory screed & power trowel

## TR32873



| Model                      | TR32873  |
|----------------------------|--|
| Description                | Tremix Easy Strike Vibratory Screed Drive Unit |
| Engine                     | 1.5 hp Honda GX31 OHV                          |
| Tank Capacity              | 0.62 qt  |
| Outgoing Shaft Revolutions | 2000 - 10000 rpm                               |
| Frequency                  | up to 166 Hz                                   |
| Maximum Centrifugal Force  | 3460 N   |
| Weight                     | 30 lbs   |
| Shipping Weight            | 120 lbs  |

## Tremix Easy-Strike - Vibratory Concrete Screed

- Versatility**
  - ♦ Drive unit operates varying screed sizes from 6' ft. up to 14' ft to adapt to any job size
  - ♦ Delivers quality product finish and stability on concrete with combined vibration and screeding abilities
- Durability**
  - ♦ Honda GX-powered unit delivers reliable power for extended performance life
- Portability**
  - ♦ Compact and lightweight design lets you bring professional results everywhere

### Easy Strike Screeds

| Product No. | Description    |
|-------------|----------------|
| TR32958     | 6' ft. Screed  |
| TR32959     | 8' ft. Screed  |
| TR32918     | 10' ft. Screed |
| TR32960     | 12' ft. Screed |
| TR32961     | 14' ft. Screed |

# TREMIX®

## Tremix Power Trowel - For professional results


- Strength**
  - ♦ Three-ring construction on protective trowel cage for increased strength and protection of trowel blades for demanding jobsite use
- Safety**
  - ♦ Dead man's grip design ensures operator safety with automatic shut-off feature
- Simplicity**
  - ♦ Change and replace blades quickly and easily with cotter key system
  - ♦ Use with finishing, float or combination blades to suit your needs



## TRG903B

| Model                           | TRG903B                             |
|---------------------------------|-------------------------------------|
| Description                     | Tremix 5.5 hp Power Concrete Trowel |
| Engine                          | 5.5 hp Honda GX120 OHV              |
| Working Diameter                | 37.5" inches                        |
| Trowelling Diameter             | 36" inches                          |
| Working Weight                  | 152 lbs                             |
| Working Dimensions (L x W x H)  | 5.84'ft. x 3.12'ft. x 3.12'ft.      |
| Shipping Dimensions (L x W x H) | 5.84'ft. x 3.12'ft. x 2.59'ft.      |
| Shipping Weight                 | 550 lbs                             |

### 36" Trowel Blades

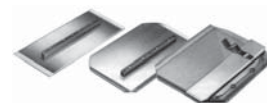

| Product No. | Description       |
|-------------|-------------------|
| GRWX-614F   | Finishing Blade   |
| GRWX-814C   | Combination Blade |
| GRWX-1014FO | Float Blade       |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

C3

www.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

# hydraulic breaker

## JCB Hydraulic Breaker Kit - Driven for Performance

- Powerful** ♦ Powered by 8 hp Honda GX240 engine to provide both strength and mobility in a compact design
- User-friendly** ♦ Low vibration construction on hydraulic breaker unit ensures operator comfort and jobsite safety
- ♦ Sealed system delivers power at low noise levels to meet stringent worksite safety standards
- Quality** ♦ Spring handle on breaker allows for extended performance life and reduced vibration for increased user comfort
- ♦ Advanced hydraulic system and components deliver 25% increase in efficiency makes it an ideal replacement for comparable towable air compressors
- ♦ Low maintenance



### JCB994/10695-96

|  |  |
|--|--|
| <b>Model</b>                           | <b>JCB994/10695-96</b>                         |
| <b>Description</b>                     | JCB 8hp Powerpack and Hydraulic Breaker Kit    |
| <b>Working Dimensions (L x W x H)</b>  | Breaker = 30" L<br>Powerpack = 28" x 23" x 29" |
| <b>Working Weight</b>                  | 200 lbs  |
| <b>Shipping Dimensions (L x W x H)</b> | 48" x 48" x 30"                                |
| <b>Shipping Weight</b>                 | 400 lbs  |



### Points and Chisels for Hydraulic Hammer



| Product No. | Description       |
|-------------|-------------------|
| JCB116-0214 | 14" Point         |
| JCB116-0314 | 14" Chisel        |
| JCB116-2314 | 3" x 14" Chisel   |
| JCB116-3105 | 5" Asphalt Chisel |



### JCB994/10696

#### Powerpack Specifications

|  |                         |
|--|-------------------------|
| <b>Description</b>                     | JCB HP300 8hp Powerpack |
| <b>Engine</b>                          | 8hp Honda GX240 OHV     |
| <b>Hydraulic Flow (US gpm)</b>         | 0 - 5                   |
| <b>Max. Pressure (psi)</b>             | 1300                    |
| <b>Hydraulic Oil Capacity</b>          | 1.3 USG (5 L)           |
| <b>Working Dimensions (L x W x H)</b>  | 28" x 23" x 29"         |
| <b>Working Weight</b>                  | 200 lbs                 |
| <b>Shipping Dimensions (L x W x H)</b> | 48" x 48" x 30"         |
| <b>Shipping Weight</b>                 | 400 lbs                 |

#### Hydraulic Hammer Specifications

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| <b>Model</b>                      | <b>JCB994/10696</b>                  |
| <b>Description</b>                | JCB HM25 Hydraulic Breaker           |
| <b>Steel Size</b>                 | 1-1/8" x 6"                          |
| <b>Noise Level (DBA)</b>          | 109                                  |
| <b>Vibration</b>                  | 4                                    |
| <b>HTMA Category</b>              | C                                    |
| <b>Flow Rate (US gpm)</b>         | 4.7 - 5.8                            |
| <b>Pressure Range</b>             | 1305 - 1595                          |
| <b>Min. relief Valve Settings</b> | 1595                                 |
| <b>Acc. Gas Pressure</b>          | 725                                  |
| <b>Special Note</b>               | Available separately as JCB994/10696 |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

C4

www.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## Bosch Brute Breaker Hammer Kit - The Plug-In-Anywhere Brute Breaker Hammer

### Total Portability

- ♦ Plug in either 120v/15A AC/DC outlet or 2500w portable generator to work everywhere
- ♦ One-piece design delivers forceful impact without needing a compressor
- ♦ Rugged 1" diameter all welded steel frame cart with heavy-duty rubber tie-down for convenient storage and transportation

### Low-maintenance

- ♦ Service Minder™ brush system automatically shuts hammer off when brush replacement, lubrication or preventative maintenance is required
- ♦ Grease-packed gearbox and hammer mechanism eliminates uncertain jobsite lubrication

### User Friendly

- ♦ Shock-mounted handles absorbs vibration to reduce operator fatigue
- ♦ Innovative 2-way Tool Retainer accepts standard 1-1/8" hex, air tool steel with retaining collar or Bosch internal locking combo steel



| Model          | BO11304K                       |
|----------------|--------------------------------|
| Description    | Bosch Brute Breaker Hammer Kit |
| Motor          | 120v / 15A                     |
| No load BPM    | 1400                           |
| Impact Energy  | 43' ft/lb                      |
| Length         | 29.75"                         |
| Working Weight | 64 lbs                         |

## BO11304K



## Cardi Electric Hand-held Core Drills - Trust in Technology

### User-friendly

- ♦ Plastic carrying case included for portability
- ♦ Cuts both wet and dry concrete for flexibility

### Innovative

- ♦ Innovative "smart electronics" system monitors drill performance to prevent burnouts and provide better performance and reliability
- ♦ Improved gear box design for better rpm results

### Ready to work

- ♦ 1.25" shaft with 5/8" adapter included
- ♦ Drill from 2" to 5" in wet or dry concrete



| Model                  | GOT1800-102-EL  |
|------------------------|---|
| Description            | Cardi 2.0 hp Single-speed Electric Hand Held Core Drill |
| Motor                  | 2.0 hp, 120v, 15A                                       |
| Frequency              | 60 Hz   |
| No load RPM            | 940   |
| Full Load RPM          | 740   |
| Output Power           | 1200w   |
| Dimensions (L x W x H) | 20" x 14" x 7"  |
| Net Weight             | 20 lbs  |
| Shipping Weight        | 20 lbs  |

Carrying case included for easy transport around jobsite.

## GOT1800-102-EL-CC

# gas-powered core drill & core bits



**GÖLB200**

## Gölz Gas-powered Core Drill - Drill with Authority

- Dependable** ♦ Stihl-powered 2-stroke 4.1 hp engine delivers everytime
- Versatile** ♦ Drill from 1" in. to 8" in. safely and effectively with included water swivel
- Simple** ♦ Sets up quickly for safe operation  
♦ Includes 13" exhaust hose to divert exhaust fumes away from operator & immediate work area

**GÖLZ**  
Professional  
in Diamond


| Model                     | GÖLB200<br>(core bits sold separately)             |
|---------------------------|--|
| Description               | Gölz 4.1 hp Stihl Gas-powered Hand Held Core Drill |
| Engine                    | 4.1 hp Stihl 2-stroke                              |
| Speed Range               | 600 rpm  |
| Dimensions<br>(L x W x H) | 19" x 12" x 19"                                    |
| Net Weight                | 29 lbs   |
| Shipping Weight           | 29 lbs   |

## StarDiamond ZigZag™ Wet Diamond Core Bits- Built for Speed

- Speedy Drilling** ♦ Go through reinforced concrete rapidly and efficiently with professional turbo segment design
- Low Maintenance** ♦ Easily remove core bit from jams with the innovative flip-top barrel in the ZigZag™ family of wet coring bits!
- Durable** ♦ High diamond concentration and extra strong laser-welded segments reduce segment loss



**ZIGZAG**  
Built for Speed / Made to Last™



**Flip Top™ Barrel**  
Remove jammed cores easily! Just unscrew the Flip-Top back adaptor plate. Available on all Zig Zag core bits.

| StarDiamond ZigZag Wet Diamond Core Bits |                 |             |                |
|--|-----------------|-------------|----------------|
| Product No.                              | Size            | Product No. | Size           |
| SD30121                                  | 1" in. diam.    | SD30453     | 4.5" in. diam. |
| SD30127                                  | 1.25" in. diam. | SD30502     | 5" in. diam.   |
| SD31150                                  | 1.5" in. diam.  | SD30621     | 6" in. diam.   |
| SD30176                                  | 1.75" in. diam. | SD30702     | 7" in. diam.   |
| SD30221                                  | 2" in. diam.    | SD30802     | 8" in. diam.   |
| SD30253                                  | 2.5" in. diam.  | SD30902     | 9" in. diam.   |
| SD30321                                  | 3" in. diam.    | SD31002     | 10" in. diam.  |
| SD30352                                  | 3.5" in. diam.  | SD31201     | 12" in. diam.  |
| SD30421                                  | 4" in. diam.    | SD31406     | 14" in. diam.  |
| SD30427                                  | 4.25" in. diam. |             |                |

**English Assistance**

(T) 1.888.332.4012 (F) 1.866.567.0956

**C6**

**WWW.UNIQUIP.CA**

**French Assistance**

(T) 1.800.332.4012 (F) 1.866.825.2221

## Core Bits



| Product No. | Description |
|-------------|-------------|
| CK3321      | 1-3/16"     |
| CK3322      | 1-3/8"      |
| CK3323      | 1-9/16"     |
| CK3324      | 1-3/4"      |
| CK3325      | 2"          |
| CK3326      | 2-1/4"      |
| CK3327      | 2-1/2"      |
| CK3328      | 3"          |
| CK3329      | 3-1/8"      |
| CK3330      | 3-1/2"      |
| CK3331      | 4"          |
| CK3332      | 5"          |
| CK3333      | 4-1/2"      |

## Adaptor Shanks for Core Drills



| Product No. | Description    |
|-------------|----------------|
| CK4530      | 120 mm Adaptor |
| CK4531      | 250 mm Adaptor |
| CK4532      | 16" Adaptor    |

## Extension Rods and Accessories for Core Drills



| Product No. | Description                 |
|-------------|-----------------------------|
| CK4502      | 250 mm 'K' Taper Extension  |
| CK4503      | Extractor Drift for AD3120  |
| CK4505      | 400 mm 'K' Taper Extension  |
| CK3338      | 11 mm 'A' Taper Pilot Drill |

## Integral Shanks for Core Drills



| Product No. | Description                            |
|-------------|--|
| CK4514      | 310 mm Kango 950 Integral Drill Holder |
| CK4515      | 410 mm Kango 950 Integral Drill Holder |
| CK4516      | 180 mm Bosch Spline                    |
| CK4517      | 250 mm Bosch Spline                    |
| CK4518      | 400 mm Bosch Spline                    |
| CK4545      | SDS MAX 250 mm Integral Shank          |
| CK4546      | SDS MAX 400 mm Integral Shank          |

## Spline Bits



| Product No. | Description      |
|-------------|------------------|
| GLPB37512   | 3/8" X 12"       |
| GLPB37518   | 3/8" X 18"       |
| GLPB50012   | 1/2" X 12"       |
| GLPB50018   | 1/2" X 18"       |
| GLPB56212   | 9/16" X 12"      |
| GLPB56218   | 9/16" X 18"      |
| GLPB62512   | 5/8" X 12"       |
| GLPB62518   | 5/8" X 18"       |
| GLPB75012   | 3/4" X 12"       |
| GLPB75018   | 3/4" X 18"       |
| GLPB87512   | 7/8" X 12"       |
| GLPB87518   | 7/8" X 18"       |
| GLPB100012  | 1" X 12"         |
| GLPB100018  | 1" X 18"         |
| GLPB100023  | 1" X 23-1/2"     |
| GLPB112518  | 1-1/8" X 18"     |
| GLPB112523  | 1-1/8" X 23-1/2" |
| GLPB125018  | 1-1/4" X 18"     |
| GLPB125023  | 1-1/4" X 23-1/2" |
| GLPB137518  | 1-3/8" X 18"     |
| GLPB137523  | 1-3/8" X 23-1/2" |
| GLPB150018  | 1-1/2" X 18"     |
| GLPB150023  | 1-1/2" X 23-1/2" |

## SDS Drill Bits



| Product No. | Description     |
|-------------|-----------------|
| GLSDS1566   | 5/32" X 6 5/8 " |
| GLSDS1874   | 3/16" X 5 5/8 " |
| GLSDS1876   | 3/16" X 6 5/8 " |
| GLSDS1878   | 3/16" X 8 5/8 " |
| GLSDS25011  | 1/4" X 11-5/8"  |
| GLSDS2504   | 1/4" X 4-5/8"   |
| GLSDS2506   | 1/4" X 6-5/8"   |
| GLSDS2508   | 1/4" X 8-5/8"   |
| GLSDS31212  | 5/16" X 12-5/8" |
| GLSDS3126   | 5/16" X 6-5/8"  |
| GLSDS37510  | 3/8" X 10-5/8"  |
| GLSDS37512  | 3/8" X 12-5/8"  |
| GLSDS3756   | 3/8" X 6-5/8"   |
| GLSDS50010  | 1/2" X 10-5/8"  |
| GLSDS50012  | 1/2" X 12-5/8"  |
| GLSDS50018  | 1/2" X 18-5/8"  |
| GLSDS5626   | 9/16" X 6-3/4"  |
| GLSDS62512  | 5/8" X 12-3/4"  |
| GLSDS62518  | 5/8" X 18-3/4"  |
| GLSDS62524  | 5/8" X 24"      |
| GLSDS6259   | 5/8" X 9-3/4"   |
| GLSDS75012  | 3/4" X 12-3/4"  |
| GLSDS75018  | 3/4" X 18-3/4"  |
| GLSDS7506   | 3/4" X 6-3/4"   |
| GLSDS7509   | 3/4" X 9-3/4"   |
| GLSDS87512  | 7/8" X 12-3/4"  |
| GLSDS87518  | 7/8" X 18-3/4"  |
| GLSDS8756   | 7/8" X 6-3/4"   |
| GLSDS100010 | 1" X 10-3/4"    |
| GLSDS100018 | 1" X 18-3/4"    |
| GLSDS112512 | 1-1/8" X 12"    |

## SDSMAX Bits



| Product No. | Description  |
|-------------|--------------|
| GLPM37513   | 3/8" X 13"   |
| GLPM50013   | 1/2" X 13"   |
| GLPM50021   | 1/2" X 21"   |
| GLPM56213   | 9/16" X 13"  |
| GLPM56221   | 9/16" X 21"  |
| GLPM62513   | 5/8" X 13"   |
| GLPM62521   | 5/8" X 21"   |
| GLPM75013   | 3/4" X 13"   |
| GLPM75021   | 3/4" X 21"   |
| GLPM87513   | 7/8" X 13"   |
| GLPM87521   | 7/8" X 21"   |
| GLPM100013  | 1" X 13"     |
| GLPM100021  | 1" X 21"     |
| GLPM100036  | 1" X 36"     |
| GLPM112513  | 1-1/8" X 13" |
| GLPM112521  | 1-1/8" X 21" |
| GLPM125015  | 1-1/4" X 15" |
| GLPM125021  | 1-1/4" X 21" |
| GLPM150021  | 1-1/2" X 21" |

## K' Taper Adapters



| Product No. | Description   |
|-------------|---|
| CK3102      | Drill Holder for AEG, Black & Decker, Bosch, Impex, Metabo, Milwaukee, Phillips, & Ryobi Drills |
| CK3108      | Drill Holder for Kango 500, 501, & 637  |
| CK3109      | Drill Holder for Kango 950 series, 978, 750, & Makita HR3850K & HR 5000K                        |
| CK3291      | Drill Holder for SDS Plus Machines  |
| CK5612      | Drill Holder for SDS MAX  |

# C Carbide chisels, points, & k-taper bits and manual bullfloat

## Chisels and Points



| Product No. | Description                       |
|-------------|-----------------------------------|
| GLCCLAY     | Clay Spade For Spline 4" X 15"    |
| GLCCLAYDX   | Clay Spade For Kango 950 5" X 18" |
| GLCCLAYTE   | Clay Spade For SDSMax 4" X 15"    |
| GLCFSDS     | Sds Plus Chisel 3/4" X 10"        |
| GLCF12      | 12" Flat-Cold Chisels Spline      |
| GLCF12TE    | 12" Flat-Cold Chisels SDSMax      |
| GLCF18      | 18" Flat-Cold Chisels Spline      |
| GLCF18TE    | 18" Flat-Cold Chisels SDSMax      |
| GLCMSDS     | SDS Plus Point 3/4" X 10"         |
| GLCM12      | 12" Bull-Moil Chisels Spline      |
| GLCM12TE    | 12" Bull-Moil Chisels SDSMax      |
| GLCM18      | 18" Bull-Moil Chisels Spline      |
| GLCM18TE    | 18" Bull-Moil Chisels SDSMax      |
| GLCS12      | 12" Scaling Chisels Spline        |
| GLCS12TE    | 12" Scaling Chisels SDSMax        |
| GLCS12TEX3  | Scaling Chisels SDSMax - 3 X 12"  |
| GLCS12X3    | Scaling Chisels Spline - 3 X 12"  |
| GLCS18      | 18" Scaling Chisels Spline        |
| GLCS18TE    | 18" Scaling Chisels SDSMax        |

## Manual Concrete Bullfloat - Smooth finish to the end.

- Easy to use**
- ♦ Manual bullfloat for smoothing out concrete flooring
  - ♦ Magnesium bracket increases durability and reduces weight for better control

### Manual Bullfloat Components

| Model                             | RI35650   | RI35648                              |
|-----------------------------------|---|--------------------------------------|
| <b>Description</b>                | 8' ft. Handle for Richard Bullfloat   | 48" Richard Bullfloat (INCL.BRACKET) |
| <b>Working Dimensions (L x W)</b> | The handle and bullfloat must be purchased to complete a 48" wide Richard Manual Bullfloat. Each component sold separately. |                                      |



## K-Taper Shanks

| Product No. | Dimensions (mm) | Price  |
|-------------|-----------------|--------|
| CK030006    | 13 X 200        | 29.71  |
| CK030206    | 13 X 400        | 60.72  |
| CK030207    | 14 X 400        | 39.27  |
| CK030009    | 16 X 200        | 32.21  |
| CK030209    | 16 X 400        | 63.00  |
| CK030111    | 18 X 250        | 39.00  |
| CK030213    | 19 X 400        | 49.37  |
| CK030114    | 20 X 250        | 44.16  |
| CK030214    | 20 X 400        | 49.37  |
| CK030314    | 20 X 600        | 68.60  |
| CK030115    | 22 X 250        | 49.48  |
| CK030215    | 22 X 400        | 54.48  |
| CK030116    | 24 X 250        | 54.91  |
| CK030117    | 25 X 250        | 58.22  |
| CK030217    | 25 X 400        | 68.65  |
| CK030317    | 25 X 600        | 112.37 |
| CK030119    | 28 X 250        | 65.34  |
| CK030219    | 28 X 400        | 75.93  |
| CK030121    | 32 X 250        | 83.80  |
| CK030221    | 32 X 400        | 146.53 |
| CK030321    | 32 X 600        | 157.40 |
| CK030225    | 38 X 400        | 250.16 |
| CK030227    | 44 X 400        | 347.54 |
| CK030228    | 50 X 400        | 427.17 |



**RI35648**



**RI35650**

### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

[www.uniquip.ca](http://www.uniquip.ca)

### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## StarDiamond WonderBlade - One Blade Does it All

- Simplicity:** ♦ Single multi-application blade design leads to fast and clean cutting for common uses
- Durability** ♦ Patented TCT undercut protection protects steel core from undercutting and extends blade life
- Quality** ♦ High diamond concentration & extra strong bond will satisfy customers & improve your bottom line

### Recommended Equipment:



Masonry Saws



Low HP



High Speed Saw

### WonderBlade: One Blade Does it All



| Product No. | Size                           |
|-------------|--------------------------------|
| SD10304     | 12" x 0.125" x 1" - 20mm - Pin |
| SD10400     | 14" x 0.125" x 1" - 20mm - Pin |
| SD10408     | 16" x 0.125" x 1" - 20mm - Pin |
| SD10404     | 18" x 0.125" x 1"              |

## StarDiamond ZigZag - Built for Speed

- Performance:** ♦ Exclusive laser turbo segment design delivers fast, sharp cutting action
- Strength:** ♦ Exceptional product performance and life due to high grade diamond in cobalt bond
- Designed for Contractors** ♦ Built to cut hard to medium materials common in reinforced concrete, masonry & landscaping applications

### Recommended Equipment:



Masonry Saws



High Speed Saw

### ZigZag: Built for Speed



| Product No. | Size                           |
|-------------|--------------------------------|
| SD11353     | 12" x 0.125" x 1" - 20mm - Pin |
| SD11362     | 14" x 0.125" x 1" - 20mm - Pin |
| SD11364     | 16" x 0.125" x 1" - 20mm - Pin |

## StarDiamond Max - Huge Segments. Maximum Life.

- Value:** ♦ Combines performance and economical design to deliver higher margins
- User-friendly:** ♦ Ability to cut both wet and dry surfaces and common materials increase resale volumes
- Toughness** ♦ 0.500" high diamond segments lead to extended service life

### Recommended Equipment:



Masonry Saws



High Speed Saw

### Max: Huge Segments. Maximum Life



| Product No. | Size                           |
|-------------|--------------------------------|
| SD10212     | 12" x 0.125" x 1" - 20mm - Pin |
| SD10214     | 14" x 0.125" x 1" - 20mm - Pin |

# Special purpose diamond blades

## StarDiamond Gladiator - Absolutely Nothing's Faster

- Speed** ♦ Alternating Zig Zag segments deliver top cutting speeds for increased productivity
- Accuracy** ♦ Patented Cool Core design leads to decreased blade warping and straight cuts
- Professional Strength** ♦ 0.400" high diamond segment leads to extended service life

### Recommended Equipment:



Masonry Saws



High Speed Saw

### Gladiator for Cured Concrete: Absolutely Nothing's Faster



| Product No. | Size                           |
|-------------|--------------------------------|
| SD10380     | 12" x 0.125" x 1" - 20mm - Pin |
| SD10390     | 14" x 0.125" x 1" - 20mm - Pin |

### Gladiator for Asphalt & Block: Absolutely Nothing's Faster



| Product No. | Size                           |
|-------------|--------------------------------|
| SD10393     | 12" x 0.125" x 1" - 20mm - Pin |
| SD10392     | 14" x 0.125" x 1" - 20mm - Pin |

## StarDiamond Junior - Big on Performance

- Economical** ♦ Superlative performance for entry-level price means customer satisfaction for increased return purchases
- Rental-tough** ♦ Create value rental packages with fleet equipment for added customer value
- Quality** ♦ High diamond concentration sets industry standard for cutting performance

### Recommended Equipment:



Masonry Saws



Low HP



High Speed Saw

### Junior for Cured Concrete: Big on Performance



| Product No. | Size                           |
|-------------|--------------------------------|
| SD10361     | 12" x 0.125" x 1" - 20mm - Pin |
| SD10362     | 14" x 0.125" x 1" - 20mm - Pin |

### Junior for Asphalt & Green Concrete: Big on Performance



| Product No. | Size                           |
|-------------|--------------------------------|
| SD24006     | 12" x 0.125" x 1" - 20mm - Pin |
| SD24007     | 14" x 0.125" x 1" - 20mm - Pin |

### RandomCarbide Abrasive: Demolition, Fire, Rescue & Roofing



| Product No. | Size                |
|-------------|---------------------|
| SD80000     | 12" x 0.250" x 1"   |
| SD81000     | 12" x 0.250" x 20mm |
| SD85000     | 14" x 0.250" x 1"   |
| SD86000     | 14" x 0.250" x 20mm |

## StarDiamond RandomCarbide Abrasive - Demolition, Fire, Rescue & Roofing

- Industrial-use** ♦ Embedded carbide chunks cut through materials that stop other blades
- Efficient** ♦ Reverse for fresh leading edges to extend productivity
- Rugged** ♦ Tough design performs on demand

### Recommended Equipment:



High Speed Saw

### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

C11

WWW.uniquip.ca

### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221







# uide to mason frame scaffolding

## Choosing Mason Frames:

### Match the Right Specifications to Your Scaffolding Needs

Mason frames dominate jobsite scaffold usage. Our offerings are sized to fit easily into most conventional and popular mason frame designs. However, we are aware that there are other scaffold systems available and you may have these products in your fleet.

In order to help you choose the correct frames and accessories, below are 2 diagrams with measurements of our mason frames. All of our frames are built to the following specifications in diameter, opening, and spacing. The only differences are those of the actual dimensions of the frame, such as height and width, allowing you to choose the components for your custom needs. Our quality scaffolding accessories are designed to complement mason frames of this popular design.

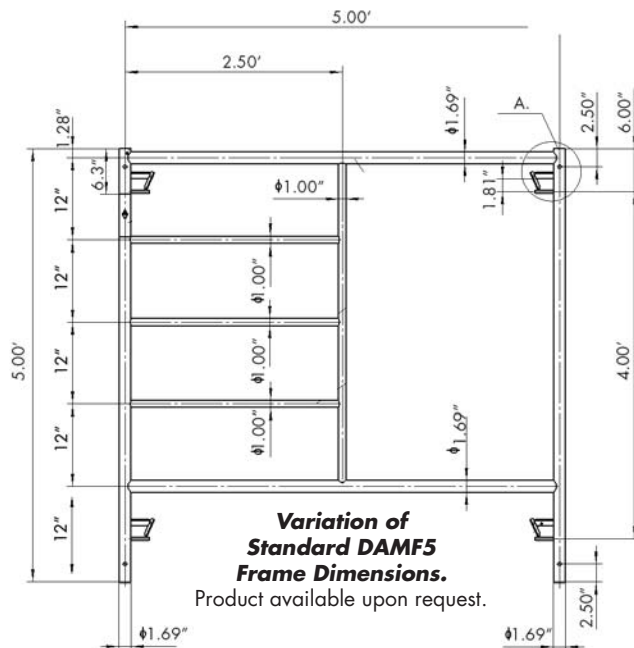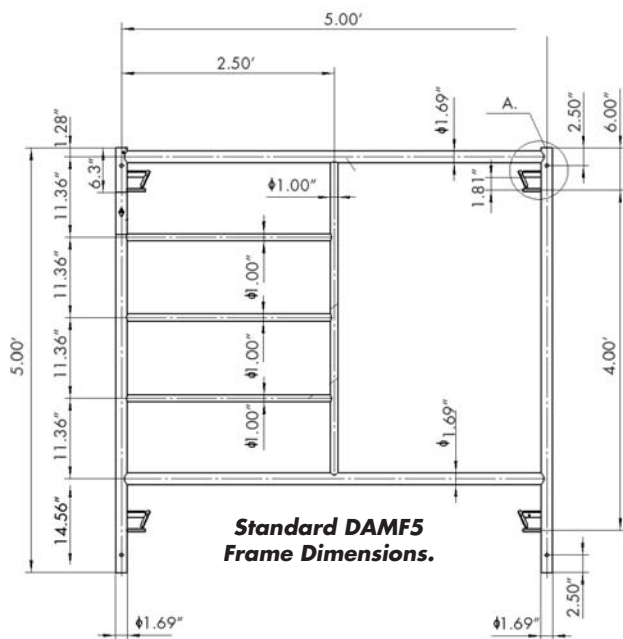

## Choosing Mason Frames:

### Frames vs. Sets: Options to Suit Your Business Plan

Whether you are looking to add single frames or complete sections to your scaffolding selection, Uniquip is there to meet your business needs. We offer 5' x 5' mason frames (DAMF5) in both sets or single frames. Single frames allow you to complete missing sections or simply add extra inventory to your popular stock. Full scaffold sets make it easy to economically build your inventory, ensuring that you always have the right components to deliver safe and complete scaffold solutions to your customers.

Each of our sets include the basic components to complete a scaffold section. Check with Uniquip for special pricing on complete sections!

#### All DAMF5 5' x 5' Mason Frame Sets include the following:



5' x 5' Mason Frames  
(2 frames)



Galvanized Braces  
(2 braces)



7" Galvanized Coupling Pin with 1" Collar  
(4 pins)



Anodized Spring Clips  
(4 clips)

Choose either:

DAMF5P: Powder-coat Frame  
OR  
DAMF5H: Galvanized Frame

Choose either:

DAB74: 7' x 4' Galvanized Braces  
OR  
DAB104: 10' x 4' Galvanized Braces

DACP7-1

DASC

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

D1

www.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

# Setting up a scaffold tower

The height of a mason frame tower can be adjusted by combining different frames, such as the **DAMF30 30" H x 5' W Powder-Coated Frame** shown.



Create a safe working deck with **DAGRP-series Guardrail Posts** and **DAGR-series Galvanized Guard Rails**.



**DASB24 24" Side Brackets** can be added to each scaffold section so that **DAABW Aluminium & Wood Platforms** can be added for walkways for extra workspace.

Increase working space and make secure walkways with **DAABW-series Aluminium & Wood Platforms**.



Add stability on tall towers with **DAFO-30 30" Mason Frame Outriggers** and **DASJ1P24 Screw jacks**.



Use the **DABA12 Galvanized Banana Clip** as a brace to link sections of scaffolding together.



Different **DAB-series Galvanized Braces** provide structure and added strength to scaffolding sections & outrigger frames.



Secure the **DAC8R Mason Frame Caster** with a **DAPTP Pig Tail Pin** to frame for mobility.

D2

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

www.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

# Scaffold essentials

## Mason Frames, Braces & Platforms - Get the Right Basics

### Mason Frames

- ♦ All frames are available in standard powder-coat finish for functionality and value
- ♦ Invest in the hot-dip galvanized DAMF5H 5' x 5' Mason Frames for greater rust and scratch resistance and thus extended working life

### Braces

- ♦ Galvanized braces add strength and structure to scaffold sections
- ♦ Combine braces of different lengths and widths for a customized scaffolding solution







### Platforms

- ♦ Create walkways & expand workspace in & around scaffolds with durable, lightweight aluminium-framed wood platforms



#### Mason Frames

| Model  | Description                                | Net Weight | Shipping Weight | Shipping Ratio       | Available in Galvanized Finish | Available in Sets |
|--|--|------------|-----------------|----------------------|--------------------------------|-------------------|
|  <b>DAMF5P</b>  | 5' W x 5' H<br>Powder-coated Mason Frame   | 39.84 lbs  | 1000 lbs        | 6 frames =<br>1 skid | Yes:<br>DAMF5H                 | Yes               |
|  <b>DAMF30P</b> | 5' W x 30' H<br>Powder-coated Mason Frame  | 26.62 lbs  | 500 lbs         | 6 frames =<br>1 skid | Yes:<br>DAMF30H                | Yes               |
|  <b>DANF5P</b>  | 30' W x 5' H<br>Powder-coated Narrow Frame | 24.97 lbs  | 500 lbs         | 6 frames =<br>1 skid | Yes:<br>DANF5H                 | Yes               |

#### Galvanized Braces

| Model  | Description                     | For Use With                              | Net Weight | Shipping Weight (per standard bundle) | Shipping Ratio        |
|--|---------------------------------|---|------------|---------------------------------------|-----------------------|
|  <b>DAB74</b>     | 7' X 4'<br>Galvanized Brace     | DAMF5 & DANF5<br>Mason Frames             | 12.5 lbs   | 75 lbs                                | 6 brace =<br>1 bundle |
|  <b>DAB104</b>    | 10' X 4'<br>Galvanized Brace    | DAMF5 & DANF5<br>Mason Frames             | 16.5 lbs   | 99 lbs                                | 6 brace =<br>1 bundle |
|  <b>DAB719.5</b>  | 7' X 19.5"<br>Galvanized Brace  | DAMF30P<br>Mason Frames                   | 10.5 lbs   | 63 lbs                                | 6 brace =<br>1 bundle |
|  <b>DAB1019.5</b> | 10' X 19.5"<br>Galvanized Brace | DAMF30P<br>Mason Frames                   | 16.0 lbs   | 80 lbs                                | 6 brace =<br>1 bundle |
|  <b>DAB72</b>     | 7' X 2'<br>Galvanized Brace     | DAFO-30 30" Outrigger<br>for Mason Frames | 11.25 lbs  | 67.5 lbs                              | 6 brace =<br>1 bundle |
|  <b>DAB102</b>    | 10' X 2'<br>Galvanized Brace    | DAFO-30 30" Outrigger<br>for Mason Frames | 16.25 lbs  | 97.5 lbs                              | 6 brace =<br>1 bundle |

#### Aluminium & Wood Platforms

| Model  | Description                                     | Net Weight | Shipping Weight |
|--|---|------------|-----------------|
|  <b>DAABW10</b> | 10' L x 19" W<br>Aluminium Framed Wood Platform | 25.6 lbs   | 50 lbs          |
|  <b>DAABW7</b>  | 7' L x 19" W<br>Aluminium Framed Wood Platform  | 23.6 lbs   | 50 lbs          |

# Stability accessories, pins & clips, & guardrails



## Stability Accessories, Pins & Clips, & Guardrails - Expand the possibilities safely & securely

### Stability Accessories

- ♦ Add mobility with DAC8R 8" Casters and stability with DABP1 Base Plate & DAFO-30 Outrigger
- ♦ For building tall towers or to add walkways and workspaces, the DAFO-30 30" Outrigger and the DASB20-S 20" or DASB24-S 24" Side Brackets add rigidity and support to large projects





### Pins & Clips

- ♦ Secure & connect scaffold sections together with DACP7-1 Coupling Pin & your choice of clips & pins
- ♦ Get extra support with DABA12 Banana Clips when adding sections or other components to scaffold







### Guard Rails

- ♦ Work safely at the top of scaffold towers with guard rails and posts




#### Stability Accessories

| Model  | Description  | Net Weight | Shipping Weight |
|--|--|------------|-----------------|
| <b>DAC8R</b><br>                        | 8" Caster  | 13.5 lbs   | 14 lbs          |
| <b>DABP1</b><br>                        | Powder-coated Base Plate   | 3 lbs      | 3 lbs           |
| <b>DAFO-30</b><br>                      | 30" Powder-coated Outrigger<br>(47" H x 30" W)   | 20 lbs     | 20 lbs          |
| <b>DASB20-S</b><br><b>DASB24-S</b><br> | 20" Powder-coated Side Bracket<br>(22" H x 20" W)<br>24" Powder-coated Side Bracket<br>(22" H x 24" W) | 12 lbs     | 12 lbs          |

#### Pins & Clips

| Model   | Description                               | Use with   | Net Weight | Shipping Weight |
|---|---|--|------------|-----------------|
| <b>DACP7-1</b><br> | 7" Galvanised Coupling Pin with 1" Collar | DASC Spring Pin, DAGP Gravity Pin or DAPTP Pig Tail Pin                                  | 1.25 lbs   | 1.25 lbs        |
| <b>DABA12</b><br>  | 12" Galvanized Banana Clip                | DASC Spring Pin, DAGP Gravity Pin or DAPTP Pig Tail Pin                                  | 3 lbs      | 3 lbs           |
| <b>DABA12P</b><br> | 12" Powder-coated Banana Clip             | DASC Spring Pin, DAGP Gravity Pin or DAPTP Pig Tail Pin                                  | 5 lbs      | 5 lbs           |
| <b>DAGP</b><br>    | Galvanized Gravity Pin                    | DACP7-1 Coupling Pin, DABA12 Galvanized Banana Clip or DABA12P Powder-coated Banana Clip | 0.125 lbs  | 1 lbs           |
| <b>DASC</b><br>    | Galvanized Spring Pin                     | DACP7-1 Coupling Pin, DABA12 Galvanized Banana Clip or DABA12P Powder-coated Banana Clip | 0.5 lbs    | 1 lbs           |
| <b>DAPTP</b><br>   | Galvanized Pig Tail Pin                   | DACP7-1 Coupling Pin, DABA12 Galvanized Banana Clip or DABA12P Powder-coated Banana Clip | 0.125 lbs  | 1 lbs           |

#### Guard Rails and Guard Rail Posts

| Model  | Description                   | Net Weight | Shipping Weight |
|--|-------------------------------|------------|-----------------|
| <b>DAGR</b>  | Powder-coated Guard Rail Post | 8 lbs      | 8 lbs           |
| <b>DAGR10</b><br> | 10' Galvanized Guardrail      | 16 lbs     | 16 lbs          |
| <b>DAGR7</b><br>  | 7' Galvanized Guardrail       | 5 lbs      | 5 lbs           |
| <b>DAGR5</b><br>  | 5' Galvanized Guardrail       | 4 lbs      | 4 lbs           |

# Screw jacks & post shores

## Screw Jacks & Post Shores: Rise up to the Next Level


For construction sites, the ability to customize scaffolding and provide dependable temporary support to structures are both crucial to the success of the project as a whole. Because most scaffold systems are composed of factory-standard components, they may not combine to the exact size specifications required for particular jobs.

The DASJ-series of anodized screw jacks fit into most mason frames (see page 35 for our specifications). Screw Jacks with base plates are available in 24" or 36" heights to level scaffolds on uneven surfaces and adjust tower height. To expand the height between each scaffold section, use the DASJ1S24 Socket Screw Jack.

Whether it is excavating underground or adding new storeys to existing buildings, always provide structural support with our anodized DAPS-series of Adjustable Post Shores. Slide and set the inner tube to the approximate desired height (each adjustment hole is set 140 mm (5.5" apart)). Then, fine-tune the post shore to the required height by turning the cast steel collar with its hinged handle until the collar has raised the inner tube to the required height. Let us provide safe and effective solutions for temporary worksite support.

### Anodized Screw Jacks - For light to medium support

- Adjustable**
  - ♦ Adjust to either 24" (DASJ1P24 & DASJ1S24) or 36" (DASJ1P36) depending on jobsite requirements
- Balance**
  - ♦ Available with or without base plates to suit application needs
  - ♦ For leveling scaffolds on uneven terrain or for extra lift choose either the DASJ1P24 or the DASJ1P36 for 24" or 36" adjustment height
  - ♦ For adjusting height in between scaffold sections or to add both height and mobility, the 24" Screw Jack with Socket (DASJ1S24) will connect to frames and casters with coupling pins and securing pins.
- Efficient**
  - ♦ Allows for fine-tuning scaffold to exact height specifications
  - ♦ Add height without the extra weight or cost considerations of additional frames

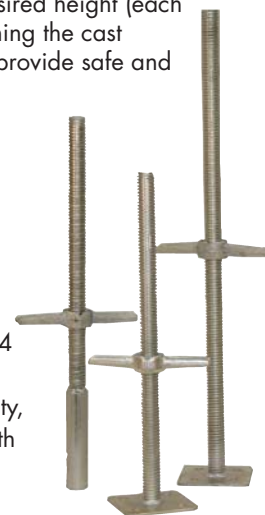

| Model                  | DASJ1P36                       | DASJ1P24                       | DASJ1S24                   |
|------------------------|--------------------------------|--------------------------------|----------------------------|
| <b>Description</b>     | 36" Screw Jack with Base Plate | 24" Screw Jack with Base Plate | 24" Screw Jack with Socket |
| <b>Net Weight</b>      | 15 lbs                         | 12 lbs                         | 12 lbs                     |
| <b>Shipping Weight</b> | 17 lbs                         | 14 lbs                         | 14 lbs                     |

### Anodized Post Shores - Heavy-duty Temporary Supports

- Versatile:**
  - ♦ Available in 5 different sizes to provide height adjustments from 3' 1" to 16' 3" & weight supports
  - ♦ Dual adjustment system allows for simple & precise calibration to suit project demands
- Low-maintenance:**
  - ♦ Handle features self-cleaning nut to clear off debris and dirt for easy adjustment and maintenance
  - ♦ Anodized for extra durability from rust and scratch resistance
- Support:**
  - ♦ Give temporary support and structure to existing buildings or newly excavated areas
  - ♦ Head & base plates include four 8mm nail holes each for securing to structures



| Model                  | DAPS-0                            | DAPS-1                            | DAPS-2                            | DAPS-3                               | DAPS-4                                |
|------------------------|-----------------------------------|-----------------------------------|-----------------------------------|--------------------------------------|---------------------------------------|
| <b>Description</b>     | 3' 1" to 6' Galvanized Post Shore | 5' 6" - 10' Galvanized Post Shore | 6' 9" - 11' Galvanized Post Shore | 8' 9" - 13' 2" Galvanized Post Shore | 11' 6" - 16' 3" Galvanized Post Shore |
| <b>Min. Height</b>     | 3' 1"                             | 5' 6"                             | 6' 9"                             | 8' 9"                                | 11' 6"                                |
| <b>Max. Height</b>     | 6'                                | 10'                               | 11'                               | 13' 2"                               | 16' 3"                                |
| <b>Net Weight</b>      | 25.6 lbs                          | 40.7 lbs                          | 43.0 lbs                          | 45.0 lbs                             | 50.5 lbs                              |
| <b>Shipping Weight</b> | 27.0 lbs                          | 41.0 lbs                          | 43.5 lbs                          | 46.0 lbs                             | 51.0 lbs                              |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

D5

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221



## Aluminium Baker Scaffold Kit - Lightweight Mobility

### Ready to Use

- ♦ Easy to use baker scaffold kit comes complete with frames, platform and casters for basic indoor contractor use
- ♦ Assembles & disassembles in minutes for easy setup & transportation
- ♦ Add extra accessories to added stability or to create mobile work stations

### Strong

- ♦ Aluminium construction for strength and rust-resistance
- ♦ Strong welded joints with safety latches for added security

### User-friendly

- ♦ Adjustable height for the platform placement to operator needs
- ♦ Versatile size combined with mobility to suit buildings and other constrained spaces



**DAB100AL**

| Model                           | DAB100AL                     |
|---------------------------------|------------------------------|
| Description                     | Aluminium Baker Scaffold Kit |
| Working Dimensions (L x W x H)  | 72" x 29" x 72"              |
| Shipping Dimensions (L x W x H) | 72" x 29" x 5"               |
| Shipping Weight                 | 100 lbs                      |



For stability in small spaces, choose the **DABAL-NO Narrow Outrigger**.

DAB100AL shown with optional add-ons:  
**DABAL-WO Outrigger**, extra **DAC5R Casters** & **DABAL-GRF Guardrail Frame Set**.







Create safe and accessible workspace with **DABAL-GRF Guardrail Set**.



Sturdy spring locks click together for quick assembly.

### Accessories for DAB100AL

| Model           | DAC5R   | DABAL-NO  | DABAL-WO   | DABAL-GRF   |
|-----------------|---|---|--|---|
|                 |  |  |  |  |
| Description     | 5" Caster   | 24" H x 18.5" W<br>Narrow Aluminium Outrigger                                       | 39.5" H x 32" W<br>Wide Aluminium Outrigger  | Guardrail Frame Set<br>(69" L x 26" W x 45" H)  |
| Net Weight      | 7 lbs   | 4 lbs   | 8 lbs  | 25 lbs  |
| Shipping Weight | 7 lbs   | 4 lbs   | 8 lbs  | 25 lbs  |

# a ngle steel baker scaffold

Attach the optional  
**DAB-WO Powder-coated Outrigger**  
for added stability and  
balance on the jobsite.



DAB100 shown with optional add-ons:  
**DAB-WO Outrigger** and extra **DAC6R 6" Casters**.

## Powder-coated Angle Steel Baker - Strength and Mobility

### Jobsite-tough

- ♦ Kit comes ready to assemble with platform, frames & casters
- ♦ Angle steel construction gives rugged durability and weight ideal for outdoor applications
- ♦ Powder-coated steel & wood platform offer traction and wider workspace for painting, masonry, or any other contractor work

### Durable

- ♦ Standard 6" casters provide extra stability and support
- ♦ Powder-coat finish for added rust & scratch resistance

### Cost-effective



- ♦ Economical and versatile choice for complete contractor-use temporary mobile work stations
- ♦ Disassembles into flat pieces for easy transportation from site to site



**DAB100**

| Model                           | DAB100                          |
|---------------------------------|---------------------------------|
| Description                     | Powder-coated Angle Steel Baker |
| Working Dimensions (L x W x H)  | 72" x 30" x 78"                 |
| Shipping Dimensions (L x W x H) | 78" x 30" x 5"                  |
| Shipping Weight                 | 160 lbs                         |

### Accessories for DAB100

| Model           | DAC6R  | DAB-WO  |
|-----------------|--|---|
|                 |  |  |
| Description     | 6" Caster  | Powder-coated Outrigger<br>(44" H x 45.5" W)  |
| Net Weight      | 8 lbs  | 45 lbs  |
| Shipping Weight | 8 lbs  | 45 lbs  |

### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

D7

WWW.uniquip.ca

### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221



## Modular scaffold stability system

### **Quik-Scaff Modular Scaffold Wagon -** *Mobility and Stability Anywhere!*

#### **Versatile**

- ♦ Use with any 5' ft. wide mason frame scaffold
- ♦ Y-shaped wagon handle attaches to wagon easily and provides increased maneuverability
- ♦ Complete kit includes removable wagon handle, 4 support legs with skates, and 2 sets of wheels and axles for simple set-up and positioning

#### **Ingenious**

- ♦ Easy to set-up and deploy even on awkward terrain and tight spaces
- ♦ Multi-purpose design functions as both stabiliser and scaffold wagon
- ♦ Built-in spirit level to ensure balance and safe installation
- ♦ Locking collar offers 5 different locking angles to adjust wheel direction
- ♦ Self-leveling without need for screwjacks or other extra accessories

#### **Rugged**

- ♦ Powder-coated for extra durability on jobsites
- ♦ Tough steel components for contractor-use
- ♦ Large flat beveled skates for increased stability and ease of positioning
- ♦ Pneumatic tires move scaffolding structure easily and smoothly over uneven ground

| Model                   | QSWAGON7-10                            |
|-------------------------|--|
| Description             | Quik-Scaff Self-leveling Modular Wagon |
| Leveling Height         | up to 30" in.                          |
| Tires                   | 14" pneumatic tires                    |
| Skate Surface Dimension | 5.5" x 18"                             |
| Scaffold type Supported | 5' ft. wide mason frames               |
| Shipping Weight         | 200 lbs                                |

### **QSWAGON7-10**



Rotate skate and locks in 5 different position to adjust for jobsite requirements.



Built-in spirit level allows faster set-up and adjustment.



Leg drops down to 30" to level scaffold over various different heights.



Quik-Scaff Wagon moves with you on the job!  
Just add standard crossbraces to form wagon!  
No need to carry extra parts!

D8

**English Assistance**

(T) 1.888.332.4012 (F) 1.866.567.0956

[www.uniquip.ca](http://www.uniquip.ca)

**French Assistance**

(T) 1.800.332.4012 (F) 1.866.825.2221



## **Quik-Scaff Scaffold Support Systems\* -** *Support where you need it.*

- QSLADDER:**
- ♦ Use with any 5' X 5' mason frame
  - ♦ Acts as an access ladder when scaffold tower is raised off of the ground
  - ♦ Recommended accessory for use with QSWAGON7-10
- QSLEG:**
- ♦ Self-levelling scaffold support system balances scaffold structures for on uneven terrain
  - ♦ Solid steel posts provide up to 30" adjustment
  - ♦ Large beveled skates distributes weight of scaffold structure to provide solid footing & easy repositioning of scaffold
  - ♦ Complete kit includes 4 support legs with skates to support scaffolds of any dimension
- QSSKATE:**
- ♦ Beveled skate edges for increased maneuverability and easy positioning
  - ♦ Large flat surface for improved weight distribution and stability
  - ♦ Easy to set up and dismantle on jobsites
  - ♦ Complete kit includes 4 skates and carrying bag
  - ♦ Rubberized canvas carrying bag (QSBAG) included for easy transportation and storage

\*Designed to fit most scaffold designs. For accurate verification of fit, consult page D1 of the Uniquip Catalogue for further details.

### **Accessories for Quik-Scaff Modular Scaffold Stability System**

| <b>Model</b>    | <b>Description</b>                | <b>Net Weight</b> | <b>Shipping Weight</b> |
|-----------------|-----------------------------------|-------------------|------------------------|
| <b>QSLEG-S</b>  | Set of 4 Support Legs with Skates | 75 lbs            | 75 lbs                 |
| <b>QSSKATE</b>  | Set of 4 Skates with Carrying Bag | 25 lbs            | 25 lbs                 |
| <b>QSLADDER</b> | Work Ladder                       | 20 lbs            | 20 lbs                 |



\*Carry bag included

### **QSSKATE**



### **QSLADDER**



### **QSLEG-S**



## Rubi Professional DW-Series Electric Tile Saw - For quality and performance

### Feature-packed

- ♦ Motor mounted on fold-away sliding bearings with wall chaser effect lets you make mitred cuts of any angle
- ♦ Make repetitive cuts accurately with steel guide
- ♦ Adjustable square lets you cut straight and evenly

### Low-maintenance

- ♦ 1.5 hp direct drive motor delivers power efficiently to cut through tough materials
- ♦ Low-maintenance and simple design combine for long service life
- ♦ Thermic security switch protects motor from burnouts and premature wear
- ♦ Water pump with variable flow control valve cools blade to prevent blade and materials damage

### Ready to work

- ♦ Quality tile blade and screw-on stand included to get you started out of the box

### RUDW200LPS

### RUDW250LPS



Thermal protected motor glides efficiently along sliding bearings



Folding head for mitring at any angle



Protective steel guide adjusts to the size of any tile



| Model                                  | RUDW200LPS                              | RUDW250LPS                               |
|--|---|--|
| <b>Description</b>                     | Rubi DW-LPS Series 8" Electric Tile Saw | Rubi DW-LPS Series 10" Electric Tile Saw |
| <b>Motor</b>                           | 1.5hp, 120v, 60 Hz, Single-phase        | 1.5hp, 120v, 60 Hz, Single-phase         |
| <b>RPM</b>                             | 2875                                    | 2875                                     |
| <b>Cutting Area (L x W)</b>            | 22" in. x 14" in                        | 25" in. x 16" in.                        |
| <b>Mitring Width</b>                   | 28" in.                                 | 31" in.                                  |
| <b>Blade Size</b>                      | 8" in.                                  | 10" in.                                  |
| <b>Working Dimensions (L x W x H)</b>  | 41" x 17" x 45"                         | 41" x 17" x 47"                          |
| <b>Working Weight</b>                  | 84 lbs                                  | 88.2 lbs                                 |
| <b>Shipping Dimensions (L x W x H)</b> | 41" x 17" x 17"                         | 41" x 17" x 19"                          |
| <b>Shipping Weight</b>                 | 85 lbs                                  | 90 lbs                                   |

# Professional electric tile saws

## Rubi Professional DS-Series Electric Tile Saw - Practical Luxury

### Feature-packed

- ♦ Motor mounted on fold-away sliding bearings with wall chaser effect lets you make mitred cuts of any angle
- ♦ Create adjustable plunge cuts easily and safely
- ♦ Make repetitive cuts accurately with steel guide
- ♦ Vertically mobile head, reinforced guides, and adjustable stop plate for repetitive cuts combine for improved control,

### Low-maintenance

- ♦ 1.5 hp direct drive motor delivers power efficiently to cut through tough materials
- ♦ Low-maintenance and simple design combine for long service life
- ♦ Thermic security switch protects motor from burnouts and premature wear
- ♦ Water pump with variable flow control valve cools blade to prevent blade and materials damage

### Ready to work

- ♦ Quality tile blade and screw-on stand included to get you started out of the box

### RUDS250EP



Foldable head glides along stainless steel tracks for smooth mitring action.



Adjustable plunge cut.



Stop for repetitive cuts.

| EModel                          | RUDS250EP                            |
|---------------------------------|--------------------------------------|
| Description                     | Rubi DS Series 10" Electric Tile Saw |
| Motor                           | 1.5hp, 120v, 60 Hz, Single-phase     |
| RPM                             | 2875                                 |
| Cutting Area (L x W)            | 21" in. x 26" in                     |
| Mitring Width                   | 28" in.                              |
| Blade Size                      | 10" in.                              |
| Working Dimensions (L x W x H)  | 43" x 21" x 55.125"                  |
| Working Weight                  | 148 lbs                              |
| Shipping Dimensions (L x W x H) | 45" x 23" x 5"                       |
| Shipping Weight                 | 166 lbs                              |

#### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

E2

WWW.uniquip.ca

#### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## Rubi DT-Series 10" Electric Paving Brick and Tile Saw - For tough and strong materials.

- Compact:**
- ♦ Compact design sets up easily and quickly wherever you are
  - ♦ Create a portable saw table with optional Support Table (RU50935)
- Safe:**
- ♦ Thermic and overload security switches prevents unit burnout and ensures worker safety
  - ♦ Water pump with flow control valve keeps blade clean and cool for longer blade life
- Performance:**
- ♦ Vertically mobile head with wall chaser effect and fold-away for mitre cuts on ceramic tiles, as well as a variety of building materials such as brick, and other tough materials



### RUDT250

#### Support Table for RUDT250 Table Saw



|                                       |                 |
|---------------------------------------|-----------------|
| <b>Model</b>                          | <b>RU50935</b>  |
| <b>Working Dimensions (L x W x H)</b> | 26" x 20" x 28" |
| <b>Shipping Weight</b>                | 15 lbs          |

|                                       |   |
|---------------------------------------|---|
| <b>Model</b>                          | <b>RUDT250</b>                                      |
| <b>Description</b>                    | Rubi DT Series 10" Electric Paving Brick & Tile Saw |
| <b>Motor</b>                          | 0.5hp, 120v, 60 Hz, Single-phase                    |
| <b>RPM</b>                            | 2800  |
| <b>Total Working Area (L x W)</b>     | 17" in. x 15" in                                    |
| <b>Mitring Area (L x W)</b>           | 21" in. x 15" in.                                   |
| <b>Blade Size</b>                     | 10" in.   |
| <b>Working Dimensions (L x W x H)</b> | 33" x 21" x 24"                                     |
| <b>Working Weight</b>                 | 119 lbs   |
| <b>Shipping Weight</b>                | 152 lbs   |

#### Diamond Blades for Rubi Tile Saws



|                    |  |
|--------------------|--|
| <b>Product No.</b> | <b>Description</b>                     |
| RU30945            | 7" Continuous Blade for Granite/Marble |
| RU30946            | 8" Continuous Blade for Granite/Marble |
| SD11256            | 10" Multi-Purpose Cutting Blade        |



### RUND180

### RUND200

## Rubi ND-Series Portable Electric Tile Saws Portable Cutting Power

|                                       |   |   |
|---------------------------------------|---|---|
| <b>Model</b>                          | <b>RUND180</b>                            | <b>RUND200</b>                            |
| <b>Description</b>                    | Rubi ND Series 7" Electric Tile Table Saw | Rubi ND Series 8" Electric Tile Table Saw |
| <b>Motor</b>                          | 0.5hp, 120v, 60 Hz, Single-phase          | 2.0hp, 120v, 60 Hz, Single-phase          |
| <b>RPM</b>                            | 2700                                      | 2700                                      |
| <b>Total Working Area (L x W)</b>     | 19" in. x 15.75" in                       | 21-3/8" in. x 24" in.                     |
| <b>Mitring Area (L x W)</b>           | 8" in. x 15.75" in.                       | 20" in. x 24" in.                         |
| <b>Blade Size</b>                     | 7" in.                                    | 8" in.                                    |
| <b>Working Dimensions (L x W x H)</b> | 19" x 17" x 9-1/16"                       | 27" in. x 24" in. x 10" in                |
| <b>Working Weight</b>                 | 30.6 lbs                                  | 67.2 lbs                                  |
| <b>Shipping Weight</b>                | 31 lbs                                    | 68 lbs                                    |

- Control:**
- ♦ Make clean cuts through brittle materials like glass, tiles, and marble
- Value:**
- ♦ Convenient self-contained design lets you mitre with the tilt-up table & make repetitive cuts with guide
- Tough:**
- ♦ Stainless-steel work table and direct-drive delivers contractor-tough durability
  - ♦ Thermic and overload security switches prevent unit burnouts



## Rubi Professional TR-series Tile Cutters - For the complete tile cutting solution

### Fully-loaded


- ♦ High performance adjustable breaking system
- ♦ Deluxe tile cutter includes lateral stop for precise straight and 45° cuts, and other tools for shaping tiles to any any angle all packaged in anti-shock carrying case

### Professional Results

- ♦ One-piece swivel angle plate with central pivot and angular measuring system lets you easily make repetitive cuts from 0° to 45°
- ♦ Moveable separator and 6 mm and 10 mm scoring wheels included to get the project started

### Contractor-tough

- ♦ Two-layer base for added shock absorption protects tile cutter from rugged contractor use
- ♦ Chromed and rectified steel guides with anti-corrosion treatment extends working life
- ♦ Available in both 17" in. and 24" in. models to cut tiles for projects of any size

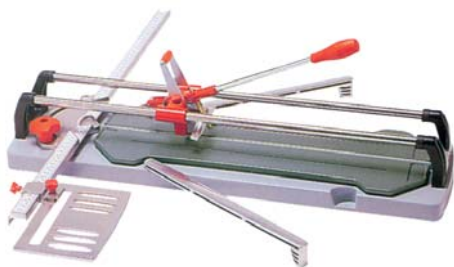

**RUTR400S**

**RUTR600S**

| Model                    | RUTR400S  | RUTR600S  |
|--------------------------|---|---|
| Description              | Rubi Heavy-duty Professional TR-S Series 17" Manual Tile Cutter | Rubi Heavy-duty Professional TR-S Series 24" Manual Tile Cutter |
| Max. Cutting Length      | 17" in.   | 24" in.   |
| Cutting Strength         | 1 323 lbs   | 1 323 lbs   |
| Recommended Tile Size    | 12" in. x 12" in.   | 17" in. x 17" in.   |
| Max. Separating Capacity | 5/8" in.  | 5/8" in.  |
| Working Weight           | 21 lbs  | 27 lbs  |
| Shipping Weight          | 23 lbs  | 30 lbs  |

## Rubi Classic TS-Plus Tile Cutters - Basic. Simple. Dependable.

### Performance

- ♦ Portable tile cutter works where you need to work
- ♦ High performance single-point breaker for clean cutting
- ♦ New design with added breaking force

### Simple

- ♦ Ergonomically designed for user comfort and direct vision of the scoring and cutting line
- ♦ Supplied with 6 mm and 10 mm scoring wheels to cut most masonry materials

### Versatile

- ♦ Lateral stop for precise straight and 45° cuts
- ♦ Choose from 17" in. or 26" in. model to cut tiles for most common projects



**RUTS40PLUS**

**RUTS60PLUS**

| Model                    | RUTS40PLUS  | RUTS60PLUS  |
|--------------------------|---|---|
| Description              | Rubi Professional TS-Plus Series 17" Manual Tile Cutter | Rubi Professional TS-Plus Series 26" Manual Tile Cutter |
| Max. Cutting Length      | 17" in.   | 26" in.   |
| Cutting Strength         | 882 lbs   | 882 lbs   |
| Recommended Tile Size    | 10" in. x 10" in.                                       | 18" in. x 18" in.                                       |
| Max. Separating Capacity | 5/8" in.  | 5/8" in.  |
| Working Weight           | 13 lbs  | 26 lbs  |
| Shipping Weight          | 15 lbs  | 29 lbs  |

| Replacement Scoring Wheels for Rubi Tile Cutters |   |   |
|--|---|---|
| Product No.                                      | Description   |   |
| RU01945  |  | 6mm Scoring Wheel for Standard Tiles                                  |
| RU01958  |  | 8mm Scoring Wheel for Standard Tiles & Stoneware                      |
| RU01946  |  | 10mm Scoring Wheel for Stoneware                                      |
| RU01950  |  | 18mm Scoring Wheel for Granulated & Other Difficult-Cutting Stoneware |

## Rubi Manual Concrete Block Cutter - Clean and easy breaks

- Be Free** ♦ Cut through concrete and other masonry bricks anywhere without using electricity
- Sturdy** ♦ Sturdy construction and perfect balance deliver 9039 lbs of cutting force for precise breaks  
♦ Low-maintenance and simple design combine for long service life
- Easy to Use** ♦ Quick and easy to use straight out of the box



**RUB14**

| Model                | RUB14                                 |
|----------------------|---------------------------------------|
| Description          | Rubi 16" Manual Concrete Block Cutter |
| Cutting Area (L x W) | 16" in. x 5" in                       |
| Cutting Strength     | 9 039 lbs                             |
| Working Weight       | 126 lbs                               |
| Shipping Weight      | 126 lbs                               |

## Crain Heavy-duty Undercutting Saws - Cut to the chase.

- Powerful** ♦ Choose from two powerful undercutting saws to suit your needs  
♦ The 13 amp CR812 Super Saw is the industry leader in power undercutting saws, combining both power and precision
- Ready to work** ♦ CR812 Super Saw kit comes complete with a carbide blade, & a masonry blade all packaged in a durable handheld case  
♦ Attach vacuum to fitting on CR812 for easy clean-up of fine dust and particles  
♦ For economy and essential performance, the 8 amp CR820 Heavy-duty Undercutting saw is available to complement the feature-packed CR812
- Adjustable** ♦ Doors as thick as 1.75" can be undercut by the CR812 without removal  
♦ Create cuts from flush cut up to 1.25" off the floor with adjustable blade height  
♦ Undercut inside corners, doors and through masonry, tile and stone



**CR812**



**CR820**

| Model           | CR812                  | CR820                     |
|-----------------|------------------------|---------------------------|
| Description     | Crain Super Saw        | Crain Heavy-duty Door Saw |
| Motor           | 110v, 13A Single-phase | 110v, 8A Single-phase     |
| RPM No Load     | 5000                   | 8000                      |
| Shipping Weight | 20 lbs                 | 30 lbs                    |

### Blades for Crain Cutting Saws

| Product No. | Description  |
|-------------|--|
| CR822       | 6.5" in Multi-purpose Diamond Blade                    |
| CR821       | 6.5" in Carbide Blade for Undercutting Rough Materials |
| CR805       | 6.5" in Masonry Blade                                  |

# Power floor scraper & vinyl roller

## Samurai Power Floor Scraper - Scrape anything

- Versatile**
- ♦ Scrape and strip vinyl, rubber, asphalt tiles, linoleum, carpet, parquet and other hard to remove, glued on materials from floors cleanly and effectively without damaging the base surface
  - ♦ Work on stairs and other small areas easily by removing handle

- Industrial-strength**
- ♦ Heavy-duty industrial design extends service life
  - ♦ Quiet eccentric drive improves user comfort and lowers vibration

- Low Maintenance**
- ♦ Change blades quickly and efficiently for clean & precise cutting

| Model  | EDDY                                 |
|--|--------------------------------------|
| Description                                  | Samurai Power Floor Scraper/Stripper |
| Motor  | 0.75 hp, 110v, 5A Single-Phase       |
| RPM No Load                                  | 5800                                 |
| Scraping Width                               | 5" in. to 9" in.                     |
| Working Weight (Without Handle)              | 25 lbs                               |
| Working Dimensions (L x W x H) (With Handle) | 23" in. x 12" in. x 20" in.          |
| Working Weight (With Handle)                 | 32 lbs                               |
| Shipping Weight                              | 35 lbs                               |

**SAMURAI**



## Crain Professional Vinyl Roller - Just keep rolling

- Portable**
- ♦ New design features a rolling travel case that protects roller when moving around different work areas or in storage

- Smooth**
- ♦ Roller section floats independently on the axle to glide over any subfloor irregularities
  - ♦ Smooth zinc-plated finish and rounded corners on roller protect flooring material against cutting or marking

- Jobsite-tough**
- ♦ Well-balanced 100 lb solid steel roller performs to professional demands
  - ♦ Low-maintenance, hassle-free design for long service life

### Blades for Eddy Power Floor Scraper

| Product No. | Description                    |
|-------------|--------------------------------|
| ED13        | 9" in. Scraper Blade (10/pack) |
| ED14        | 5.5" Scraper Blade (10/pack)   |
| ED31        | 5.5" x 4" in. Blade (3/pack)   |
| ED15L       | Left Side Blade (1/pack)       |
| ED15R       | Right Side Blade (1/pack)      |



New handy travelling case included!

| Model                      | CR076   |
|----------------------------|---|
| Description                | Crain 100 lb Deluxe Vinyl Roller with Travel Case |
| Diameter                   | 5.5" in.  |
| Working Dimensions (W x H) | 16" x 38"   |
| Working Weight             | 100 lbs   |
| Travel Case Weight         | 8 lbs   |
| Shipping Weight            | 108 lbs   |

**CR076**

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

E6

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221



## ORSB2002

### Orbital Sanders - For flooring perfection

- Practical**
  - ♦ Sand your floors quickly and efficiently with one of the largest sanding surfaces available today
  - ♦ Available with a vacuuming option (ORSB2002V) for easy clean-up
  - ♦ Easy to set-up and use by everyone from homeowners to professional contractors
- Precise**
  - ♦ 12" x 18" rectangular sanding pad allows easy access into corners for complete sanding
  - ♦ Lightweight and well-balanced for easy maneuvering on any surface
- Multi-functional**
  - ♦ Strip, sand, scrub and buff floors with the same machine simply by changing the working surface material
  - ♦ Choose from our quality selection of pads and sandpapers to create a customized solution to your flooring needs



## ORSB2002V

| Model                        | ORSB2002            | ORSB2002V                       |
|------------------------------|---------------------|---------------------------------|
| Description                  | 1 hp Orbital Sander | 1 hp Orbital Sander with Vacuum |
| Motor                        | 1.0 hp, 115v, 6.5A  | 1.0 hp, 115v, 6.5A              |
| RPM                          | 3450                | 3450                            |
| Sanding Surface Area (L x W) | 12" x 18"           | 12" x 18"                       |
| Weight                       | 99 lbs              | 123 lbs                         |
| Removable Weights            | N/A                 | 2 x 19 lbs                      |
| Working Weight               | 99 lbs              | 116 lbs                         |
| Shipping Weight              | 100 lbs             | 118 lbs                         |

#### Orbital Sander Maintenance Pads

| Product No. | Description                             | Qty/pkg |
|-------------|---|---------|
| CB1218BLACK | 12" x 18" Black Stripping Pad           | 5       |
| CB1218GREEN | 12" x 18" Green Scrubbing Pad           | 5       |
| CB1218WHITE | 12" x 18" White Sanding & Polishing Pad | 5       |

#### Double Sided Sandpaper for Orbital Sander

| Product No. | Grit | Qty/pkg |
|-------------|------|---------|
| CB1218016DS | 16   | 25      |
| CB1218020DS | 20   | 25      |
| CB1218024DS | 24   | 25      |
| CB1218036DS | 36   | 25      |
| CB1218040DS | 40   | 25      |
| CB1218050DS | 50   | 25      |
| CB1218060DS | 60   | 25      |
| CB1218080DS | 80   | 25      |
| CB1218100DS | 100  | 25      |
| CB1218120DS | 120  | 25      |

#### Screen Sheets for Orbital Sander

| Product No.     | Grit | Qty/pkg |
|-----------------|------|---------|
| CB1218060SCREEN | 60   | 10      |
| CB1218080SCREEN | 80   | 10      |
| CB1218100SCREEN | 100  | 10      |
| CB1218120SCREEN | 120  | 10      |
| CB1218150SCREEN | 150  | 10      |
| CB1218180SCREEN | 180  | 10      |

#### Peel & Stick Sandpaper for Orbital Sander

| Product No.  | Grit | Qty/pkg |
|--------------|------|---------|
| CB1218016PSA | 16   | 10      |
| CB1218020PSA | 20   | 10      |
| CB1218024PSA | 24   | 10      |
| CB1218036PSA | 36   | 10      |
| CB1218040PSA | 40   | 10      |
| CB1218050PSA | 50   | 10      |
| CB1218060PSA | 60   | 10      |
| CB1218080PSA | 80   | 10      |
| CB1218100PSA | 100  | 10      |
| CB1218120PSA | 120  | 10      |

## Sandpapers, Sanding Discs and Floor Polishing Pads - Get Professional Results from the Right Accessories.

- Choice** ♦ Choose from a variety of quality sandpapers and other floor prepreparation and maintenance materials to complete projects professionally from start to finish
- Increased Sales** ♦ Stock up on a good selection of sanding consumables to help your customers and increase your sales
- Adaptable** ♦ Our sandpapers and discs fit most popular sanding machines as well as floor polishers such as the Nobles Speedshine Heavy-duty Floor Polisher (see page E14)

### 7" Sanding Discs for SL7, S7R & HT7

| Product No. | Grit | Qty/pkg |
|-------------|------|---------|
| CB778016    | 16   | 25      |
| CB778024    | 24   | 25      |
| CB778036    | 36   | 25      |
| CB778040    | 40   | 25      |
| CB778050    | 50   | 25      |
| CB778060    | 60   | 25      |
| CB778080    | 80   | 25      |
| CB778100    | 100  | 25      |
| CB778120    | 120  | 25      |

### Sandpaper #136 for use with Velcro 8" Drum Sander

| Product No. | Grit | Qty/pkg |
|-------------|------|---------|
| CB136020V   | 20   | 25      |
| CB136040V   | 40   | 25      |
| CB136060V   | 60   | 25      |
| CB136080V   | 80   | 25      |
| CB136100V   | 100  | 25      |

### Sandpaper #152 HT8/EZ8 for Clarke & Hiretech type Sanders

| Product No. | Grit | Qty/pkg |
|-------------|------|---------|
| CB152016    | 16   | 25      |
| CB152020    | 20   | 25      |
| CB152024    | 24   | 25      |
| CB152036    | 36   | 25      |
| CB152040    | 40   | 25      |
| CB152050    | 50   | 25      |
| CB152060    | 60   | 25      |
| CB152080    | 80   | 25      |
| CB152100    | 100  | 25      |
| CB152120    | 120  | 25      |

### Sandpaper #136 for 8" Drum Sander

| Product No. | Grit | Qty/pkg |
|-------------|------|---------|
| CB136016    | 16   | 25      |
| CB136024    | 24   | 25      |
| CB136036    | 36   | 25      |
| CB136040    | 40   | 25      |
| CB136050    | 50   | 25      |
| CB136060    | 60   | 25      |
| CB136080    | 80   | 25      |
| CB136100    | 100  | 25      |
| CB136120    | 120  | 25      |

### 15" Screen Discs

| Product No. | Grit | Qty/pkg |
|-------------|------|---------|
| CB15060     | 60   | 25      |
| CB15080     | 80   | 25      |
| CB15100     | 100  | 25      |
| CB15120     | 120  | 25      |
| CB15150     | 150  | 25      |

### 17" Screen Discs

| Product No. | Grit | Qty/pkg |
|-------------|------|---------|
| CB17060     | 60   | 25      |
| CB17080     | 80   | 25      |
| CB17100     | 100  | 25      |
| CB17120     | 120  | 25      |
| CB17150     | 150  | 25      |

### Floor Polisher Pads

| Product No.     | Description                         | Qty/pkg |
|-----------------|-------------------------------------|---------|
| CB15THICK-BLACK | 15" Heavy-duty Black Stripping Pads | 5       |
| CB17THICK-BLACK | 17" Heavy-duty Black Stripping Pads | 5       |
| CB20THICK-BLACK | 20" Heavy-duty Black Stripping Pads | 5       |
| CB15THICK-GREEN | 15" Heavy-duty Green Scrubbing Pads | 5       |
| CB17THICK-GREEN | 17" Heavy-duty Green Scrubbing Pads | 5       |
| CB20THICK-GREEN | 20" Heavy-duty Green Scrubbing Pads | 5       |
| CB15THICK-TAN   | 15" Heavy-duty Tan Polishing Pads   | 5       |
| CB17THICK-TAN   | 17" Heavy-duty Tan Polishing Pads   | 5       |
| CB20THICK-TAN   | 20" Heavy-duty Tan Polishing Pads   | 5       |

## SilverLine Drum Sander - Speed. Power. Consistent Results.

- Balance**
- ♦ Weight is evenly distributed for balanced handling and operator comfort
  - ♦ Tilt action for a more controlled and even sanding result
  - ♦ Belt tension easily set and maintained to optimize motor longevity and performance

- Consistency**
- ♦ Constant 1800 rpm drum speed operates smoothly
  - ♦ Sands forwards and backwards for thorough sanding professional results

- User-friendly**
- ♦ Change sandpaper easily with unique cam lock system and rubber drum
  - ♦ Spring loaded cam lock system secures sandpaper of varying grit sizes quickly and easily.
  - ♦ Sandpaper secured simply without the use of unwieldy wedges or clamps that can lead to unsightly divots on flooring and machine jams and chatter
  - ♦ Use as a heavy-duty alternative to orbital sanders

### SL8

#### SL8V

Check out the new SL222V  
Velcro Replacement Drum!  
Great upgrade to make sanding  
that much more fun!



Drum removes easily  
to change sandpaper  
hassle-free.



Keep your maintenance costs  
low and simple by using  
standard "V"-pulleys and belts.



Solid aluminum construction adds durability  
without unnecessary weight for the best user  
comfort to an always satisfied customer.



Standard foam rubber-coated drum  
absorbs impact, thus prevents  
creating deep marks or scratches  
unlike common hard rubber drums.

| Model           | SL8                             |
|-----------------|---------------------------------|
| Description     | Essex SilverLine 8" Drum Sander |
| Motor           | 1.0hp, 115v, 18A                |
| RPM             | 3600                            |
| Drum            | 8" Foam Rubber-covered Drum     |
| Power Cord      | 25' ft.                         |
| Working Weight  | 115 lbs                         |
| Shipping Weight | 140 lbs                         |
| Velcro Version  | SL8V (with velcro drum)         |

# floor edger, sanding drums & accessories

## SilverLine Floor Edger - Power and Precision

- Rugged**
  - Full metal construction for rugged strength and durability
  - Polished steel finish keeps machine looking fresh and lowers cosmetic maintenance
- Professional**
  - 3600 RPM motor cuts smoothly and quickly for clean and professional results
  - Oversized vacuum fan and chamber work together to achieve superior dust pick up for easy clean-ups and finishing
- Control**
  - Conveniently placed handle allows for easy handling and control for precise edging work

### SL7



| Model                          | SL7                             |
|--------------------------------|---------------------------------|
| Description                    | Essex SilverLine 7" Floor Edger |
| Motor                          | 1.5hp, 115v                     |
| RPM                            | 3600                            |
| Disc Pad                       | 7" Steel-backed Rubber Pad      |
| Working Dimensions (L x W x H) | 10" x 9" x 13"                  |
| Working Weight                 | 28 lbs                          |
| Shipping Weight                | 28 lbs                          |

#### Dust Bags for Essex SilverLine Flooring Machines

| Product No. | Description                  |
|-------------|------------------------------|
| CL160608    | Dust Bag for SL8 Drum Sander |
| CL300602    | Dust Bag for SL7 Floor Edger |

## SilverLine Drum Exchange Program for SL8 - Recycle and grow your investment!

- Choice**
  - Choose your either the classic SL222 foam-rubber coated drum or the innovative SL222V Velcro Drum
  - Keep your sanders fresh and up to date without having to buy new equipment. Get more for your money.

### SL222V Velcro Drum

- Change sandpapers quickly with SilverLine's Velcro-backed sandpaper sheets
- Velcro is added to the standard SL222 drum to maintain the benefits of a soft and resilient drum and simplifies the sanding process for the end user

### SL222 Classic Foam-Rubber Drum

- Foam-rubber coating over aluminum drum offers the combined benefits of shock absorption & lightness
- Spring-loaded cam lock system allows for sandpaper of varying grits to fit easily without need for cumbersome and difficult to use bar clamp expansion systems



### SL222

### SL222V

#### SL8 Drum Exchange Program

| Product No. | Description                    |
|-------------|--------------------------------|
| SL222       | Standard Drum to Standard Drum |
| SL222RV     | Standard Drum to Velcro Drum   |
| SL222RV     | Velcro Drum to Velcro Drum     |
| SL222V      | Velcro Replacement on SL222RV  |

For details on how to take advantage of this opportunity, contact Uniquip or your sales representative today!

#### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

E10

WWW.uniquip.ca

#### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221



**BKS415M**



**BKS420T**

## Kodiak Industrial Vacuums - Beat the Dust

### Rugged Design

- ♦ Heavy-duty propylene tank on wet/dry vacuums for extra strength
- ♦ Contractor-tough steel tank on BKS800 fine particle vacuum provides rental-tough durability

### Mobility

- ♦ Castors and wheels brings the vacuum to you
- ♦ Self-contained accessories department lets you bring the right tools everywhere

### Cost-effective

- ♦ All units included Standard Vacuum Accessories Package to get you started with the essential money-making tools

### Versatile

- ♦ Kodiak industrial vacuums are available in a wide range of cleaning power and tank sizes to suit any jobsite needs
- ♦ Interchangeable accessories and consummable parts for easy maintenance and parts stocking



**BKS800**



| Model             | BKS315                                     | BKS415M                                    | BKS420T                                    | BKS800   |
|-------------------|--|--|--|--|
| Description       | Kodiak 11 Gallon Wet/Dry Heavy-duty Vacuum | Kodiak 24 Gallon Wet/Dry Heavy-duty Vacuum | Kodiak 30 Gallon Wet/Dry Heavy-duty Vacuum | Kodiak 21 Gallon Dry Fine Particle Extractor Industrial Vacuum |
| Motor             | 1.5hp                                      | 1.5hp                                      | 2 x 1.0hp                                  | 2 x 1.0hp  |
| Watts             | 1080W                                      | 1080W                                      | 2 x 750W                                   | 2 x 750W   |
| Air Flow          | 100 CFM                                    | 100 CFM                                    | 165 CFM                                    | 165 CFM  |
| Water Lift        | 90"  | 90"  | 70"  | N/A  |
| Tank Capacity     | 11 USg                                     | 24 USg                                     | 30 USg                                     | 21 USg   |
| Hose Length       | 38mm x 3m. (10' ft.)                       | 38mm x 3m. (10' ft.)                       | 38mm x 3m. (10' ft.)                       | 38mm x 3m. (10' ft.)   |
| Power Cord Length | 8.5m (28' ft.)                             | 8.5m (28' ft.)                             | 8.5m (28' ft.)                             | 8.5m (28' ft.)   |
| Working Weight    | 22 lbs                                     | 49 lbs                                     | 53 lbs                                     | 68 lbs   |
| Shipping Weight   | 33 lbs                                     | 50 lbs                                     | 53 lbs                                     | Ships in 2 boxes: 75 lbs                                       |








## Standard Vacuum Accessories Package (all parts available separately)

| Product No. | Description                          |
|-------------|--------------------------------------|
| BKSV06387   | 2 Aluminium-reinforced Plastic Tubes |
| BKSV0003    | Crevice tool                         |
| BKSV06389   | Aluminium-reinforced Plastic Wand    |
| BKSV06384   | Carpet/Floor Tool                    |
| BKSV06385   | Squeegee Tool                        |
| BKSV06295   | Round brush                          |
| BKSV06388   | Adaptor                              |



## Optional Vacuum Accessories

| Product No. | Description  | Product No. | Description   |
|-------------|--|-------------|---|
| BKSV00042   |  Frontal Tool | BKSV02741   |  Paper Bag Filter for BKS315 |
| BKSV00084   |  Hose Ends    | BKSV02995   |  Hepa Filter                 |
| BKSV00580   |  Wands        | BKSV00123   |  Hepa Filter Ring            |
|             |  | BKSV02859   |  Conical Basket              |

## Ebac Low Temperature Dehumidifiers\* - **EBTRITON**

- Capacity**
- Draws 6 to 12 gallons per day to efficiently control and maintain jobsite climate
  - Low temperature operation designed for rental yards, stores, and other commercial applications
- Strength**
- Steel cage protects unit from daily jobsite abuse
  - Quality components deliver long-lasting, low-maintenance performance
- Cost-effective**
- Low electrical consumption optimizes budget and results

### EBCD35



**\*Product will only operate in 60% or more humidity.  
NOT DESIGNED FOR USE in low humidity conditions.**

| Model                                 | EBCD35                                     | EBTRITON                                    |
|---------------------------------------|--|---|
| <b>Description</b>                    | Ebac 6 Gallon Low Temperature Dehumidifier | Ebac 12 Gallon Low Temperature Dehumidifier |
| <b>Motor</b>                          | 1/3hp, 115v, 4A                            | 60 Hz, 115v, 5A                             |
| <b>Max.Capacity Recovery</b>          | 6 Gallons/day                              | 12 Gallons/day                              |
| <b>Refrigerant</b>                    | R-12                                       | R-22  |
| <b>CFM</b>                            | 170  | 282   |
| <b>Working Dimensions (L x W x H)</b> | 14" x 14" x 21"                            | 15.5" x 19.5" x 29"                         |
| <b>Working Weight</b>                 | 57 lbs                                     | 75 lbs                                      |
| <b>Shipping Weight</b>                | 60 lbs                                     | 80 lbs                                      |

## Nobles Anser Handheld Carpet Extractor - Compact cleaning solution.

- Compact** ♦ Lightweight handheld design allows deep cleaning in awkward spots from curtains to upholstery
- Easy Setup** ♦ 4" in clear hand tool and 8' ft. solution hose included for instant deployment
- Rental-tough** ♦ Polyethylene casing protects unit from damage in repeated rental usage



### CA608681



### CA611459

| Model                           | CA611459                                      |
|---------------------------------|---|
| Description                     | Nobles Marksman 412 4-Gallon Carpet Extractor |
| Capacity                        | 4 US Gallon                                   |
| Cleaning Path                   | 12"   |
| Brush Speed                     | 2250 rpm                                      |
| Waterlift                       | 91.5"   |
| Pressure                        | 65 psi  |
| Coverage Rate                   | 1400 sq.ft/hr                                 |
| Shipping Dimensions (L x W x H) | 14.5" x 23.5" x 30"                           |
| Shipping Weight                 | 68 lbs  |

#### CA190710 - Upholstery Kit for Marksman 412

##### Includes:

- 1.5" x 15' ft Vacuum Hose
- 3/8" x 15' ft Solution Hose
- 5" Hand Tool
- Mesh Carry Bag



| Model                           | CA608681  |
|---------------------------------|---|
| Description                     | Nobles Anser 2-Gallon Portable Carpet Extractor |
| Capacity                        | 2 US Gallon                                     |
| Cleaning Path                   | 4" (with included hand tool)                    |
| Hose Length                     | 8' ft   |
| Waterlift                       | 71"   |
| Pressure                        | 30 psi  |
| Cord Length                     | 25' ft.   |
| Shipping Dimensions (L x W x H) | 26" x 12" x 17"                                 |
| Shipping Weight                 | 26 lbs  |

## Nobles Marksman 412 Industrial Carpet Extractor - Suck up that dirt!

- Performance:** ♦ 13" in. cleaning path and 4 gallon solution tank cleans carpet quickly and efficiently
- ♦ Dual cleaning action that loosens dirt while breaking it down
- Transport-friendly:** ♦ Fold-down handle for convenient transport and storage
- Adaptable:** ♦ Self-adjusting brush height optimizes cleaning on different carpets
- ♦ Use with optional upholstery kit to clean the whole house

#### Uniquip 4-in-1 Shampoo



| Product No. | Qty/Case                  |
|-------------|---------------------------|
| UCS01       | 12 x 1-litre bottles/case |

# Carpet dryer and floor polisher

## Nobles Cyclone 3-Speed Carpet Dryer - Dries fast.

- Efficient** ♦ Reduce drying time of wet or damp carpet for faster job completion
- Versatile** ♦ Dries hard floors, fresh paint and concrete sealer as well as carpet  
♦ Expand flooring material options and installation with multiple flooring applications
- Portable** ♦ Heavy-duty plastic casing protects motor from jobsite accidents  
♦ Adjustable leg height allows unit to set up on any surface for optimal drying needs



**CA9001028**

|                        |                             |
|------------------------|-----------------------------|
| <b>Model</b>           | <b>CA9001028</b>            |
| <b>Description</b>     | Nobles Cyclone Carpet Dryer |
| <b>Motor</b>           | 115V, 4.8A, 0.5hp           |
| <b>Speeds</b>          | 3                           |
| <b>Cord Length</b>     | 20' ft.                     |
| <b>Air Flow</b>        | 2 000 cu.ft/min             |
| <b>Shipping Weight</b> | 32 lbs                      |

## Nobles Speedshine 1700HD Heavy-duty Floor Polisher- For a clean & professional finish.

- Powerful:** ♦ 1.5 hp, 175 rpm polisher will buff, polish and burnish using standard polishing discs  
♦ Use with optional Hexpin Floor Polishing system for an extra fine finish from carbide polishing chips
- Ergonomic:** ♦ Adjustable handle increases user comfort
- Tough:** ♦ Contractor-tough polyethylene casing will not crack, rust, dent or corrode for an extended service life

|  |   |
|--|---|
| <b>Model</b>                           | <b>CA608236</b>                                 |
| <b>Description</b>                     | Nobles Speedshine 17" Heavy-duty Floor Polisher |
| <b>Horsepower</b>                      | 1.5hp   |
| <b>RPM</b>                             | 175   |
| <b>Cleaning Path</b>                   | 17"   |
| <b>Polishing Area (sq.in)</b>          | 227   |
| <b>Cord Length</b>                     | 50' ft.   |
| <b>Shipping Dimensions (L x W x H)</b> | 25" x 22" x 51"                                 |
| <b>Shipping Weight</b>                 | 100 lbs   |



**CA608236**

# Pneumatic floor nailer & stapler

## Primatch Pneumatic Hi-Performance Flooring Nailer & Stapler - Clearly Ahead!

- Innovative:**
- ♦ Innovative oil-free firing valve runs continuously with low maintenance needs
  - ♦ High-speed discharge valve reduces air consumption and therefore lowers power requirement on compressors
  - ♦ Well-balanced valve countersinks fasteners efficiently independent of striking force, resulting in a more ergonomic design and reduced operator stress

- Increased Efficiency:**
- ♦ Compact design allows installer to get 4.5" inches closer to the end wall, increasing significant time savings with the installation of 1 to 2 additional boards
  - ♦ Install prefinished flooring quickly and safely with large composite base that prevents scratching of flooring surface
  - ♦ Quick loading high-capacity magazine loads 110 nails or staples at one time to increase productivity

- Ergonomic:**
- ♦ Comfort-grip handle softens vibration and increases control for user
  - ♦ Optimize stability and grip on flooring for safe and comfortable operation

- Adaptable:**
- ♦ Choose the right machine from the PR240 (L or T) for nailing or the PRP260 stapler using standard Bostitch staples
  - ♦ Ask about various adapter plates and Trak-Edge nailer/stapler shoe accessories to create the complete hardwood solution



**PR240 (L or T)**



**PRP260**

## Primatch®



Innovative firing valve is easy to take apart for lubricating!  
One drop is all that the new Primatch tool needs for long service life!

| Model                           | PR240  | PRP260  |
|---------------------------------|--|---|
| Description                     | Primatch Professional Pneumatic Floor Nailer | Primatch Professional Pneumatic Floor Stapler |
| Operating Pressure              | 80 PSI                                       | 90 PSI  |
| Magazine Capacity               | 110 nails                                    | 110 staples                                   |
| For use with                    | L-nails = PR240L,<br>T-nails = PR240T        | Standard Bostitch Staples                     |
| Working Weight                  | 11 lbs                                       | 12 lbs  |
| Shipping Dimensions (L x W x H) | 20" x 20" x 3"                               | 20" x 20" x 3"                                |
| Shipping Weight                 | 16 lbs                                       | 16 lbs  |

**English Assistance**

(T) 1.888.332.4012 (F) 1.866.567.0956

**E15**

**WWW.uniquip.ca**


**French Assistance**

(T) 1.800.332.4012 (F) 1.866.825.2221

# m anual hardwood nailer & stapler



**PR330 (L or T)**

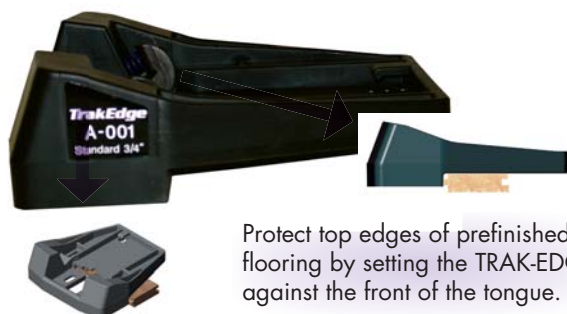

Protect top edges of prefinished flooring by setting the TRAK-EDGE against the front of the tongue.

Use the impact resistant Trak-Edge as a tapping block to correctly line up and set delicate boards.

## Primattech Manual Hardwood Nailer - Nail it everytime.

- Comfortable:** ♦ Ergonomic lightweight design improves productivity and reduces fatigue
- Hassle-free Operation:** ♦ Multiple-hit system leaves nails not fully driven into material to remain positively positioned for additional strikes  
♦ Fit tight boards and set nails safely and effectively without scratching surface with composite base
- Portable** ♦ Durable aluminium construction delivers contractor-toughness without adding unnecessary weight

| Model                           | PR330                                       |
|---------------------------------|---|
| Description                     | Primattech Professional Manual Floor Nailer |
| Magazine Capacity               | 110 nails                                   |
| Nail Type                       | L-nails = PR330L, T-nails = PR330T          |
| Working Weight                  | 8 lbs                                       |
| Shipping Dimensions (L x W x H) | 20" x 20" x 3"                              |
| Shipping Weight                 | 12 lbs                                      |

## New Primattech Trak-Edge Adapter-Protects Factory-finished Flooring.

- Control** ♦ High impact composite base for superior glide and stability
- Protects** ♦ Spring-loaded tapping block design maintains unit in original position as it fires, eliminating the need to hit and splinter the boards with a mallet



| Trak-Edge Adaptor Plates |   |
|--------------------------|---|
| Product No.              | Description                                 |
| PRA001                   | Trak-Edge for 3/4" Hardwood Strips          |
| PRA004                   | Trak-Edge for 9/16" to 5/8" Hardwood Strips |

| Nails and Staples |                                     |
|-------------------|-------------------------------------|
| Product No.       | Description                         |
| PRC1000-L         | 2" L-type Hardwood Flooring Nails   |
| PR1000-T          | 2" T-type Hardwood Flooring Nails   |
| PRS903            | 1.5" Bostitch-type Flooring Staples |
| PRS901            | 2" Bostitch-type Flooring Staples   |



**English Assistance**

(T) 1.888.332.4012 (F) 1.866.567.0956

**E16**

**WWW.UNIQUIP.CA**

**French Assistance**

(T) 1.800.332.4012 (F) 1.866.825.2221

## Max SuperStapler - When speed is of the essence.

- Efficient**
- ♦ Rapid fire trigger valve drives 15 staples per second to make the SuperStapler the fastest crown stapler in the market
  - ♦ Patent pending easy jam clearance makes reloading and fixing jams fast and effective
  - ♦ Staples multiple materials such as sheathing, subflooring, roof decking, furniture frames, pallets, crates and vinyl siding

- Low Maintenance**
- ♦ Patented end cap filter prevents foreign substances from entering the tool for extended durability
  - ♦ Self-cleaning filter automatically ejects any dirt from the tool when the air hose is disconnected

- Ergonomic**
- ♦ Comfortable rubber grip for operator comfort
  - ♦ Lightweight (only 4.8 lbs!) aluminum frame and cylinder cap stands up to jobsite abuse

| Model                     | DUTMXTA551HWF                                  |
|---------------------------|--|
| Description               | Max SuperStapler                               |
| Magazine Capacity         | 157 16 gauge staples                           |
| Operating Pressure        | 70 - 100 psi (Regulator)                       |
| Air Consumption           | 0.030 ft³/cycle<br>@ 90 psi operating pressure |
| Dimensions<br>(L x W x H) | 13-5/8" x 3-3/16" x 11-1/4"                    |
| Weight                    | 4.8 lbs  |



### DUTMXTA551HWF

| Staples for DUTMXTA551HWF |           |         |
|---------------------------|-----------|---------|
| Product No.               | Size      | Qty/box |
| DUS16048                  | 1.5" in.  | 10000   |
| DUS16056                  | 1.75" in. | 10000   |
| DUS16064                  | 2" in.    | 10000   |

## Crain Pro Stapler Kit - For proven performance.

- Compact**
- ♦ Powerful 11A solenoid drives staples effectively into hardwoods
  - ♦ Low overall height of 7.75" fits under stair risers for greater versatility
  - ♦ Pointed tip easily parts carpet yarns for safe and clean stapling

- Easy to use**
- ♦ Jam resistant magazine holds 100 staples for low maintenance and increased efficiency
  - ♦ Easy-access driver channel for quick removal of broken staples
  - ♦ High impact plastic shell for rugged durability and long-lasting service life

- Safe**
- ♦ Trigger lock design for extra safety
  - ♦ Complete kit includes safety goggles for protection and handy carrying case


| Model                              | CR615   |
|------------------------------------|---|
| Description                        | Crain Pro Stapler Kit   |
| Magazine Capacity                  | 100 staples   |
| Nail/Staple Type                   | CR619D 9/16" Divergent Point Staples,<br>DuoFast #5418 or #5415 (or generic)<br>Electric Tacker Staples |
| Working Weight                     | 4 lbs   |
| Shipping Dimensions<br>(L x W x H) | 16" x 11" x 3.5"  |
| Shipping Weight                    | 6.5 lbs   |



### CR615

#### 9/16" Divergent Point Staples for CR615 Pro Stapler

| Model    | CR619D |
|----------|--------|
| Qty/case | 5000   |



## Omega Contractor Series Electric Air Compressors - The Ideal for Indoor Contractor Needs.



**OMDD1004**



**OMDD2022B**



**OMDD1503**



**OMND1008**



### Space-conscious

- ◆ Compact design allows for portability and easy set-up
- ◆ Choose from pancake, hot-dog or mini-wheelbarrow designs to suit jobsite needs
- ◆ Ideal for small to medium-sized indoor contractor work

### Strength

- ◆ Die cast aluminium pump encased in cast iron sleeve for added jobsite protection
- ◆ Steel valves increase working life

### Low-maintenance

- ◆ Quality components and assembly mean lower maintenance time and costs
- ◆ Oil-less pump designed for hassle-free operation

### Safety-first

- ◆ All units are factory tested prior to shipment to ensure quality product delivery
- ◆ One-year standard warranty delivers peace of mind for investment
- ◆ Manual reset protects against overload damage

| Model                  | OMDD1004  | OMDD1503  | OMDD2022B   | OMND1008   |
|------------------------|---|---|---|--|
| <b>Description</b>     | Omega Contractor Series 1.0hp 4 USg Electric Pancake Compressor | Omega Contractor Series 1.5hp 3 USg Single-tank Electric Compressor | Omega Contractor Series 2.0hp 4 USg Twin-tank Electric Compressor | Omega Contractor Series 1.0hp 8 USg Mini Wheelbarrow Electric Compressor |
| <b>Motor/Engine</b>    | 1.0hp, 115v, Single-phase                                       | 1.5hp, 115v, Single-phase   | 2.0hp, 115v, Single-phase   | 1.0hp, 115v, Single-phase  |
| <b>CFM - 40 PSI</b>    | 6   | 6   | 6   | 4.8  |
| <b>CFM- 90 PSI</b>     | 4.6   | 4.6   | 4.6   | 3.7  |
| <b>MAX PSI</b>         | 125   | 125   | 125   | 125  |
| <b>Tank Size</b>       | 4   | 3   | 4   | 8  |
| <b>Noise Level DBA</b> | 70  | 70  | 70  | 70   |
| <b>Working Weight</b>  | 65 lbs  | 55 lbs  | 80 lbs  | 70 lbs   |
| <b>Shipping Weight</b> | 67 lbs  | 57 lbs  | 82 lbs  | 72 lbs   |



**OMPUK1508MDC**



**OMPUK6508G**



**OMPUK5508G**

## Omega Professional Series Gas & Electric Air Compressors - Jobsite tough.

- Rugged**
- ♦ Belt-drive design deliver longer run-times with low maintenance demands
  - ♦ Cast-iron pumps feature splash-type lubrication for consistent performance and durability

- Quality**
- ♦ All gas units feature GX-series Honda engines for reliable start-ups
  - ♦ All units equipped with steel valves for longer life

- User-friendly**
- ♦ Gas units feature idle-down throttle control for safe continuous operation
  - ♦ Dual-mode control on electric unit (OMPUK2008MDC) for both start & stop pressure switch control or constant speed operation to suit user needs

| Model                  | OMPK5020VP   |
|------------------------|--|
| <b>Description</b>     | Omega Professional Series 5.0hp 20 USg Electric Compressor |
| <b>Motor</b>           | 115v, Single-phase   |
| <b>CFM - 40 PSI</b>    | 7.9  |
| <b>CFM- 90 PSI</b>     | 6.4  |
| <b>MAX PSI</b>         | 125  |
| <b>Tank Size (USG)</b> | 20   |
| <b>Noise Level DBA</b> | 70   |
| <b>Working Weight</b>  | 150 lbs  |
| <b>Shipping Weight</b> | 200 lbs  |

**OMPK5020VP**



| Model                  | OMPUK1508MDC  | OMPUK5508G   | OMPUK6508G   |
|------------------------|---|--|--|
| <b>Description</b>     | Omega Professional Series 1.5hp 8 USg Electric Compressor | Omega Professional Series 5.5hp 8 USg Gas Compressor | Omega Professional Series 5.5hp 8 USg Gas Compressor |
| <b>Motor/Engine</b>    | 115v, Single-phase  | 5.5hp Honda GX160 OHV                                | 5.5hp Honda GX160 OHV                                |
| <b>CFM - 40 PSI</b>    | 6.6   | 12.5   | 16.5   |
| <b>CFM- 90 PSI</b>     | 6.0   | 10.5   | 14   |
| <b>MAX PSI</b>         | 125   | 125  | 125  |
| <b>Tank Size (USG)</b> | 8   | 8  | 8  |
| <b>Noise Level DBA</b> | 70  | Run = 90, Idle = 82                                  | Run = 90, Idle = 82                                  |
| <b>Working Weight</b>  | 214 lbs   | 195 lbs  | 250 lbs  |
| <b>Shipping Weight</b> | 220 lbs   | 200 lbs  | 255 lbs  |

## Tools and Accessories for Vinyl and Laminate Flooring - Scrape, Stretch, & Trim

### Floor Scraper

- ◆ Cleans and scrapes floors easily with 8" replaceable blades
- ◆ Lightweight and adjustable handle combine for maneuverability and user comfort

### Vinyl Tile Cutter

- ◆ The CR001 features a self-measuring design to stop position cutter directly at the edge of the last full field tile to accurately cut all resilient flooring for pattern matching

### Laminate Clamps

- ◆ Clamp and hold laminates planks across widths up to 18' ft with CR565 Strap Clamp
- ◆ Sturdy metal housing keeps messy nylon strap out of the way
- ◆ Press down on the long handle for extra leverage

### Floor Vise

- ◆ Add a CR566 Floor Vise to extend clamping reach and allows for clamping in any direction by attaching directly onto laminate
- ◆ Fast lever-based action and deep draw suction cup gives superior holding force without marring laminate surface

#### Manual Floor Preparation Tools

|                                   |  |
|-----------------------------------|--|
| <b>Model</b>                      | <b>CR375</b>   |
| <b>Description</b>                | Crain Floor Scraper                                    |
| <b>Working Dimensions (L x W)</b> | Adjustable Handle Length = 39" - 59", Blade Width = 8" |
| <b>Weight</b>                     | 4 lbs  |
| <b>Replacement Blade</b>          | CR377 Replacement Blades (9/pack)                      |



**CR375**



#### Crain Vinyl Cutter

|               |              |
|---------------|--------------|
| <b>Model</b>  | <b>CR001</b> |
| <b>Weight</b> | 30 lbs       |

**CR001**



**CR565**




**CR566**


## Tools and Accessories for Carpeting - Scrape, Stretch, & Trim

- Knee Kickers**
  - ♦ Long adjustable steel pins with pin dial showing pin length help position carpet easily
  - ♦ Available in two different sizes: CR600 (19" - 23") & CR612 (17.5" - 21.5") to suit various demands
- Carpet Stretcher**
  - ♦ To prevent warping, stretch out carpet with the CR500 Deluxe Carpet Stretcher
  - ♦ Kit includes 3 extension tubes for increased reach and efficiency
- Heat Bond Iron**
  - ♦ Join carpets together seamlessly with the CR900 Heat Bond Iron
  - ♦ Specially designed to easily glide under carpets to let seams be closely joined at the back onto hot adhesive carpet tape
- Carpet Adhesive**
  - ♦ High quality adhesive tape seamlessly attaches carpet pieces together for professional finish
  - ♦ Easy to apply with any heat bond iron

**CR612**

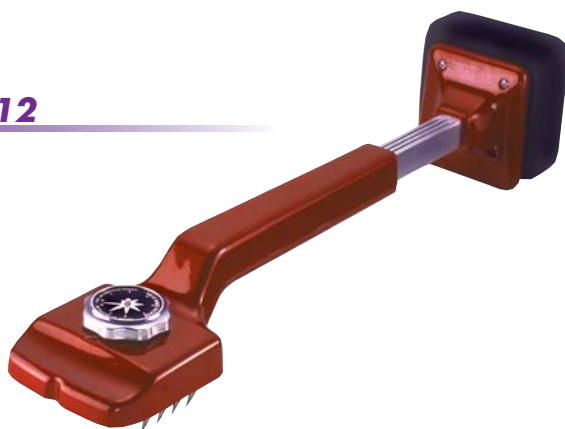

**CR600**

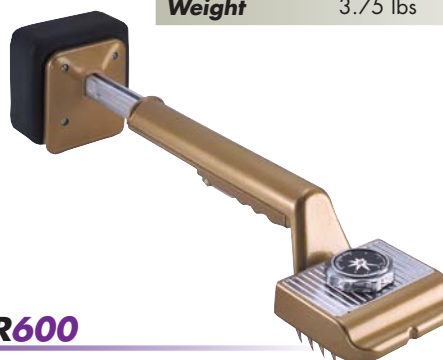

| Crain Knee Kickers |           |               |
|--------------------|-----------|---------------|
| Model              | CR600     | CR612         |
| Adjustment Length  | 19" - 23" | 17.5" - 21.5" |
| Weight             | 3.75 lbs  | 3 lbs         |



| Crain Carpet Stretcher |   |
|------------------------|---|
| Model                  | CR500   |
| Kit Includes           | Driving head, speed roller tail block, transfer tube, 3 extension tubes, and auto-lock tube |
| Weight                 | 53 lbs  |

**CR500**



**CR900**

| Crain Heat Bond Iron |              |
|----------------------|--------------|
| Model                | CR900        |
| Approx. Heat Range   | 250° - 425°F |
| Watt/Volt            | 800 W/110v   |
| Weight               | 3.5 lbs      |



**CR900-01**



## Rubi Masonry Tools and Accessories - Contractor-tough.

### Mixing Paddles

- ♦ Available in 2 different sizes to suit application needs
- ♦ Ideal for mixing cement, mortar and epoxy paints
- ♦ 13/32" diameter hexagonal shaped shaft head can be adapted to electric drills

### Core Drills

- ♦ Choose either manual or electric drill models
- ♦ Rubi coring bits available in both tungsten carbide and diamond varieties to drill through tiles, concrete and other masonry materials easily without damage
- ♦ Shallow coring length designed for use with tiles and flooring materials

### Contractor Accessories

- ♦ Quality tile nippers and knee pads for contractor use

### Rubi Mixing Paddles



| Model                            | RU65930                | RU65931                      |
|----------------------------------|------------------------|------------------------------|
| Description                      | Rubi 15" Mixing Paddle | Rubi 21" Mixing Paddle       |
| For use with                     | Cement & Mortar        | Cement, Mortar & Epoxy Paint |
| Quantity of Material to be Mixed | 33 - 44 lbs            | 33 - 44 lbs                  |
| Recommended RPM                  | 200 - 500              | 200 - 500                    |
| Minimum Drill Power              | 700 W                  | 500 W                        |
| Working Dimensions (L x W)       | 15.75" x 4"            | 21-11/16" x 4"               |

### Rubi Tools for Drilling Masonry & Flooring Materials



| Model        | RU15925  | RU50900   | RU04995  |
|--------------|--|---|--|
| Description  | Rubi Hand Drill Attachment for Manual Tile Cutters | Rubi Foragres Drilling Guide                                | Rubi Coring Drill Bits for Tiles   |
| For use with | Rubi TS & TR Series Tile Cutters (see page E4)     | Portable Drills   | Portable Drills with Rubi TS-Plus & TR Series Tile Cutters ONLY  |
| Includes     | 1" drill bit                                       | See accessories chart for optional Rubi diamond coring bits | Plastic carrying case, drilling attachment, and tungsten carbide bits of: 1-1/16", 1-3/8", 1-3/4", 2-3/16", 2-9/16", 2-3/4" & 3-3/8" |

### Rubi Diamond Coring Bits for RU50900 Foragres Drilling Guide



| Product No. | Diameter |
|-------------|----------|
| RU04983     | 3/8"     |
| RU04970     | 3/4"     |
| RU04971     | 1-1/8"   |
| RU04972     | 1-3/8"   |
| RU04973     | 2"       |
| RU04974     | 2-9/16"  |
| RU04975     | 3"       |
| RU04976     | 4"       |

### Rubi Accessories



| Model       | RU65926                  | RU65916                   |
|-------------|--------------------------|---------------------------|
| Description | Rubi Ceramic Tile Nipper | Rubi Knee Pad (2 per set) |

# Construction tower light



Illuminate your workspace at night.



Components come apart for easy transportation

**FSTL1000**

## Endura Contractor-use 1000w Metal Halide Tower Light - Let there be light.

### Jobsite-tough

- ♦ Rugged wheel cart design includes extra weight bar for balance and stability
- ♦ Pneumatic wheels give better traction and durability for jobsite use
- ♦ Powers off portable generators to light up anywhere

### Clarity

- ♦ Powerful bright white light from metal halide bulb illuminates clearly without any colour distortion
- ♦ White static-paint finish fits in with both party rentals and construction site use
- ♦ 10 000 hour metal halide bulb included

### Versatility

- ♦ Telescoping masts adjusts from 4.5' up to 12.5'
- ♦ Narrow cart fits through small doorways for easy movement from room to room
- ♦ Remove components easily for storage and transportation
- ♦ Assembly required for optimal savings on shipping costs with flat-packed packaging

### Operator Safety

- ♦ Tempered glass lens set in steel frame and aluminium reflector with drain hole protects lamp from overheating and shattering
- ♦ Steel springs and rubber washers combine to dampen vibration from movement on tough terrain
- ♦ Weather-resistant power switch works through extreme temperatures

| Model              | FSTL1000                 |
|--------------------|--------------------------|
| Description        | Endura 1000w Tower Light |
| Power Requirements | 120V, 60 Hz              |
| Amps               | 15A                      |
| Watts              | 1000                     |
| Net Weight         | 125 lbs                  |
| Shipping Weight    | 190 lbs                  |

### Metal Halide Replacement Bulb for FSTL1000 Tower Light



| Model           | FSBD-BULB1000 |
|-----------------|---------------|
| Watts           | 1000 w        |
| Shipping Weight | 1 lb          |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

F1

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221



Wide extendable cradles support large wallboard sheets for loading.



Flip cradle flat to lift wallboard up to desired height.



Set wallboard to ceiling for installation.

## REWL11

### Endura Wallboard Lift - Lift up to new heights.

#### Increased Efficiency

- ◆ Single operator design for increased labour efficiency
- ◆ Smooth-action telescoping mast lifts wallboard up to 11' feet
- ◆ Add the optional REWL11-EXT to extend reach up to 15' feet
- ◆ Tilting cradle gets wallboard to fit at any angle for creating cathedral ceilings or other architectural effects

#### Easy Operation

- ◆ Easy assembly lets you set up anywhere
- ◆ Disassembles quickly into folding parts for transport
- ◆ Foot operated brake with rubber feet sets lift in position for easy operation


#### Contractor-tough

- ◆ Rugged steel body construction for extra durability
- ◆ Pulley system features brass pulleys and aerospace-use cable for durability and strength
- ◆ Wide wheeled tripod base offers stability and mobility for easy movement within jobsite

| Model   | REWL11                 |
|---|------------------------|
| Description   | Endura Wallboard Lift  |
| Weight Capacity   | 150 lbs                |
| Sheet Sizes   | up to 4' ft. x 16' ft. |
| Loading Height  | 34" inch               |
| Extended Height   | 11' ft.                |
| Extended Height with<br>Optional Extension Kit REWL11-EXT | 15' ft                 |
| Net Weight  | 100 lbs                |
| Shipping Weight   | 115 lbs                |

#### Extension Kit for REWL11 Wallboard Lift

| Model           | REWL11-EXT |
|-----------------|------------|
| Extended Reach  | 15' ft.    |
| Shipping Weight | 35 lbs     |



Patented Unilink Technology for hassle-free operation.

Get the most bending space with full 14" or 19" throat depth and 2-3/8" mouth opening.



Add a Tapro Snap Stand for mobility and portability.



Shown with optional Wheel Kit TA11989.

## **TAPRO-14-10**

## **TAPRO-19-10**

### **Tapco Professional Aluminium Benders - Bends and manufactures trim work on job site.**

- Advanced Design:**
  - Never adjust again with exclusive Unilink Technology
  - Original 'Floating Hinge' design delivers unparalleled bending performance
- Performance:**
  - Lightweight, computer designed die castings for strong, durable performance
  - Fast, strong, positive clamping with extra wide throat depth and mouth opening
  - 180° hemming capability for making more rigid panels
- Expandable:**
  - Add optional TASNAP-STAND to create mobile portable bending table
  - See page F4 for accessories to create the perfect bending solution

| Model                                  | TAPRO-14-10                 | TAPRO-19-10                 |
|--|-----------------------------|-----------------------------|
| Description                            | Tapro Pro 14 Aluminum Brake | Tapro Pro 19 Aluminum Brake |
| Throat Depth                           | 14"                         | 19"                         |
| Mouth Opening                          | 2 3/8"                      | 2 3/8"                      |
| Working Length                         | 10.5' ft.                   | 10.5' ft.                   |
| Bending Capacity - Aluminum            | up to 0.030                 | up to 0.030                 |
| Bending Capacity - Galvanized Steel    | up to 28 ga.                | up to 28 ga.                |
| Bending Capacity - Copper Sheet & Coil | up to 20 oz                 | up to 16 oz                 |
| Dimensions ( L x W x H)                | 11' x 2' x 20"              | 11' x 2' x 25"              |
| Net Weight                             | 106 lbs                     | 121 lbs                     |
| Shipping Weight                        | 136 lbs                     | 151 lbs                     |

# a ccessories for aluminium benders



## TASW

| Model           | TASW                                |
|-----------------|-------------------------------------|
| Description     | Tapro Side-Winder Metal Coil Feeder |
| Capacity        | up to 24" wide coils                |
| Shipping Weight | 24 lbs                              |


## Tapco Side-Winder - Prevent coil damage.

- Simplify:** ♦ Decrease brake damage by feeding coil directly into the PRO-series brake jaw
- Organize:** ♦ Keeps the coil at your side where you need it
- Quick Installation:** ♦ Attaches in seconds to the TAPRO-14-10 or the TAPRO-19-10 PRO-series aluminium brakes



## Tapco Pro Cut-Off - Make factory quality cuts right on your brake.

- Versatile:** ♦ Produces straight, square cuts to reduce scrap and eliminate knifing damage to costly bending hinges  
♦ Cut coiled or sheet metal and vinyl without leaving the bender to use dangerous utility knives and open blades
- Tough:** ♦ Lightweight aluminium construction for lasting performance  
♦ Hardened and captured tool steel cutting knives for safety and durability  
♦ Moulded carrying case protects tool when not in use

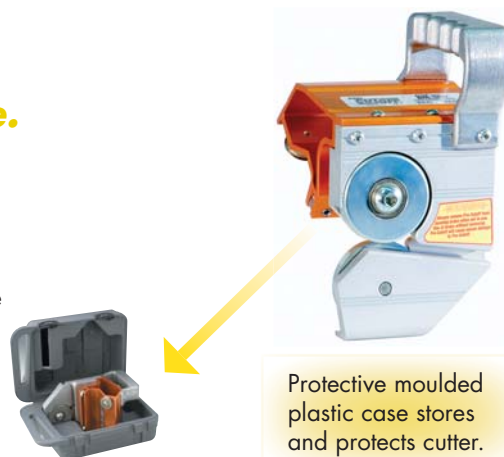

## TAPCO



Shown with optional Wheel Kit TA11989.

## TASNAP-STAND

| Model             | TASNAP-STAND                   |
|-------------------|--------------------------------|
| Description       | Tapro Heavy-duty Support Stand |
| Height Adjustment | 29" - 34"                      |
| Shipping Weight   | 37 lbs                         |

### Optional Wheel Kit for TASNAP-STAND

| Model           | TA11989                              |
|-----------------|--------------------------------------|
| Wheels          | 10" Pneumatic wheels with steel hubs |
| Shipping Weight | 37 lbs                               |

## Tapco Snap Stand - Heavy-duty Brake Support.

- Balance:** ♦ Legs adjust independently for level support on uneven ground  
♦ Five height adjustments from 29" to 34" to set brake to user height and comfort
- Portability:** ♦ Brake and saw table easily snaps and locks in place in seconds  
♦ Folds flat for easy storage  
♦ Add TA11989 Optional Wheel Kit for mobility
- Durability:** ♦ Lightweight aluminium construction for added durability



**PC300**

## Kraft Super-Pro Texture Gun & Hopper - Spray at will.

### Control

- ♦ Spray walls & ceilings, stucco, decking, fireproofing, & waterproofing materials easily and cleanly
- ♦ Large hopper with moulded built-in easy to grip handle for better control
- ♦ Exact built-in 40° degree angle on hopper is over twice the angle of most competitors for better ceiling work

### Innovation

- ♦ New PC307 gun cylinder comes pre-assembled in a one-piece bearing frame for simple maintenance
- ♦ Interchangeable cylinder design works with other gun manufacturers for easy parts inventory

### Kraft Super-Pro Texture Sprayer Gun & Hopper Assembly



| Model                           | PC300   |
|---------------------------------|---|
| Description                     | Kraft Super-Pro 1hp Texture Sprayer Complete Unit |
| Compressor                      | 1hp Capacitor-start Electric Unit                 |
| CFM                             | 6.2   |
| PSI                             | 25  |
| Hopper Capacity                 | 2.5 USg (9.6 L)                                   |
| Air Tips                        | 1/8" & 3/32"                                      |
| Working Dimensions (L x W x H)  | 15" x 19" x 34"                                   |
| Working Weight                  | 100 lbs   |
| Shipping Dimensions (L x W x H) | 16" x 20" x 35"                                   |
| Shipping Weight                 | 108 lbs   |

| Model           | PC301           |
|-----------------|-----------------|
| Hopper Capacity | 2.5 USg (9.6 L) |
| Air Tips        | 1/8" & 3/32"    |
| Shipping Weight | 15 lbs          |

### Kraft Super-Pro Texture Sprayer Gun Cylinder



| Model           | PC307 |
|-----------------|-------|
| Shipping Weight | 2 lbs |

## Earlex Wallpaper Steamer & Stripper - Power Cleaning

### User-friendly

- ♦ Runs on standard electrical current for use in households
- ♦ Comes with accessories for thorough stripping of paint and wallpaper
- ♦ Storage spools for cord set & steam hose for easy storage

### Safe Design

- ♦ Locking radiator cap with pressure safety lever to prevent operator injury
- ♦ Integral water-level indicator lets you see your progress

## WAEARLEX



| Model           | WAEARLEX                            |
|-----------------|-------------------------------------|
| Description     | Earlex Wallpaper Steamer & Stripper |
| Motor           | 110V, 12.5A                         |
| Water Capacity  | 2 Gallons                           |
| Shipping Weight | 17 lbs                              |



# airless electric paint sprayers & accessories

## Hero H2K Airless Electric Paint Sprayer - It's a new era for professional painters



**HOH2K3819S**



**HOH2K3819C**

### Compact

- ♦ Compact design makes for easy portability to any work area
- ♦ Choose either the sled-styled cart or roll-cage stand to suit jobsite needs

### Simple Maintenance

- ♦ The complete unit can be serviced right on jobsite with only the included Hero Unitool
- ♦ Clean and replace packing, valves and fluid section in 5 minutes to reduce downtime & increase profits

| Model                                  | HOH2K3819S                                     | HOH2K3819C                                    |
|--|--|---|
| <b>Description</b>                     | Hero Airless Electric Paint Sprayer with Stand | Hero Airless Electric Paint Sprayer with Cart |
| <b>Motor</b>                           | 0.6hp, 115v, 8A Single-phase Electric Motor    | 0.6hp, 115v, 8A Single-phase Electric Motor   |
| <b>Pump Type</b>                       | Piston Pump                                    | Piston Pump                                   |
| <b>Feed Type</b>                       | Syphon   | Syphon  |
| <b>Max.Tip Size</b>                    | 0.019  | 0.019   |
| <b>GPM at Max.Tip Size</b>             | 0.38   | 0.38  |
| <b>Max.PSI</b>                         | 3 000  | 3 000   |
| <b>Shipping Dimensions (L x W x H)</b> | 19" x 14" x 15"                                | 22" x 16" x 19"                               |
| <b>Shipping Weight</b>                 | 57 lbs   | 65 lbs  |

## Hero Paint Sprayer Accessories - Make a difference with the right stuff.

### Gun & Hose Kit



| Product No. | Description   |
|-------------|---|
| HO103002    | 2-Finger ASM 300 Gun & 1/4" x 50' ft. Hose Kit with #1710 Reversible Flip Tip |
| HO103004    | 4-Finger ASM 300 Gun & 1/4" x 50' ft. Hose Kit with #1710 Reversible Flip Tip |

### Rental Accessories Package



| Product No. | Description  |
|-------------|--|
| HO4646      | Rental Accessories Package with 3 Gallon Strainer Bag, Plastic Liner, Rubber Band, & Wonder Wash |
| HO4651      | Rental Accessories Package with 5 Gallon Strainer Bag, Plastic Liner, Rubber Band, & Wonder Wash |

### Wonder Wash & Wonder Coat

| Product No. | Description                                     |
|-------------|---|
| HO4649      | Wonder Wash Packets (48 x 1.5 oz. bottles/case) |
| HO4655      | Wonder Wash Packets (25 x 5 oz. packets/case)   |
| HO4660      | Wonder Wash 5lb Bulk Pack                       |
| HO4666      | Wonder Coat 4L Bottle                           |



### Strainer Bags

| Product No. | Description                     |
|-------------|---------------------------------|
| HO3GALSB25  | 3 Gallon Strainer Bags (25/box) |
| HO5GALSB25  | 5 Gallon Strainer Bags (25/box) |

### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

F6

WWW.UNIQUIP.CA

### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

# h vlp paint sprayer & accessories

## Earlex SprayPort HVLP Paint Spraying System - The Essential Rental Paint Spraying System.

### Low Maintenance

- ♦ Easy to clean, hard wearing and non-corrosive Teflon coated spray gun (GUN SOLD SEPARATELY)
- ♦ NEW! Disposable plastic guns available to reduce maintenance time and labour to upkeep unit over each rental

### Versatile

- ♦ 3-Stage turbine motor combined with HVLP technology lets the SprayPort apply multiple spray mediums including varnishes, wood preservatives, enamels, oil and water based paints and cellulose
- ♦ With 95% spray efficiency, thus ensuring less paint wastage and low over spray delivers professional results on large and intricate interior and exterior jobs

### Ergonomic Design

- ♦ Separate hose carrier and main turbine motor unit connect via two quick release clips for easy transportation from vehicle to the job site



Just click apart the quick release clips to separate the carrier & hose from the motor unit.

Ergonomically designed carrier and hose lifts easily!



### WAHV7000

\*Gun sold separately



### WAN0166

### WAN0165

| Model                           | WAHV7000  |
|---------------------------------|---|
| Description                     | Earlex SprayPort HVLP Paint Spraying System   |
| Motor                           | 1100W Three Stage Motor   |
| Motor Type                      | Turbine   |
| Spray Gun Capacity              | 1 Litre   |
| Air Velocity                    | 13.87 mls   |
| Air Pressure                    | 227 mbar  |
| Hose Length                     | 29.5' ft.(9 m)  |
| Shipping Dimensions (L x W x H) | Main Turbine Unit: 15" x 15" x 18"<br>(372 mm x 385 mm x 457 mm)<br>Carrier/Hose: 18" x 20" x 27"<br>(460 mm x 515 mm x 680 mm) |
| Shipping Weight                 | Main Turbine Unit: 29 kg<br>Carrier/Hose: 20 kg   |

| Model       | WAN0166                                    | WAN0165                                      |
|-------------|--|--|
| Description | Earlex Metal Spray Gun for HV700 SprayPort | Earlex Plastic Spray Gun for HV700 SprayPort |
| Capacity    | 1 Litre                                    | 1 Litre                                      |
| Qty/Package | 1  | 1  |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

F7

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

# magnetic core drill

## Fein 50 mm Magnetic Core Drill - Power and precision.

- Innovative**
  - ♦ Innovative QuickIN rapid change chuck system for fast, keyless tool changes
  - ♦ Infinitely variable stroke range setting for fast and safe tool changes without need to remove core drill unit from the tool
  - ♦ Kit includes safety strap, chip hook, coolant/lubricant pumps, 5/8" diam. chuck, B16 adaptor, 2 QuickIN Weldon adaptors, 4 centering pins, set of wrenches, & a carrying case for portability
- Control**
  - ♦ Easy handling due to compact construction and lightweight design
  - ♦ Robust and accurate dual dove-tail guide
- Safe**
  - ♦ High magnetic holding power and safety circuit guarantee safe working in any position
  - ♦ Integral cooling lubricant for clean cutting and long working life

|                                 |  |
|---------------------------------|--|
| <b>Model</b>                    | <b>FIKBM50Q</b>                                    |
| <b>Description</b>              | Fein 50 mm Magnetic Core Drill                     |
| <b>Motor</b>                    | 1200w, 120v Single-phase<br>2-speed Electric Motor |
| <b>Power Output</b>             | 680w   |
| <b>Cable Length</b>             | 4 m  |
| <b>Full Load Speed</b>          | 260/520  |
| <b>Max.Drilling Depth</b>       | 50 mm  |
| <b>Magnetic Holding Power</b>   | 11000 N  |
| <b>Drill Jig Height</b>         | 368 mm   |
| <b>Stroke</b>                   | 135 mm   |
| <b>Total Stroke Range</b>       | 310 mm   |
| <b>Magnetic Foot Dimensions</b> | 180 mm x 90 mm                                     |
| <b>Weight</b>                   | 12 kg  |

### Drilling Capacity in Steel

|                                       |            |
|---------------------------------------|------------|
| <b>Standard Core Drill</b>            | 12 - 50 mm |
| <b>Twist Drill</b>                    | 20 mm      |
| <b>Twist Drill (with drill chuck)</b> | 13 mm      |
| <b>Threaded Drill</b>                 | 16 M       |

### Cutter Kit for FIKBM50Q



|                 |   |
|-----------------|---|
| <b>Model</b>    | <b>FI5530501</b>  |
| <b>Includes</b> | 9/16", 11/16", 13/16", 15/16", &<br>1-1/16" HSS Annular 1" Cutter Set |



**Quick IN**



### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

F8

[www.uniquip.ca](http://www.uniquip.ca)

### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## Fein MultiMaster Select Tool Kit - Limitless versatility.

- Adaptable**
  - Wide oscillation range operate wide variety of accessories to perform multiple tasks
  - Do more with one machine: professional sawing, grinding, scraping, dividing, rough machining, polishing, cutting and much more!
- Control**
  - Variable electronic speed control for sensitive screwdriving applications
  - Lightweight ergonomic design for easy handling and improved control
- Ready to Work**
  - Value kit includes Multimaster rotary unit with electronic speed control, sanding pad, 5 each of 60, 80, 120, & 180 grit sandpaper, 1 rigid stopping knife, 1 E-Cut 35mm saw blade, 1 HSS segment saw blade, 1 carbide segment saw blade, 1 Allen key and mounting bolts

### FIMSXE636IISELECT



| Model                      | FIMSXE636IISELECT                |
|----------------------------|----------------------------------|
| Description                | Fein MultiMaster Select Tool Kit |
| Watts                      | 180 w                            |
| RPM                        | 12000-21000                      |
| Sanding plate above corner | 80 mm                            |
| Cable Length               | 5 m                              |
| Net Weight                 | 1.1 kg                           |



| Accessories for Fein MultiMaster |         |  |   |         |  |
|----------------------------------|---------|--|---|---------|--|
| Product No.                      | Price   |  | Description   | Qty/pkg |  |
| FI63502133017                    | \$36.00 |  | 35 mm x 50 mm Single Row E-Cut Saw Blades                           | 1       |  |
| FI63502134015                    | \$39.00 |  | 65 mm x 50 mm Single Row E-Cut Saw Blades                           | 1       |  |
| FI63502126013                    | \$51.00 |  | 35 mm x 50 mm Double Row E-Cut Saw Blades                           | 1       |  |
| FI63502127017                    | \$56.00 |  | 65 mm x 50 mm Double Row E-Cut Saw Blades                           | 1       |  |
| FI63502151020                    | \$94.00 |  | Bi-Metal E-Cut Blade for Plaster, Cardboard and Synthetic Materials | 3       |  |

# Video pipe inspection system

**Gen-Eye™3**  
Pipe Inspection/Location System

## GWG3-B

[Colour model shown. Available upon request.]

Compact fan-cooled & padded carrying case houses built-in colour TV/VCR and GenEye3 Command Centre for easy access and control.

A built-in 12v DC power inverter allows unit to work off truck battery in the field as well as household AC electricity.

Flexicore cable drives camera through U-Bends easily.

Stainless steel camera housing protects the camera from abrasive surfaces while scratch-resistant sapphire lens delivers crystal clear video close-ups.



## General Wire GenEye3 Pipe Inspection/Location System - Get the Real Picture.

### Precision

- ♦ Video pipe inspection system provides realtime view of plumbing problems for accurate diagnostic and estimation of plumbing problems
- ♦ Super sensitive camera slides through 4" cast iron pipes and 3" ninety degree bends and delivers perfect images in pipe up to 12" in diameter

### Feature-packed

- ♦ All-in-one solution includes sensitive digital locator to precisely identify location of problems, super light sensitive camera, colour TV/VCR combo with microphone & titler/date-time functions to make complete job records with voice-over commentary, all packaged in a rugged plastic rolling case as well as a separate reel with 200'ft of Flexicore wire-rope reinforced push-rod cable

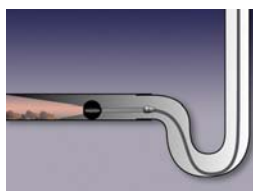

Slide-out handles and wheels for easy transportation.

4-way built-in signal finder works in 3 frequencies to connect to GenEye3 camera or to locate underground power lines for safe digging.



Large reel cage includes 200' ft aircraft wire-rope reinforced Flexicore push rod to get you deep into the plumbing.

| Model                              | GWG3-B   |
|------------------------------------|--|
| Description                        | General Wire GenEye3 Black & White Pipe Inspection/Location System |
| Power Requirements:                | 110v, 60 Hz AC/12v DC  |
| Max.Distance                       | 200' ft.   |
| Max.Depth                          | 350' ft.   |
| Camera Resolution                  | 380 (H) x 380 (V)  |
| Camera Pixels                      | 512 (H) x 492 (V)  |
| Camera Dimensions (W x L)          | 1.68" x 1.87"  |
| Reel & Frame Dimensions L x W x H) | 25.5" x 12" x 33"  |
| TV/VCR Case Dimensions (L x W x H) | 20" x 16" x 20"  |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

F10

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221


# Specialty drain cleaning equipment

## General Wire Kinetic Water Ram- Open Clogged Pipes with Shock Action!

**GWKR-A-WC**

- Forceful**
- ♦ Blast through rust, grease, sediment & scale for instant drain cleaning without using harmful chemicals or costly plumbers
  - ♦ Self-contained pump and pressure gauge lets you hit stoppage with just the right amount of force with no pressure build-up in pipe system to potentially damage plumbing
- Easy-to use**
- ♦ Compact & lightweight stainless steel construction for easy cleaning and durability
  - ♦ Metal carrying case included for portability
  - ♦ Equipped with Schraeder valve for use with external air compressor for clearing difficult stoppages

|                             |   |
|-----------------------------|---|
| <b>Model</b>                | <b>GWKR-A-WC</b>  |
| <b>Description</b>          | Kinetic Water Ram   |
| <b>Cylinder</b>             | 16 gauge plated cylinder                                      |
| <b>Max. Pressure</b>        | 600 lbs   |
| <b>Pressure Gauge</b>       | 160 lbs gearless pressure gauge                               |
| <b>Standard Accessories</b> | Caulking hose, 4" Tapered Rubber Cone, 5 Tapered Rubber Plugs |
| <b>Working Weight</b>       | 20 lbs  |
| <b>Shipping Weight</b>      | 25 lbs  |

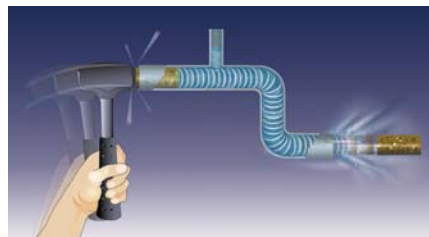

Compressed air creates shock wave of kinetic energy by hitting column of water in clogged pipe to knock out the stoppage.




## General Wire Hot Shot Pipe Thawer- Dethaw your pipes.

- Effective**
- ♦ Electrical powered Hot-Shot pipe thawer eliminates hazardous blow torches or costly excavations to fix frozen pipes
  - ♦ Plug into any 115v receptacle and attach pipe clamps to frozen pipe to get the pipe flowing freely in minutes
- Safe**
- ♦ 20A circuit breaker and thermal overload protection for added safety
  - ♦ CSA-approved to meet stringent safety standards
  - ♦ 20' ft. #1 cables and lugs included to work up to 100' ft. x 1.5" pipes



**GWCHS-300**

|                               |                          |
|-------------------------------|--------------------------|
| <b>Model</b>                  | <b>GWCHS-300</b>         |
| <b>Description</b>            | Hot-Shot 300 Pipe Thawer |
| <b>Output Current</b>         | 325A with 17A draw       |
| <b>Max. Range</b>             | 100' ft x 1.5" lines     |
| <b>Dimensions (L x W x H)</b> | 12" x 12" x 12"          |
| <b>Shipping Weight</b>        | 70 lbs                   |

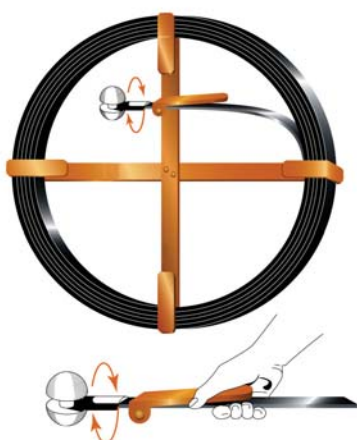

**GW100H**

## General Wire Flat Sewer Rod - Cuts through the grime.

- Tough**
- ♦ Oil-tempered spring steel flat sewer tape will not kink
  - ♦ Rust-ban coating extends working life
  - ♦ 100' ft. x 0.5" x 0.125" ideal for going through 2"-4" pipes
- Simple**
- ♦ Rod is bolted to the holder in 4 points to stop it from springing out while engaged
  - ♦ Quick-Grip handle makes work go faster
  - ♦ Roller-head cuts through clogs quickly

|                               |                        |
|-------------------------------|------------------------|
| <b>Model</b>                  | <b>GW100H</b>          |
| <b>Description</b>            | 100' Flat Sewer Rod    |
| <b>Working Rod Dimensions</b> | 100' L x 0.5" x 0.125" |
| <b>Shipping Weight</b>        | 22 lbs                 |

**English Assistance**

(T) 1.888.332.4012 (F) 1.866.567.0956

**F11**

**WWW.uniquip.ca**

**French Assistance**

(T) 1.800.332.4012 (F) 1.866.825.2221

## General Wire SpeedRouter 91 & Easy-Router - Heavy-duty Rooting Action.

### Shared Quality Components for Performance

- ♦ Capacitor-start GFCI protected motor with thermal protection overload and pneumatic on/off foot switch for safe operation
- ♦ Quickly switch between large & small drums on the jobsite to suit project needs
- ♦ GWSRCS cutter set with various cutters, retrieving tool and flexible leader included to help you cut through roots or any other major drain blockage easily and quickly
- ♦ Extra long plated handle quickly locks into place to easily wheel roter from place to place on 10" ball-bearing pneumatic wheels

### SpeedRouter91

- ♦ Ideal for work in 2" - 10" lines with heavy blockage issues
- ♦ Powerful 1/2 hp electric motor cuts through major blockages from sediment & roots efficiently
- ♦ Variable speed power cable feed drives 3/4", 5/8" & 1/2" cables in and out of long lines and tough sediment buildup without reversing motor rotation for extended motor life
- ♦ Easily switch to different cables by turning knob with included screwdriver
- ♦ Tool box stored in the back for convenient access to the right tools for the job
- ♦ Adjustable height handle allows user to set unit to preferred height
- ♦ Rugged frame design supports drum front and back as well as braced at key stress points for longer bearing wear
- ♦ Swept-back handle and loading wheel on handle makes it easy for one person to quickly load unit for transportation

### Easy-Router

- ♦ Choose the Easy-Router for 3" - 10" diameter lines
- ♦ Ideal for floor drains, main sewer lines & septic tanks
- ♦ Large zinc-plated cage holds 100'ft of factory-standard 3/4" or optional 5/8" Flexicore cable
- ♦ Rugged powder-coated steel-frame with roll bars protect motor and heavy-duty roller bearings in the cage for longer life & greater motor efficiency on long runs



**GWPS91-C**



**GWG-ER-D**



**GWG-MR-D-O**

## General Wire Mini-Router - Gives you light weight with a long reach.

### Compact & Economical

- ♦ Economical, lightweight machine includes many time-saving features
- ♦ GWMRCS cutter set with various cutters, arrow head drill and boring gimlet to get through smaller blockages
- ♦ High-impact plastic guard protects motor pulley on GFCI protected motor with thermal protection overload and pneumatic on/off foot switch for safe operation

| Model  | GWPS91-C  | GWG-ER-D                                  | GWG-MR-D-O                              |
|--|---|---|---|
| Description                                  | Speedrouter 91 Heavy-Duty Electric Rooter       | Easyrouter Contractor-use Electric Rooter | Minirooter Professional Electric Rooter |
| Motor  | 1/2 hp  | 1/3 hp                                    | 1/3 hp                                  |
| Recommended for use in pipe sizes:           | 2" - 10"  | 3" - 10"                                  | 1.25" - 3"                              |
| Maximum Capacity:                            | 100' ft for use with 1/2", 3/4", or 5/8" Cables | 100' ft. x 3/4" or 5/8" Cables            | 75' ft x 1/2" or 3/8" Cables            |
| Maximum Recommended Distance                 | 200' ft   | 100' ft                                   | 75' ft                                  |
| Working Weight (with factory standard cable) | 239 lbs   | 186 lbs                                   | 51 lbs                                  |
| Includes Cutter Set                          | GWSRCS  | GWSRCS                                    | GWMRCS                                  |
| Shipping Weight                              | 242 lbs   | 197 lbs                                   | 79 lbs                                  |

## General Wire Super-Vee - The Small Drain Specialist.

- Portable**
  - ♦ Hand-held drain auger ideal for sinks, laundry tubs & small drains up to 3" in diameter
  - ♦ Reversible motor with variable speed control system to drive cable in and out of drains easily
  - ♦ GWHECS 5-piece Cutter Set includes arrow head drill, cutters & boring gimlets for small drains
- Easy-to-use**
  - ♦ Slide action chuck design allows for quick, controlled release or engagement of cable
  - ♦ Unique Grip Shield automatically adjusts for different cable diameters for versatility
- Low-maintenance**
  - ♦ Quick-Change Cable Cartridges turns messy and time-consuming maintenance into a clean and fast operation
  - ♦ Heavy gauge container with inner drum prevents cable tangling



**GWSV-B-WC**

| Model   | GWSV-B-WC   |
|---|---|
| <b>Description</b>                                  | Super-Vee Hand-held Electric Auger                            |
| <b>Motor</b>  | Single-phase, 115 v, 3.2A                                     |
| <b>Recommended for use in pipe sizes:</b>           | 1.25" - 3"  |
| <b>Maximum Capacity:</b>                            | a) 35' ft. x 3/8" in.<br>b) 50' ft. x 5/16" in. or x 1/4" in. |
| <b>Maximum Recommended Distance</b>                 | 50' ft.   |
| <b>Working Weight (with factory standard cable)</b> | 16 lbs  |
| <b>Includes Cutter Set:</b>                         | GWHECS  |
| <b>Shipping Weight</b>                              | 35 lbs  |



**GWX550-EM3-C**

**GWX575-EM3-C**

**GWX5100-EM3-C**

## General Wire Manual Augers - For the Do-it-Yourselfer

- Spin-drive:**
  - ♦ Lightweight easy-to-operate manual drain cleaner for 2" - 4" lines
  - ♦ Available in 50', 75' & 100' lengths
- Closet Auger:**
  - ♦ Telescopic guide tube stores 3' of cable & releases on demand to 6' ft. full length for controlled results
  - ♦ Constructed from quality materials for optimal weight (6 lbs) & durability
- Hand-held Auger:**
  - ♦ Patented collet chuck tightens firmly on cable with just a 1/4-turn
  - ♦ Durable steel container

| Model                                    | GW25-3-A  | GWT6FL                     | GWX550-EM3-C                   | GWX575-EM3-C                   | GWX5100-EM3-C                   |
|--|---|----------------------------|--------------------------------|--------------------------------|---------------------------------|
| <b>Description</b>                       | Hand-held Manual Auger  | 6' ft. Manual Closet Auger | SpinDrive 50' ft. Manual Auger | SpinDrive 75' ft. Manual Auger | SpinDrive 100' ft. Manual Auger |
| <b>Recommended for use in pipe sizes</b> | 1.25" - 3"  | Toilets                    | 2" - 4"                        | 2" - 4"                        | 2" - 4"                         |
| <b>Maximum Capacity</b>                  | a) 35' ft. x 3/8" in.<br>b) 50' ft. x 5/16" in. or 1/4" in. cable | 6' ft.                     | 50' ft x 1/2" in.              | 75' ft. x 1/2" in.             | 100' ft x 1/2" in.              |
| <b>Maximum Recommended Distance</b>      | 50' ft.   | N/A                        | 50' ft.                        | 75' ft.                        | 100' ft.                        |
| <b>Standard Working Weight</b>           | 15 lbs  | 6 lbs                      | 41 lbs                         | 54 lbs                         | 67 lbs                          |
| <b>Shipping Weight</b>                   | 17 lbs  | 7 lbs                      | 46 lbs                         | 60 lbs                         | 75 lbs                          |



# ssorted manual augers and accessories for sewer augers

## General Wire Manual Augers - For the Do-it-Yourselfer

### Closet Auger

- ♦ Telescopic guide tube stores 3' of cable & releases on demand to 6' ft. full length for controlled results
- ♦ Constructed from quality materials for optimal weight (6 lbs) & durability

### Hand-held Auger

- ♦ Patented collet chuck tightens firmly on cable with just a 1/4-turn
- ♦ Durable steel container



**GW25-3-A**



**GWT6FL**

| Model                             | GW25-3-A   | GWT6FL                     |
|-----------------------------------|--|----------------------------|
| Description                       | Hand-held Manual Auger   | 6' ft. Manual Closet Auger |
| Recommended for use in pipe sizes | 1.25" - 3"   | Toilets                    |
| Maximum Capacity                  | a) 35' ft. x 3/8" in.<br>b) 50' ft. x 5/16" in.<br>or 1/4" in. cable | 6' ft.                     |
| Maximum Recommended Distance      | 50' ft.  | N/A                        |
| Standard Working Weight           | 15 lbs   | 6 lbs                      |
| Shipping Weight                   | 17 lbs   | 7 lbs                      |

## Accessories for Sewer Augers- For a clean & professional finish




### General Wire 4L Snake Oil

#### Model

**GWSOG**




#### Use for

- ♦ Cleans, disinfects & refreshes drain cleaning equipment
- ♦ Coats cables with rust inhibitor & protectant to maintain cable performance and extend durability

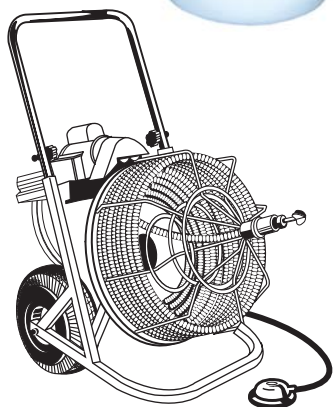

### Replacement Cables for General Wire Rooters


| Product No. | Description           |
|-------------|-----------------------|
| GW100EM5    | 100' ft. x 3/4" Cable |
| GW100EM3    | 100' ft. x 1/2" Cable |
| GW75EM3     | 75' ft. x 3/4" Cable  |
| GW50EM3     | 50' ft. x 1/2" Cable  |
| GW35HE2     | 35' ft. x 3/8" Cable  |
| GW25HE1     | 25' ft. x 1/4" Cable  |

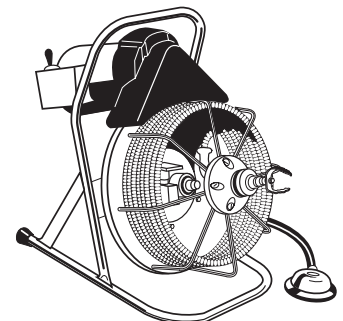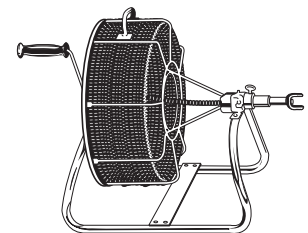

### Flexichain, Proflex Cable & Flexible Leader Sections

#### Product No.

GW8GP  
GW10GP  
GW8LP  
GW10LP  
GWLE-1  
GWLE-2

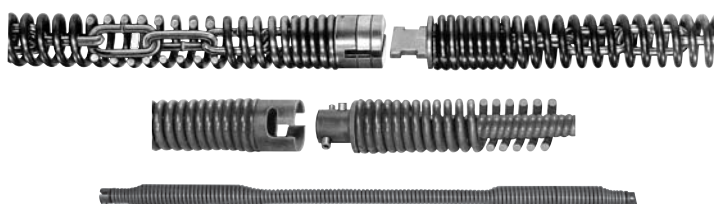

#### Description

8' ft. Flexichain Section  
10' ft. Flexichain Section  
8' ft. Proflex Section  
10' ft. Proflex Section  
13" Flexible Leader  
33" Flexible Leader

### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

**F14**
























**WWW.uniquip.ca**

### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221



# Accessories for sewer augers

| General Wire Cutters |   |                           | Use for Cable Sizes: |      |      |      |      | Available as part of Cutter Set: |        |        |
|----------------------|---|---------------------------|----------------------|------|------|------|------|----------------------------------|--------|--------|
| Product No.          |   | Description               | 5/16"                | 3/8" | 1/2" | 5/8" | 3/4" | GWMRCS                           | GWSRCS | GWHECS |
| GWAH                 |    | Arrow Head Starting Drill | ✓                    | ✓    | ✓    |      |      | ✓                                |        | ✓      |
| GWSHD                |    | Spear Head Starting Drill |                      |      |      | ✓    | ✓    |                                  | ✓      |        |
| GW1/4DH              |    | Down Head                 |                      |      |      |      | ✓    |                                  |        |        |
| GWDHF                |    | Down Head Fitting         | ✓                    | ✓    |      |      |      |                                  |        |        |
| GWFAH                |    | Flexible Arrow Head       | ✓                    | ✓    |      |      |      |                                  |        | ✓      |
| GWDHBG               |    | Down Head Boring Gimlet   | ✓                    | ✓    |      |      |      |                                  |        | ✓      |
| GWBG                 |    | Boring Gimlet             | ✓                    | ✓    |      |      |      | ✓                                |        | ✓      |
| GWRT-1               |    | Corkscrew Retrieving Tool |                      | ✓    | ✓    |      |      |                                  |        |        |
| GWRT-2               |    | Corkscrew Retrieving Tool |                      |      |      | ✓    | ✓    |                                  | ✓      |        |
| GWRP-2               |    | Root Ripper               |                      |      |      | ✓    | ✓    |                                  |        |        |
| GW1 1/2UC            |   | 1-1/2" U-Cutter           |                      |      |      |      |      | ✓                                |        |        |
| GW2UC                |    | 2" U-Cutter               |                      |      | ✓    | ✓    | ✓    |                                  | ✓      |        |
| GW3UC                |    | 3" U-Cutter               |                      |      |      | ✓    | ✓    |                                  |        |        |
| GW4UC                |   | 4" U-Cutter               |                      |      |      | ✓    | ✓    |                                  |        |        |
| GW3HDSC              |  | 3" Heavy-Duty Side Cutter |                      |      |      | ✓    | ✓    |                                  | ✓      |        |
| GW4HDSC              |  | 4" Heavy-Duty Side Cutter |                      |      |      | ✓    | ✓    |                                  |        |        |
| GW1 1/4SCB           |   | 1-1/4" Side Cutter Blade  | ✓                    | ✓    | ✓    |      |      |                                  |        | ✓      |
| GW2SCB               |  | 2" Side Cutter Blades     |                      |      | ✓    | ✓    | ✓    | ✓                                |        |        |
| GW3SCB               |  | 3" Side Cutter Blades     |                      |      | ✓    | ✓    | ✓    |                                  | ✓      |        |
| GW4SCB               |   | 4" Side Cutter Blades     |                      |      | ✓    | ✓    | ✓    |                                  | ✓      |        |
| GW3RSB               |  | 3" Rotary Side Blades     |                      |      | ✓    | ✓    | ✓    |                                  |        |        |
| GW4RSB               |  | 4" Rotary Side Blades     |                      |      | ✓    | ✓    | ✓    |                                  | ✓      |        |
| GW3HDB               |  | 3" Heavy-Duty Saw Blades  |                      |      |      | ✓    | ✓    |                                  |        |        |
| GW4HDB               |  | 4" Heavy-Duty Saw Blades  |                      |      |      | ✓    | ✓    |                                  |        |        |
| GW1/2QF              |   | Quick-Fix' Repair Coupler |                      |      | ✓    |      |      |                                  |        |        |
| GW5/8QF              |  | Quick-Fix' Repair Coupler |                      |      |      | ✓    |      |                                  |        |        |
| GW3/4QF              |   | Quick-Fix' Repair Coupler |                      |      |      |      | ✓    |                                  |        |        |
| GW5/16H-FC           |   | Cup-type Connector        | ✓                    |      |      |      |      |                                  |        |        |
| GW3/8FC              |  | Cup-type Connector        |                      | ✓    |      |      |      |                                  |        |        |
| GW1/2FC              |   | Cup-type Connector        |                      |      | ✓    |      |      |                                  |        |        |
| GW3/8RS              |   | Repair Sleeve             |                      | ✓    |      |      |      |                                  |        |        |
| GW1/2RS              |   | Repair Sleeve             |                      |      | ✓    |      |      |                                  |        |        |
| GW5/8RS              |  | Repair Sleeve             |                      |      |      | ✓    |      |                                  |        |        |
| GW3/4RS              |   | Repair Sleeve             |                      |      |      |      | ✓    |                                  |        |        |



**BR57-LMH600-PKG**

## CST-Berger Electronic Self-Leveling Dual Beam Rotary Laser Kit - All-around Precision

- Versatility**
- ♦ Dual-beam 635nm visible red laser diode for both horizontal & vertical plumb
  - ♦ Dual axis manual grade up to 10% on level surfaces
  - ♦ Clockwise & counter-clockwise head positioning for fast and easy alignment in vertical/horizontal applications

- Clarity**
- ♦ Variable speed rotation for maximum visibility in any light condition
  - ♦ Preset angles of 10°, 45°, 90°, and 180° to increase beam visibility
  - ♦ Working range up to 1 000' ft. in diameter & 2 000' ft. with laser detector (LD400 model included)

- Performance**
- ♦ Complete kit included LD400 laser locator to expand working range, C-mount ceiling/wall mount and grid target for accurate drop ceiling installations, & remodelling, and laser glasses to improve visibility under bright conditions or over long distances
  - ♦ Aluminium tripod included for stability and bayonet aluminium laser rod with clearly marked, non-erasable graduations for easy, accurate readings



**BR57-LMHCPK**

## CST-Berger Electronic Self-Leveling Laser Kit - For fast, accurate leveling

- Simple**
- ♦ Single beam offers 600 RPM rotation for optimal use with laser detector (LD100N included)
  - ♦ Self-levels via electronic sensors interfaced with motors, eliminating manual leveling screws of bubbles
- Jobsite-tough**
- ♦ Heavy-duty glass enclosed beacon & durable sealed water housing give water & dust resistance for long-term reliability
  - ♦ Kit includes LD100N laser locator, aluminium tripod & leveling rod

## CST-Berger Accessories for Self-leveling Lasers - Expand your horizons.

### Ceiling/Wall Mount

- ♦ Aids in the installation of drop ceilings, remodelling & other contractor applications
- ♦ 5/8" x 11 mounting stud, inch/cm graduations all held together by durable construction

### Grid Target

- ♦ Attaches to metal studs or t-bars to target & focus
- ♦ Magnetic base for attachment to metal studs or drop ceiling t-bars, with inch/cm graduations

### BR57-TARGET



### BR57-CMOUNT

| Model                      | BR57-LMH600-PKG  | BR57-LMHCPK  |
|----------------------------|--|--|
| <b>Description</b>         | CST-Berger LMH600 Contractor-use Rotary Laser Kit  | CST-Berger LMH Professional Rotary Laser Kit   |
| <b>Laser Diode</b>         | 635nm "High-Power" Diode   | 650nm  |
| <b>Levelling Axis</b>      | Electronic Horizontal & Vertical Self-leveling   | Electronic Horizontal Self-leveling  |
| <b>Levelling Accuracy</b>  | +/- 1/8" in. @ 100' ft.  | +/- 3/32" in. @ 100' ft.   |
| <b>Working Range</b>       | up to 1 000' ft. diameter<br>(2 000' ft. with LD400 Locator)                                 | up to 2 000' ft. diameter<br>(2 000' ft. with LD400 Locator)                                 |
| <b>Speed Rotation</b>      | Variable adjustment to working conditions  | 600 rpm  |
| <b>Working Environment</b> | All-weather construction needs from -6°C to 49°C   | All-weather construction needs from -6°C to 49°C   |
| <b>Power Requirements</b>  | a) 4 'D' cell alkaline batteries for +/- 75 hrs<br>b) Rechargeable battery pack for 30+ hrs. | a) 4 'D' cell alkaline batteries for +/- 75 hrs<br>b) Rechargeable battery pack for 30+ hrs. |



## CST-berger Speed Line Transit Level Kit - Top quality design for reliability & durability.

- Accuracy**
  - Rough angle turning & fine tuning adjustments allow for precise measuring
  - 20x 15 minute horizontal circle & 1° vertical arc combine to allow for rough angle settings
  - Clamps & tangents bring your instrument quickly on target
- Quality**
  - One-piece aircraft aluminium telescope for lightweight operation and durability
  - Stainless steel sliding lock lever locks telescope
  - Quality & tough components combine for accuracy & durability
- Rugged Design**
  - Custom hard-shell carrying case protects laser from transport damage
  - Aluminium quick clamp tripod & 8' ft. telescoping aluminium rod included

### BR200BOUTFIT

## CST-berger SAL 'N' Series Automatic Level Kit - Save time & money on every job!

- Precision**
  - Magnetically dampened, wire-hung compensator for optimum range & accuracy
  - Large & effective aperture with minimum focus of 1' ft.
  - Fine motion knobs on both sides with friction-braked rotation and endless horizontal drive
- Easy-to-use**
  - Top-mounted optical peep-sight for quick reference
  - Easy-to-read horizontal circle
  - Right angle prism for easy bubble viewing
  - 1:1000 stadia for distance estimation
- Value-packed**
  - Water-resistant, sealed construction with sunshade for use in various weather conditions
  - Compensator lock protects laser during transport or storage as well as acting as a handy compensator checking tool
  - Includes hard shell carrying case with dual latches, lens cover, plumb bob, Allen wrench, adjusting pin, aluminium tripod & levelling rod for instant operation



### BR55-SLVP24ND

| Model   | BR200BOUTFIT                              | BR55-SLVP24ND                         |
|---|---|---------------------------------------|
| <b>Description</b>  | CST-Berger Speed Series Transit Level Kit | CST-Berger SAL"N" Automatic Level Kit |
| <b>Magnification</b>                                      | 20x                                       | 24x                                   |
| <b>Horizontal Angle</b>                                   | 15°                                       | 1°                                    |
| <b>Vertical Angle</b>                                     | 1°  | N/A                                   |
| <b>Levelling Accuracy</b>                                 | +/- 1/4" in. @ 100' ft.                   | +/- 1/16" in. @ 150' ft.              |
| <b>Working Range</b>                                      | up to 200' ft. diameter                   | up to 300' ft. diameter               |
| <b>Clear Objective Aperture</b>                           | N/A                                       | 36 mm                                 |
| <b>Compensator Setting Accuracy</b>                       | N/A                                       | +/-0.8°C                              |
| <b>Standard Deviation (for 1 km Double-run Levelling)</b> | N/A                                       | 2.0 mm                                |
| <b>Shipping Weight</b>                                    | 65 lbs                                    | 60 lbs                                |

## CST-berger Magnetic Locator - Get to know your terrain.

- Control**
  - Detect metal blockages or locate structures quickly & effectively
  - Manual controls allow user to 'erase' magnetic disturbances such as fences & set sensitivity levels for precise readings
- Portability**
  - Includes carrying case & low battery indicator in a 3 lb package for portability

| Model                                | BR19-557                    |
|--------------------------------------|-----------------------------|
| <b>Description</b>                   | CST-Berger Magnetic Locator |
| <b>Typical Object Depth Capacity</b> |                             |
| 1.5" Nail                            | up to 8" in                 |
| Cast Iron Pipe                       | up to 8' ft                 |
| Manhole Cover                        | up to 8' ft                 |
| Large Iron Tank                      | up to 15' ft.               |



# C onstruction material hoist & wall jack

## Construction Material Hoist - Reach for the Roof.

### Saves time & money

- ♦ Save time & money by turning a complicated lifting task into a simple single operator procedure
- ♦ Hoist shingles, felt, insulation, plywood and other materials up to 27' feet (43' maximum height with additional extensions)

### User-friendly

- ♦ Ball bearing winch and platform for smooth operation and low maintenance
- ♦ Disassembles into small, easily transportable pieces without the use of heavy equipment

### Heavy-duty

- ♦ Operates on 100 ft' of aircraft cable and quality 3.5 hp Briggs & Stratton engine
- ♦ Heavy-duty splice plate braces and steel construction combine for rigidity and durability on jobsites

| Model                   | RE123  |
|-------------------------|--|
| Description             | Construction Materials Hoist                           |
| Engine                  | 3.5 hp Briggs & Stratton                               |
| Lifting Capacity        | 200 lbs  |
| Standard Working Height | 27' ft<br>(1 x 8' base section & 3 x 8' ft extensions) |
| Maximum Working Height  | 43' ft. with optional extensions                       |
| Shipping Weight         | 200 lbs  |

Lift materials from the ground to the roof!



### RE123



Briggs engine delivers reliable power to lift supplies to where you need them.

### Accessories for RE123 Safety Roof Hoist

| Product No. | Description                  |
|-------------|------------------------------|
| RE123-C     | Unloading Ramp               |
| RE123-8A    | Gravel Hopper                |
| RE123-5     | 8' Extension                 |
| RE123-9A    | Support Brace for Extensions |

## Contractor-tough Wall Jack - Raise the Wall.

### Increased Efficiency

- ♦ Single person operation to raise 9' to 10' walls for increased efficiency and reduced labour costs
- ♦ Ergonomic design reduces worker fatigue

### Rental-tough

- ♦ Heavy-duty 2-speed winch with convertible speed system for better operator control
- ♦ Combination of aluminium and steel construction for lightweight operation and durability
- ♦ Tough nylon strap with hook and lifting bracket for easy maintenance

| Model            | REL1155                      |
|------------------|------------------------------|
| Description      | 1000 lb Contractor Wall Jack |
| Lifting Capacity | 1000 lbs                     |
| Working Length   | 8' ft. to 14' ft.            |
| Shipping Weight  | 60 lbs                       |



### REL1155-10



Single operator design optimizes time & money.

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

F18

www.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221



## Knock-Down Hoist - Lift up!

- Handy:**
- ♦ 52" boom long reach lift
  - ♦ Lifts up to 7.25' ft.
- User Friendly:**
- ♦ Handles up to 1500 lbs for most common uses
  - ♦ Easy to stow and simple to set-up!

| Model                          | BBPB1500                 |
|--------------------------------|--------------------------|
| Description                    | 1500 lb Knock-Down Hoist |
| Capacity                       | 1500 lbs                 |
| Boom Length                    | 52"                      |
| Min.Height                     | 32"                      |
| Max.Height                     | 87"                      |
| Working Dimensions (L x W x H) | 65" x 41" x 65"          |
| Weight                         | 235 lbs                  |



**BBPB1500**

## Assorted Lifting & Moving Tools - Save your back.

- Suction Cup:**
- ♦ Large 8" suction cup safely lifts up to 125 lbs/cup
  - ♦ Ideal for appliances, panes of glass, & so much more
- Hydraulic Bottle Jack:**
- ♦ 20 ton lifting capacity lifts from 9-3/8" to 18-5/8"
  - ♦ Fine-tune lifting height with adjustable platform
- Appliance Cart:**
- ♦ 60" cart
  - ♦ 800 lbs lifting capacity for appliances or furniture
  - ♦ Available in either ratchet or cam type

### Suction Cup



| Model            | PGN4000     |
|------------------|-------------|
| Suction Surface  | 8" diameter |
| Lifting Capacity | 125 lbs     |
| Shipping Weight  | 4 lbs       |

### Hydraulic Bottle Jack



| Model            | REJACK20          |
|------------------|-------------------|
| Working Height   | 9-3/8" to 18-5/8" |
| Lifting Capacity | 20 ton            |
| Shipping Weight  | 25 lbs            |

### Appliance Carts



Cam-type  
UT1289 shown

| Model            | UT1284                    | UT1289                  |
|------------------|---------------------------|-------------------------|
| Description      | Ratchet Type Utility Cart | Cam Type Appliance Cars |
| Working Height   | 60" in.                   | 60" in.                 |
| Lifting Capacity | 800 lbs                   | 800 lbs                 |
| Shipping Weight  | 45 lbs                    | 45 lbs                  |

## Kartote Industrial Strength Tow Dollies - Built Tough for Years of Service!

- Tough**
  - ♦ Heavy-duty steel construction with hot-dip galvanized tow bar for rust-resistance & low maintenance
  - ♦ Mag-style wheels with radial tires for a smooth, controlled ride with added strength & style
- Secure**
  - ♦ Extra towing chains ensure that the towed vehicle is safely secured
  - ♦ Safety light bar provides extra measure of safety & visibility for vehicle in tow
- Performance**
  - ♦ Henschen rubber torsion axles absorbs shock and hugs road for better handling
  - ♦ Surge brake eliminates the need for special tow vehicle brake wiring



### FKKT-200IS

Kartote does the job of a tow truck without the high cost.



| Model                    | FKKT-200IS                |
|--------------------------|---------------------------|
| Description              | Kartote 2775 lb Tow Dolly |
| Overall Length           | 142"                      |
| Overall Width            | 102"                      |
| Height at Fender         | 32"                       |
| Weight (empty)           | 725 lbs                   |
| Axle Capacity            | 3 500 lbs                 |
| Coupler Size             | 1-7/8", 50 mm, 2"         |
| Ground Clearance         | 5.5"                      |
| Tire Size and load Range | ST205/75R14               |
| Coupler Classification   | SAE1, 2, 3                |
| Tow Vehicle Width        | Min. = 39", Max. = 77"    |
| GAWR                     | 3 500 lbs                 |
| GVWR                     | 3 500 lbs                 |
| Maximum Load             | 2 775 lbs                 |
| Shipping Weight          | 1 500 lbs                 |

## Master Heat Gun - Blast it.

- Adaptable**
  - ♦ High temperature ideal to bend plastics, cure adhesives and other construction applications
- Durable**
  - ♦ Metal die-cast construction & ceramic heating element for durable performance

| Model                  | HG751                                  |
|------------------------|--|
| Description            | Master Appliance Professional Heat Gun |
| Motor                  | 1740w, 120V, 14.5A                     |
| Air Flow               | 23 CFM at 3000 FPM                     |
| Nozzle Opening         | 1.2" diameter                          |
| Temperature Range      | 400° - 540°C,<br>750° - 1000°F         |
| Dimensions (L x W x H) | 9" x 5.2" x 10.1"                      |
| Working Weight         | 3.7 lbs                                |
| Shipping Weight        | 5 lbs                                  |



### HG751



**ENAR24HC**



Handle folds over into convenient travel position for easy transportation and storage.



Comfortably lift aerator up into minivan or truck with large lifting handles.



4 sets of contractor-tough spring steel coring teeth wheels deliver even and penetrating results.

| Model                           | ENAR24HC                         |
|---------------------------------|----------------------------------|
| Description                     | Endura 5.5hp Aerator             |
| Engine                          | 5.5 hp Honda GX160 OHV           |
| Aerating Width                  | 17.5" in.                        |
| Aerating Depth                  | Variable adjustment up to 3" in. |
| Aerating Pattern                | 4.4" x 7.8"                      |
| Working Dimensions (L x W x H)  | 48" x 26.5" x 49.5"              |
| Net Weight                      | 265 lbs                          |
| Shipping Dimensions (L x W x H) | 40" x 26.5" x 28"                |
| Shipping Weight                 | 300 lbs                          |

## Endura Professional Gas-powered Aerator - Let your lawn breathe

### Contractor-tough

- ♦ Full-steel body construction protects against jobsite abuse
- ♦ Hammered-finish powder-coat paint adds resistance to scratching, rusting and other common jobsite damage

### Professional Results

- ♦ Four sets of 6 spring-steel coring tines deliver professional aerating results

### Powerful

- ♦ 5.5 hp gas engine powers through tough soils for thorough aeration

### Portable

- ♦ Large lifting handles lets you move unit quickly and safely from place to place
- ♦ Handle folds over aerator into compact position for easy storage and transportation

## Endura Professional Gas-powered Lawn Comber - Dethatch and reveal a stronger lawn

- Capacity**
  - Optimally sized for efficient dethatching of any lawn
  - 5.5 hp gas engine drives lawn comber through thick thatches
- Strength**
  - Steel-body construction delivers durability and rugged protection
  - Spring-steel flails offer strength and flexibility for optimal dethatching
- Cost-effective**
  - Increase efficiency and performance with powerful engine
  - Quality parts and construction combine for low-maintenance and increased working time

| Model                           | ENLC52HC                               |
|---------------------------------|--|
| Description                     | Endura 5.5hp Lawn Comber               |
| Engine                          | 5.5 hp Honda GX160 OHV                 |
| Delta Blades                    | 20 tempered spring-steel flails        |
| Combing Width                   | 18" inch                               |
| Depth Adjustment                | 8 preset heights @ 1/4" in. increments |
| Working Dimensions (L x W x H)  | 40.5" x 26.75" x 36.5"                 |
| Net Weight                      | 138 lbs                                |
| Shipping Dimensions (L x W x H) | 34.5" x 26.75" x 26.5"                 |
| Shipping Weight                 | 160 lbs                                |

Unit folds over for compact storage and transportation.



Bring the complete lawn care solution home in a van!



Spring-steel flails cuts through and loosens thatch to renew the lawn.



**ENLC52HC**



## Endura Professional Gas-powered Trencher - Simple. Aggressive. Reliable.

### Strong

- ♦ Powered by 5.5hp Honda GX160 OHV gas engine for power and reliability
- ♦ Tough steel body construction withstands rigorous jobsite use
- ♦ Powder-coated for added rust and scratch resistance

### Easy to Use

- ♦ Handy depth adjustment handle lets operator change trenching depths from 0" to 18"
- ♦ Chain tensioner allows operator to adjust chain tension to suit jobsite conditions for optimal trenching results and extra chain durability
- ♦ Balanced design lets operator easily maneuver trencher for smooth and controlled digging

### Designed for Professionals

- ♦ Side auger shifts soil and debris away from digging bar for a clear view of digging area and clean trench
- ♦ Aggressive digging chain comprised of independently linked carbide teeth for easy onsite service and replacement
- ♦ Just grease zerks regularly for low maintenance, performance and increased work life



Dig through the toughest conditions up to 18" with new and improved trenching chain.

| Model                           | ENTR21H                   |
|---------------------------------|---------------------------|
| Description                     | Endura 5.5hp 18" Trencher |
| Engine                          | 5.5 hp Honda GX160 OHV    |
| Trenching Depth                 | up to 18"                 |
| Trenching Width                 | 3"                        |
| Working Dimensions (L x W x H)  | 4.5' x 2' x 4'            |
| Net Weight                      | 315 lbs                   |
| Shipping Dimensions (L x W x H) | 4.5' x 4' x 4.3'          |
| Shipping Weight                 | 350 lbs                   |

## ENLS20H

The ENLS20H easily changes from horizontal to vertical working position to split logs in both directions

Tough and powerful hydraulic system delivers fast repetitive force.

Transport Canada approved roadworthy design and lighting system.

Sturdy ball hitch and chain system hooks up to your vehicle to go anywhere.

## Gas-powered Hydraulic Logsplitter - For strength and performance

### Strength

- ♦ Heavy-duty tubular frame construction for rugged applications
- ♦ Powered by Honda GX-series engines for tough contractor performance

### Mobility

- ♦ Ball-hitch and safety chains included for added security in transport
- ♦ Road-worthy design allows woodsplitter to be towed on highways with you to move from site to site

### Performance

- ♦ Quality hydraulic system delivers forceful woodsplitting capabilities
- ♦ Converts easily from horizontal to vertical positions to split wood in either positions

| Model                           | ENLS20H                           |
|---------------------------------|-----------------------------------|
| Description                     | Endura 5.5 hp 20 ton Woodsplitter |
| Engine                          | 5.5 hp Honda GX160 OHV            |
| Splitting Power                 | 20 ton (40 000 lbs)               |
| Cycle Time                      | approx. 14 sec.                   |
| Stroke Cylinder                 | 24" in.                           |
| Bore                            | 4" in.                            |
| Working Dimensions (L x W x H)  | 87" x 49" x 42"                   |
| Net Weight                      | 400 lbs                           |
| Shipping Dimensions (L x W x H) | 87" x 48" x 48"                   |
| Shipping Weight                 | 750 lbs                           |



# Stump grinder

## Endura Professional Stump Grinder - For fast and easy stump grinding

### Superior Design

- ♦ At 32" wide, our stump grinder is designed for optimal mobility, whether moving through narrow garden paths or tight walkways
- ♦ Unique angled frame keeps the engine on a level plane through more of the operation to help extend its service life
- ♦ By assembling the front mounted cutter wheel to one of the longest frames in the market, our stump grinders deliver longer reach and grinding capacity

### Operator Safety

- ♦ Double bow handle bar with dead man's grip allows operator free and unrestricted access to control panel for maximum efficiency and operator safety
- ♦ 6-position adjustable handlebar gives user a comfortable working position and complete grinding control

### Low Maintenance

- ♦ Ball bearing idler wheel design reduces belt tension and excess side loads to engine and cutter wheel bearings, thus lowering maintenance costs and extending overall unit durability and performance
- ♦ 13 hp Honda GX390 engine

### ENSG13H



Powered by 13 hp Honda GX engine with Cyclone air filter for clean tough grinding strength.



Rugged cutter wheel mounted on our extra long shaft increases your reach and movement.



Integrated manual box provides user with access to operation guides and other important documentation on jobsite.

Chip confinement skirts protect operator from wood chips flying out from large undercarriage during work.



| Model            | ENSG13H                                  |
|------------------|--|
| Description      | Endura 13.0 hp Gas-powered Stump Grinder |
| Engine           | 13.0 hp Honda GX390 OHV                  |
| Operating RPM    | 3 600 rpm                                |
| Starting Method  | Recoil-start                             |
| Disc RPM         | 2 275 rpm                                |
| Cutter Wheel     | 14" in. x 3/8" in.                       |
| Teeth Size       | 1/2"                                     |
| Cutting Capacity | 20" above grade<br>16" below grade       |
| Net Weight       | 320 lbs                                  |
| Shipping Weight  | 500 lbs                                  |

### Replacement Teeth for Endura Stump Grinders



| Product No. | Description                   |
|-------------|-------------------------------|
| DO16173     | Straight Teeth                |
| DO16174     | Right Hand Teeth              |
| DO16175     | Left Hand Teeth               |
| DO16235     | Complete Teeth Set (set of 8) |

#### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

G5

WWW.uniquip.ca

#### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221


# h ydrostatic earth tiller

## Maxim Hydrostatic Rear Tine Earth Tiller - Tough, Solid Performance

- Versatile** ♦ Choose your own speed with hydrostatic drive
- Rugged** ♦ Heavy-duty all-steel construction tackles the toughest jobsite conditions
- Control** ♦ Hand-controlled throttle, tines, direction and speed for easy handling and control



Deadman's grip design for extra safety.

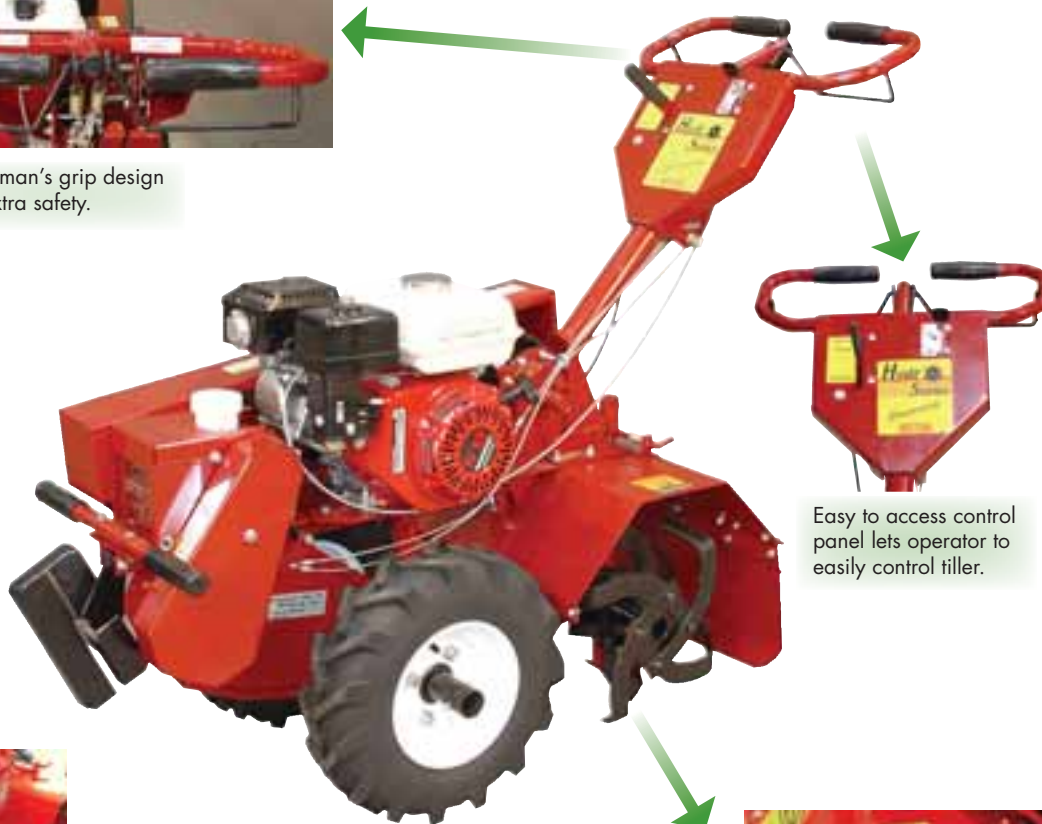

Easy to access control panel lets operator to easily control tiller.

Removeable weights can be used to adjust tiller to soil conditions.



### **MXRMHGU65H**

Aggressive steel tines cuts through to prepare soil for optimum planting results.



| Model                           | MXRMHGU65H                              |
|---------------------------------|---|
| Description                     | Maxim 6.5 hp Hydraulic Rear-Tine Tiller |
| Engine                          | 6.5 hp Honda GX160 OHV                  |
| Tilling Width                   | 22"                                     |
| Tilling Depth                   | up to 8" in.                            |
| Tines                           | Counter-rotating Bolo Tines             |
| Wheels                          | 13 x 5 x 6 Tractor-style                |
| Working Dimensions (L x W x H)  | 43" x 21.5" x 30"                       |
| Net Weight                      | 230 lbs                                 |
| Shipping Dimensions (L x W x H) | 48" x 48" x 48"                         |
| Shipping Weight                 | 1280 lbs                                |



#### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

G6

www.uniquip.ca

#### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## Maxim Heavy-duty Chain-drive Tillers - For strength & consistency

- Durable** ♦ Steel-body construction with added reinforcement at stress points for rugged applications
- Safe Design** ♦ Chain-drive transmission enclosed in specially designed double-welded case for protection against jobsite abuse
- Low Maintenance** ♦ Easy to replace slasher tines with bolt-on blades allows for minimal down time

### MXRMT55H



### MXGM50B



| Model           | MXGM50B                                    | MXRMT55H   |
|-----------------|--|--|
| Description     | Maxim 5.0 hp Chain-drive Front-Tine Tiller | Maxim 5.5 hp Chain-drive Front-Tine Tiller                         |
| Engine          | Briggs & Stratton 5.0 hp Standard          | 5.5 hp Honda GX160 OHV   |
| Tilling Width   | 14" in. - 26" in.                          | 14" in. - 26" in.  |
| Tilling Depth   | up to 8" in.                               | up to 8" in.   |
| Tines           | Slasher-style Bolt-on Blades               | Slasher-style Bolt-on Blades                                       |
| Wheels          | 10 x 1.75 Heavy-duty Transport Wheels      | 10 x 1.75 Heavy-duty Transport Wheels with Spring-loaded Latch Pin |
| Net Weight      | 140 lbs                                    | 150 lbs  |
| Shipping Weight | 145 lbs                                    | 155 lbs  |

# hydraulic earth auger

## Little Beaver 11 hp Towable Hydraulic Earth Auger - Power ... Versatility ... Dependability ...

- Rental-tough**
  - ♦ Welded steel plate and tube construction for extra long life
  - ♦ Powered by Honda GX engines for reliable starts and durability
  - ♦ Inlet suction strainer and a 10 micron return filter combine to keep hydraulic system clean and low maintenance
- User-friendly**
  - ♦ Convenient forward and reverse auger rotation for controlled drilling
  - ♦ Two-position handle rotates 180 degrees allowing you to drill right next to buildings or any obstructions
  - ♦ Infinitely variable 20 degree auger tilt provides vertical drilling even in uneven terrain
- Mobile**
  - ♦ Highway-rated pneumatic tires moves auger easily over manicured turf, leaving no marks or damage, thus eliminating costly restoration work often caused by skid-steers
  - ♦ Removable "no tools" tow hitch permits easy highway transport
  - ♦ Auger lock makes it easy and safe to transport around jobsite



Removable tow hitch lets you bring your Little Beaver through highways and country roads.



180 pivoting handle gets you close in tight spaces.



### LBHYDTB11H

| Model                              | LBHYDTB11H  |
|------------------------------------|---|
| Description                        | Little Beaver 11 hp Towable Hydraulic Earth Auger |
| Engine                             | 11.0 hp Honda GX340 OHV                           |
| Max. Auger Speed                   | 141 rpm   |
| Max. Auger Torque                  | 262 ft.lbs.                                       |
| Handle                             | Two-position                                      |
| Auger Tilt                         | 20 degrees in each direction                      |
| Auger Locks                        | Std. Vertical and transport locks                 |
| Tires                              | 5.7-8 highway rated                               |
| Working Dimensions<br>(L x W x H)  | 106" x 34" x 43"                                  |
| Working Weight                     | 585 lbs   |
| Shipping Dimensions<br>(L x W x H) | 106" x 34" x 43"                                  |
| Shipping Weight                    | 2480 lbs  |



#### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

G8

www.uniquip.ca

#### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221



## mechanical earth auger

### **Little Beaver 5.5 hp Mechanical Earth Auger - Lightweight, powerful, reliable.**

#### **Rugged**

- ♦ High speed 360 RPM auger rotation for increased productivity and cleaner holes
- ♦ Patented torque tube eliminates kickback found in competitive augers, making one-man drilling safe and productive
- ♦ 8" pneumatic wheels on easy-rolling carriage glides over manicured turf, leaving no marks or damage, thus eliminating costly restoration work often caused by skid-steers

#### **Well-designed**

- ♦ Roll-cage protects engine from jobsite damage
- ♦ Engine throttle control and on/off switch are conveniently located on the left handle for easy operator access
- ♦ Padded handles for optimal ergonomic comfort

#### **Low Maintenance**

- ♦ Heavy-duty transmission feature cooling fins for quick heat dissipation, o-ring seals, and heat-treated shafts and bearings mounted in and oil bath for smooth operation and low maintenance
- ♦ Reliable, centrifugal slip clutch protects the flexible drive cable and the transmission from damage from buried objects or auger overload



Steel roll cage protects engine from jobsite abuse.



Heavy-duty transmission specifically designed for high speed drilling.

Snap button holds auger securely to the transmission and lets you easily connect or remove augers and extensions.



Centrifugal slip clutch for low maintenance and longer service life.



**LBMDL5HR5**



Standard augers are equipped with hard-faced replaceable points and cutting blades.

| Model                | LBMDL5HR5                                   |
|----------------------|---|
| Description          | Little Beaver 5.5 hp Mechanical Earth Auger |
| Engine               | 5.5 hp Honda GX160 OHV                      |
| Gear Reduction Ratio | 10:01                                       |
| RPM                  | 360   |
| Wheels               | 8" Semi-pneumatic                           |
| Working Weight       | 140 lbs                                     |
| Shipping Weight      | 400 lbs                                     |

#### **English Assistance**

(T) 1.888.332.4012 (F) 1.866.567.0956

**G9**

**WWW.uniquip.ca**

#### **French Assistance**

(T) 1.800.332.4012 (F) 1.866.825.2221

# W

## eed trimmer & ccessories for earth augers

| Accessories for Little Beaver Earth Augers |                                 |             |   |
|--|---------------------------------|-------------|---|
| Product No.                                | Description                     | Product No. | Description   |
| LB6X36SSS                                  | 6" x 36" Snap-on Auger          | LB9023-8    | 8" Auger Replacement Blade  |
| LB8X36SSS                                  | 8" x 36" Snap-on Auger          | LB9023-9    | 9" Replacement Blade  |
| LB7X42SSS                                  | 7" x 42" Snap-on Auger          | LB9027      | Replacement Point for 4"-12"  |
| LB9X42SSS                                  | 9" x 42" Snap-on Auger          | LB9051-GENS | 1-3/8" Hex Bar Adaptor for General Augers to be used on Little Beaver machines                |
| LB9054-A                                   | 18" Snap-on Extension Tube      | LB9052-GEN  | 1-3/8" F x 1-3/8" M Hex Drive Adaptor for Little Beaver augers to be used on General Machines |
| LB9023-6                                   | 6" & 7" Auger Replacement Blade | LB20200     | Horizontal Sidewalk Auger Kit   |



## Maxim 6.0hp Trim Master Weed Trimmer - Rough and Ready for a Tumble!

- Versatile** ♦ With the power of a lawn mower and the versatility of a string trimmer, the Trim Master will cut through difficult terrain
- Adaptable** ♦ Get closer to fence rows, trees, landscaping and other hard to reach areas with 24" cutting area and heavy-duty 0.155" inches diam. cord
- ♦ Easy to operate and hassle-free maintenance
- Durable** ♦ All steel construction designed for rugged use



**MXMWT6BIT**



| Model                           | MXMWT6BIT                            |
|---------------------------------|--------------------------------------|
| Description                     | Maxim 6.0hp Trim Master Weed Trimmer |
| Engine                          | 6.0hp Briggs & Stratton IC           |
| Cutting Width                   | 24"                                  |
| Cutting Height                  | 1-7/8" - 3-3/4"                      |
| Cutting Cord                    | 155 mil Heavy-duty                   |
| Shaft                           | 3/4"                                 |
| Wheels                          | 16" w/steel rims                     |
| Working Dimensions (L x W x H)  | 106" x 23" x 36"                     |
| Working Weight                  | 95 lbs                               |
| Shipping Dimensions (L x W x H) | 48" x 24" x 36"                      |
| Shipping Weight                 | 240 lbs                              |

**English Assistance**

(T) 1.888.332.4012 (F) 1.866.567.0956

**G10**

**WWW.uniquip.ca**

**French Assistance**

(T) 1.800.332.4012 (F) 1.866.825.2221

# Sod cutter

## Endura Professional 18" Sod Cutter - Cut to fit.

### Rugged

- 10" tractor style wheels takes sod cutting anywhere
- Powder-coat finish for extra durability and service life
- Heavy gauge welded steel frame with roll cage protection for the engine

### Adjustable

- Blade can be finely adjusted for cutting depths up to 2.5" (63 cm)
- Choose from 2 different cutting gears, 4 transport gears and a power reverse for maximum manoeuvrability

### Safe

- Machine stops cutting when operator releases throttle for safe operation
- Rubber skirt protects operator from blade action



Blade engagement controlled easily and safely by operator.



Adjust blade depth simply by twisting depth adjuster!



Rubber skirt protects operator from cutting blade.

Cutting blade slips right into lawn for even cutting up to 2.5" deep.



## ENSC18HC

| Model                           | ENSC18HC                                 |
|---------------------------------|--|
| Description                     | Endura 5.5hp 18" Sod Cutter              |
| Engine                          | 5.5 hp Honda GX160 OHV                   |
| Cutting Depth                   | 2.5" (6.3 cm)                            |
| Cutting Width                   | 18" (46 cm)                              |
| Working Dimensions (L x W x H)  | 54" x 24" x 36" (137 cm x 61 cm x 91 cm) |
| Net Weight                      | 328 lbs (149 kgs)                        |
| Shipping Dimensions (L x W x H) | 54" x 24" x 36" (137 cm x 61 cm x 91 cm) |
| Shipping Weight                 | 360 lbs (164 kgs)                        |



### English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

Update: 08A06UNICATE

G11

WWW.uniquip.ca

### French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## Agrimetal "Rotorake" Mechanical Rake - The 'Reel' Solution

### Revolutionary

- Unique nylon hammers rake through and clean those hard to get rocks without damaging lawn
- Sweeper brush design solves problem of removing gravel and stones from lawns
- Works on lawns and other terrain that stops the conventional rubber broom

### Multi-functional

- Break up aeration cores in one pass to create that professional manicured lawn
- Use to expedite lawn clean up after winter, mulching or landscaping


### Durable

- Rugged construction for added dura-bility and low maintenance
- Honda-powered for sure starts everytime


### Easy to use

- Adjustable wheel height sets rotor height for optimum results
- Handle removes easily for storage and transport

Innovative rotor design (patent pending) rakes debris and breaks up aeration cores quickly & effectively.

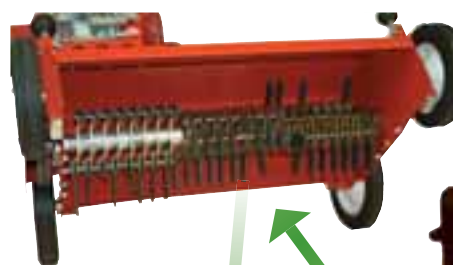

Nylon hammers are gentle on grass, but tough on removing debris like gravel and salt

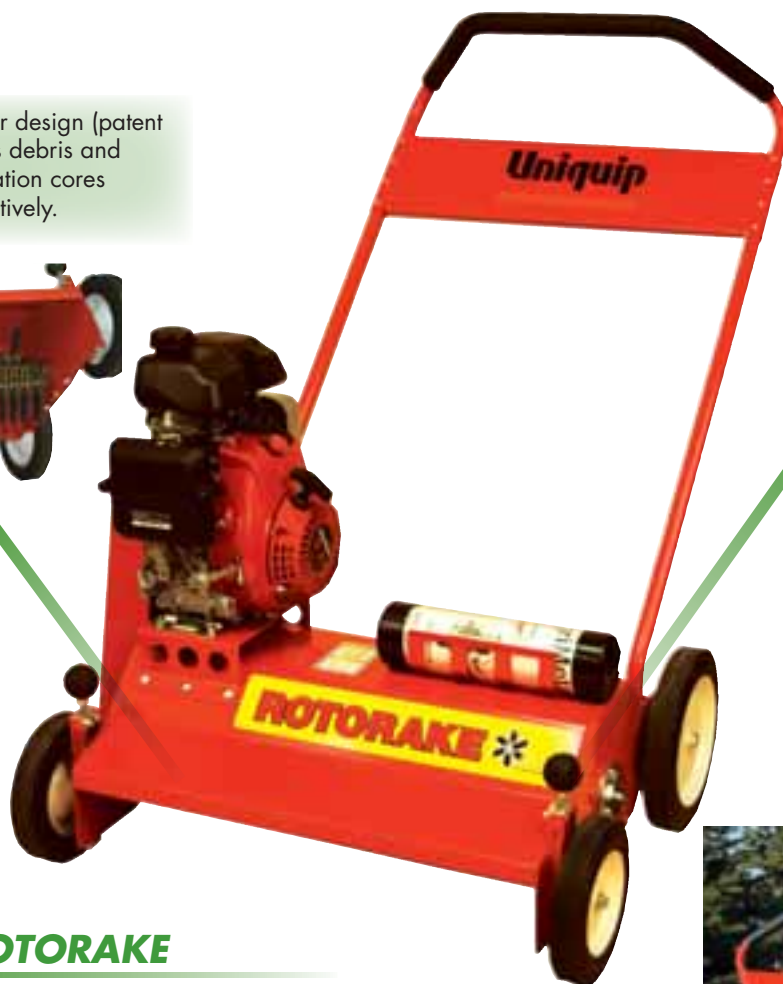

Adjustable wheel height adapts the Rotorake to your needs!

## AGROTORAKE

| Model                           | AGROTORAKE                                |
|---------------------------------|---|
| Description                     | Agrimetal "Rotorake" Mechanical Rake      |
| Engine                          | 3 hp Honda GX100                          |
| Working Width                   | 24" (60 cm)                               |
| Working Dimensions (L x W x H)  | 46" x 31' x 40" (117 cm x 79 cm x 102 cm) |
| Working Weight                  | 100 lbs (45 kg)                           |
| Shipping Dimensions (L x W x H) | 32" x 26" x 32" (81 cm x 66 cm x 81 cm)   |
| Shipping Weight                 | 105 lbs (47 kg)                           |






Maximize your cooking options by adding a rotisserie



Optional smokehood enhances cooking experience

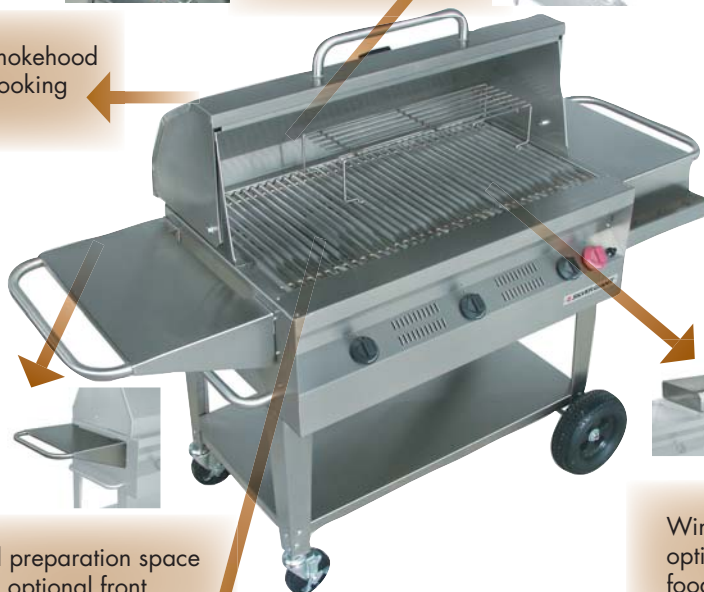

Add preparation space with optional front & side shelves



Windshield option protects food and guests



## Flagro SilverGiant BBQs The choice of professionals.

### Performance

- ♦ Stainless steel flavour plates provide even heat distribution and reduce flare-ups
- ♦ Easy-cleaning and durable stainless steel grids deliver professional results

### Reliability

- ♦ Crossover ignition system ensures reliable firing
- ♦ 10" semi-pneumatic wheels and locking casters for safe and easy set-up anywhere

### Low Maintenance

- ♦ High capacity grease drain with valve for quick cleaning
- ♦ Lifetime warranty on steel burners

**FLSGC36**

**FLSGC48**

**FLSGC60**

**FLSGC72**

| Model                             | FLSGC36                        | FLSGC48                        | FLSGC60                        | FLSGC72                        |
|-----------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| <b>Description</b>                | 36" SilverGiant Commercial BBQ | 48" SilverGiant Commercial BBQ | 60" SilverGiant Commercial BBQ | 72" SilverGiant Commercial BBQ |
| <b>No. of Burners</b>             | 3                              | 4                              | 5                              | 6                              |
| <b>Output</b>                     | 90 000 BTU                     | 120 000 BTU                    | 150 000 BTU                    | 180 000 BTU                    |
| <b>Cooking Dimensions (W x D)</b> | 36" x 21"                      | 48" x 21"                      | 60" x 21"                      | 72" x 21"                      |
| <b>Cooking Area (sq.in)</b>       | 756                            | 1008                           | 1260                           | 1512                           |
| <b>Fuel Consumption (approx.)</b> | 4.5 lbs/hr                     | 6 lbs/hr                       | 7.5 lbs/hr                     | 9lbs/hr                        |
| <b>Working Weight (lbs)</b>       | 150 lbs                        | 185 lbs                        | 235 lbs                        | 280 lbs                        |

### Accessories for SilverGiant BBQs

| For Silver Giant BBQ: | FLSGC36            | FLSGC48                            | FLSGC60                       | FLSGC72            |
|-----------------------|--------------------|------------------------------------|-------------------------------|--------------------|
| <b>Accessory</b>      | <b>Product No.</b> | <b>Product No.</b>                 | <b>Product No.</b>            | <b>Product No.</b> |
| Smokehood             | FLSGCH36           | FLSGCH48                           | 1 x FLSGCH24 & 1 x FLSGCH36   | 2 x FLSGCH36       |
| Rotisserie            | FLSGCROT36         | FLSGCROT48                         | Not Available                 | Not Available      |
| Front Shelf           | FLSGCFR36          | FLSGCFR48                          | FLSGCFR60                     | FLSGCFR72          |
| Sideshelf             |                    | All SilverGiant BBQs use FLSGCSS21 |                               |                    |
| Windshield            | FLSGCWS36          | FLSGCWS48                          | 1 x FLSGCWS24 & 1 x FLSGCWS36 | 2 x FLSGCWS36      |

## 12" High Capacity Air Mover Circulate. Ventilate. Extract.

- Compact**
  - Compact sizing allows for deployment on jobsites of any size
  - 16' ft. flexible reinforced duct folds easily folds together for transportation and set-up
- Versatile**
  - High performance design allows for multiple uses
  - Operates as a stand-alone drying unit or use with flexible duct as a powerful air mover
- Tough**
  - Rugged steel body and aluminium blades protect unit from everyday jobsite action

### AMAF12



### AMBF36

### AMPF30



### AMBF42

## Contractor-use Pedestal & Barrel Fans Refresh. Optimize. Perform.

- Variety**
  - Choose the right fan from pedestal to barrel fan models
  - Variable speed selection lets you set your comfort level
- Power**
  - High capacity design circulates large volumes of air for optimal performance
- Rugged**
  - Steel-constructed body & blades combine to deliver contractor-tough durability & power

| Model                                  | AMAF12  | AMBF36                                     | AMBF42                                     | AMPF30                                |
|--|---|--|--|---------------------------------------|
| <b>Description</b>                     | 12" High Capacity Air Mover                                     | 36" 2-Speed Belt-drive Cooling Barrel Fan  | 42" 2-Speed Belt-drive Cooling Barrel Fan  | 30" 3-Speed Direct-drive Pedestal Fan |
| <b>Motor</b>                           | 115v, 60Hz, Single-Phase  | 1/3hp, 120v, 60Hz, Single-Phase Belt-Drive | 1/2hp, 120v, 60Hz, Single-Phase Belt-Drive | 120v, 60Hz, Single-Phase Belt-Drive   |
| <b>RPM</b>                             | 2800r/min   | 440 - 525                                  | 400 - 450                                  | 950 - 1050 - 1250                     |
| <b>CFM</b>                             | 60m³/min  | 7 300 - 10 200                             | 9 500 - 13 300                             | 6480 - 7920 - 9500                    |
| <b>No. of Blades</b>                   | 7 Aluminium Blades  | 4 Aluminium Blades                         | 4 Aluminium Blades                         | 3 Aluminium Blades                    |
| <b>Cord Length</b>                     | 6.5' ft.  | 7' ft.                                     | 7' ft.                                     | 7' ft.                                |
| <b>Diameter</b>                        | 12" in.   | 36" in                                     | 42" in.                                    | 30" in.                               |
| <b>Working Dimensions (L x W x H)</b>  | Air Mover: 14.1" x 12.6" x 15.78"<br>Duct: 13.4" x 16' ft. long | 41" x 17" x 40"                            | 41" x 17" x 46"                            | 43.5" x 6.48" x 32.07"                |
| <b>Working Weight (lbs)</b>            | 40.7  | 76   | 93   | 67                                    |
| <b>Shipping Dimensions (L x W x H)</b> | Box 1: 16.14" x 14.76" x 17.13"<br>Box 2: 15" x 8.27" x 15.16"  | 42" x 18" x 41"                            | 48" x 18" x 47"                            | 44.5" x 7.48" x 33.07"                |
| <b>Shipping Weight</b>                 | 44 lbs  | 91 lbs                                     | 113 lbs                                    | 75 lbs                                |

## Flagro Heat Cannon Contractor Propane Construction Heaters - Steady Portable Heat



### FLF150

### FLF375

#### Simple

- ♦ Simple design for low maintenance performance
- ♦ Compact stackable design allows for easy transport and storage

#### Safe

- ♦ Automatic shut-off valve design provides added safety in the event of a flame failure

#### Contractor-tough

- ♦ Rugged steel cage offers added stability and durability

| Model                            | FLF150                                      | FLF375                                      |
|----------------------------------|---|---|
| Description                      | 150 000 BTU Construction-use Propane Heater | 375 000 BTU Construction-use Propane Heater |
| Fuel Type                        | Propane                                     | Propane                                     |
| Fuel Consumption (lbs/hr)        | 2.3 to 6.9                                  | 10.1 to 17.3                                |
| Input (Max.BTU/hr)               | 150 000                                     | 375 000                                     |
| Input (Min.BTU/hr)               | 50 000                                      | 220 000                                     |
| Propane Manifold Pressure (psig) | 2.25 to 20                                  | 7 to 20                                     |
| Air Outlet Diameter              | 8"  | 13"   |
| Ignition                         | Manual                                      | Manual                                      |
| Weight (lbs)                     | 32  | 65  |
| Dimensions (W x H x L)           | 11.25" x 14" x 30"                          | 17" x 22" x 42"                             |
| Shipping Weight                  | 35 lbs                                      | 91 lbs                                      |

### FLAM140



## Flagro Heat Cannon Air Movers - For heavy-duty circulation

#### Strong

- ♦ Sturdy powder-coated steel body constructed for tough jobs
- ♦ Powerful motors turn large fan blades for increased air circulation

#### Increased Efficiency

- ♦ Pair an air mover with any construction heater to optimize your heating investment and improve circulation

#### Versatile

- ♦ Available in 2 different free-standing models: the compact 5000 CFM FLAM50 and the industrial 14 000 CFM FLAM140
- ♦ Install the 800 CFM FLB375 directly onto the 150 000 BTU FLF375 Contractor Propane Construction Heater for a complete heating solution

| Model                  | FLAM50                          | FLAM140                          | FLB375  |
|------------------------|---------------------------------|----------------------------------|---|
| Description            | Heat Cannon 5 000 CFM Air Mover | Heat Cannon 14 000 CFM Air Mover | Heat Cannon 800 CFM Air Mover Attachment for FLF375 |
| Air Circulation (CFM)  | 5 000                           | 14 000                           | 800   |
| Power Supply           | Single Phase 120v, 60Hz, 20A    | Single Phase 120v, 60Hz, 20A     | Single Phase 120v, 60Hz, 20A                        |
| Fan Motor              | 1/2hp - 1725 rpm                | 1/2hp - 1725 rpm                 | 1/2hp - 1725 rpm                                    |
| Fan Blade              | 20" Diameter                    | 42" Diameter                     | 12" Diameter  |
| Dimensions (W x H x L) | 16" x 22.5" x 21"               | 24" x 48" x 42"                  | 8.25" x 8.25" x 13"                                 |
| Weight (lbs)           | 67                              | 200                              | 14  |



### FLAM50

### FLB375

not shown

## Flagro Heat Cannon Contractor Propane/Natural Gas Construction Heaters - Rugged warmth for tough conditions

**Versatile**

- Easily switch between propane and natural gas for ultimate flexibility in fuel source
- Automatic temperature control allows operator to safely set desired temperature

**Secure**

- Electronic direct spark ignition with 100% flame safeguard to protect operator and jobsite safety
- Minimal combustion impurities released by environmentally friendly design for cleaner jobsite environment and operator safety

**Easy Set-up**

- Rugged steel frame for easy transportation and storage
- Thermostat included for safe and easy temperature adjustment
- Easy set-up and low maintenance design for reliable heat

**Industrial-strength**

- Circulates 2 000 – 7 000 CFM of heated air for optimum distribution
- Use with optional air movers (FLAM50 and FLAM140) for added heating range

| Model                                | FLF400T   | FLF1000T  | FLF1500T  |
|--------------------------------------|---|---|---|
| <b>Description</b>                   | 400 000 BTU Construction-use Propane/Natural Gas Heater | 1 000 000 BTU Construction-use Propane/Natural Gas Heater | 1 500 000 BTU Construction-use Propane/Natural Gas Heater |
| <b>Fuel Type</b>                     | Propane or Natural Gas                                  | Propane or Natural Gas                                    | Propane or Natural Gas                                    |
| <b>Fuel Consumption (lbs/hr)</b>     | 18.5  | 46  | 69  |
| <b>Fuel Consumption (CFH)</b>        | 380   | 952   | 1428  |
| <b>Input (Max.BTU/hr)</b>            | 400 000   | 1 000 000   | 1 500 000   |
| <b>Propane Manifold Pressure</b>     | 1.25" W.C   | 1.55" W.C   | 1.6" W.C  |
| <b>Natural Gas Manifold Pressure</b> | 3.25" W.C   | 3.6" W.C  | 3.9" W.C  |
| <b>Air Outlet Diameter</b>           | 15"   | 26"   | 26"   |
| <b>Ignition</b>                      | Direct Spark Ignition Control with Thermostat Control   | Direct Spark Ignition Control with Thermostat Control     | Direct Spark Ignition Control with Thermostat Control     |
| <b>Weight (lbs)</b>                  | 90  | 356   | 360   |
| <b>Dimensions (W x H x L)</b>        | 22" x 24" x 48"   | 29" x 38" x 61"   | 29" x 38" x 61"   |



**FLF400T**

**FLF1000T**

**FLF1500T**

## Flagro Heat Cannon Propane Tent Heaters - Share the warmth

### Multi-functional

- ♦ Use as either a fresh air circulator or heater at the touch of a switch
- ♦ Super quiet and super efficient design makes this the ideal tent and party heater

### Tough

- ♦ Heavy-duty 16 gauge powder-coated steel body construction designed to withstand contractor-tough conditions
- ♦ 10" pneumatic wheels improves mobility and stability of unit

### Adaptable

- ♦ Conveniently positioned lifting handles facilitate safe loading and ease of heater positioning

### User-friendly

- ♦ 20' cord with thermostat allows for remote placement and temperature accuracy
- ♦ Use with optional 10' ft. air duct (FLTHCP-WD12) to heat hard-to-reach areas



### FLTHC175P

### FLTHC85P

| Model                          | FLTHC85P                               | FLTHC175P                               |
|--------------------------------|--|---|
| Description                    | Flagro 85 000 BTU Propane Tent Heaters | Flagro 175 000 BTU Propane Tent Heaters |
| Fuel Type                      | Propane                                | Propane                                 |
| Fuel Consumption (lbs/hr)      | 3.8                                    | 8                                       |
| Output BTU/hr                  | 85 000                                 | 175 000                                 |
| Hot Air Flow (CFM)             | 450                                    | 1 200                                   |
| Ignition                       | Direct Spark                           | Direct Spark                            |
| Thermostat                     | 20' Cord for Remote Location           | 20' Cord for Remote Location            |
| Working Weight                 | 122 lbs                                | 164 lbs                                 |
| Working Dimensions (W x H x L) | 16" x 30" x 22"                        | 18.25" x 30.625" x 31.125"              |

### Air Duct for Flagro HeatCannon Tent Heaters



| Product No. | Description           | Size      |
|-------------|-----------------------|-----------|
| FLTHCP-WD12 | Duct for Tent Heaters | 12" X 10' |

# p propane tank top & convection heaters



**MACHD12**

## ReddyHeater Tank Top Heaters - Stay warm anywhere

- Easy to use** ♦ Fits on standard propane tanks for instant heat anywhere
- Safe** ♦ Caged heating elements for added protection  
♦ Wind-resistant design
- Versatile** ♦ 3 adjustable heat settings  
♦ Available in single or double burners



**MACHD24**

| Model                                 | MACHD12  | MACHD24  |
|---------------------------------------|--|--|
| <b>Description</b>                    | ReddyHeater 12 000 BTU Single-burner Tank Top Heater | ReddyHeater 24 000 BTU Double-burner Tank Top Heater |
| <b>Fuel Type</b>                      | Propane  | Propane  |
| <b>Fuel Consumption (lbs/hr)</b>      | 0.4 to 0.6   | 0.4 to 1.11  |
| <b>Output (BTU/hr)</b>                | 8 000 to 12 000                                      | 8 000 to 24 000                                      |
| <b>Ignition</b>                       | Manual   | Manual   |
| <b>Working Weight</b>                 | 3 lbs  | 6 lbs  |
| <b>Working Dimensions (W x H x L)</b> | 7.75" x 13" x 8.75"                                  | 15.25" x 16.2" x 14.25"                              |
| <b>Shipping Weight</b>                | 5 lbs  | 8 lbs  |

## Universal Convection Heaters - For balanced warmth

- Even Heating** ♦ 360° radiant design generates 'envelope of warmth'
- Simple** ♦ Push-button direct-spark ignition for reliable starts
- Protection** ♦ Flame-out sensor and automatic fuel shut-off functions protects operator and jobsite safety
- Ready-to-go** ♦ Regulator and 10' rubber hose included for instant set-up

| Model   | MA80CC                                 | MA200CC                                 |
|---|--|---|
| <b>Description</b>  | Universal 80 000 BTU Convection Heater | Universal 200 000 BTU Convection Heater |
| <b>Fuel Type</b>  | Propane                                | Propane                                 |
| <b>Fuel Consumption (lbs/hr)</b>                              | 1.9 to 3.7                             | 4.6 to 9.3                              |
| <b>Output (BTU/hr)</b>  | 40 000 to 80 000                       | 75 000 to 200 000                       |
| <b>Heating Area (in cubic feet, based on 4.4°C heat rise)</b> | 7 500 to 15 000                        | 18 800 to 37 600                        |
| <b>Ignition</b>   | Direct Spark Piezo Electric            | Direct Spark Piezo Electric             |
| <b>Working Weight</b>   | 13 lbs                                 | 16 lbs                                  |
| <b>Working Dimensions (W x H x L)</b>                         | 18" x 20.5" 18.5"                      | 18" x 31" x 18.5"                       |
| <b>Shipping Weight</b>  | 20.50 lbs                              | 21.25 lbs                               |



**MA80CC**

Collapsible body design sets-up & stores away easily.



**MA200C**

## Universal Kerosene/Diesel Forced Air Heaters - Safe portable heat.

- Portable**
  - Lightweight portable design for easy transportation
  - Standard wheelkits (optional on MAUKC55CT) for increased portability from site to site
- Safety-driven Design**
  - Electronic direct spark ignition with 100% flame safeguard to protect operator and jobsite safety
  - HSI (Hot Surface Ignition) eliminates need for traditional spark plug for added safety and ease of use
  - Thermostat included to control and maintain desired heating levels
  - Automatic fuel shut-off protects operator and jobsite safety
- Adaptable**
  - Available in various sizes to suit jobsite needs
  - Suitable for homeowner to contractor applications



### MAUKC115DT

\*Standard wheel kit with dual handles included

### MAUKC165DT

\*10" pneumatic wheel kit with dual handles included



### MAUKC55CT

### MAUKC70ET

| Model   | MAUKC55CT  | MAUKC70ET  | MAUKC115DT  | MAUKC165T   |
|---|--|--|---|---|
| <b>Heater Type</b>  | Universal 55 000 BTU<br>Kerosene/Diesel<br>Forced Air Heater | Universal 70 000 BTU<br>Kerosene/Diesel<br>Forced Air Heater | Universal 115 000 BTU<br>Kerosene/Diesel<br>Forced Air Heater | Universal 165 000 BTU<br>Kerosene/Diesel<br>Forced Air Heater |
| <b>Fuel Type</b>  | Kerosene or Diesel   | Kerosene or Diesel   | Kerosene or Diesel  | Kerosene or Diesel  |
| <b>Fuel Consumption (lbs/hr)</b>  | 0.44   | 0.52   | 0.8   | 1.2   |
| <b>Output (BTU/hr)</b>  | 55 000   | 70 000   | 115 000   | 165 000   |
| <b>Heating Area<br/>(based on 4.4°C<br/>heat rise &amp; 8' ft. ceiling)</b> | 10 300   | 13 100   | 21 600  | 31 000  |
| <b>Hot Air Flow (CFM)</b>   | 180  | 360  | 490   | 575   |
| <b>Thermostat</b>   | Standard   | Standard   | Standard  | Standard  |
| <b>Ignition</b>   | Electronic with HIS  | Electronic with HIS  | Electronic with HIS   | Electronic<br>with HIS  |
| <b>Working Weight</b>   | 30 lbs   | 30 lbs   | 45 lbs  | 53 lbs  |
| <b>Working Dimensions (L x<br/>W x H)</b>                                   | 11.8" x 15.4"<br>x 30"                                       | 11.8" x 15.4"<br>x 30"                                       | 18" x 22" x 34"   | 24.5" x 25"<br>x 42"  |
| <b>Shipping Weight</b>  | 35 lbs   | 35 lbs   | 56 lbs  | 70 lbs  |

## Universal Multi-fuel Indirect-fired Forced Air Heaters - Heat for any occasion.

- Versatile**
  - ♦ Runs on 7 different fuels for maximum adaptability
  - ♦ Wheel kit included for mobility
- Clean Burning**
  - ♦ Powerful fan ensures high-static pressure, allowing heater to be outdoors while heating the indoors with clean heated air
  - ♦ Heat exchanger keeps heated air and exhaust gas separated
- User-friendly**
  - ♦ Available in various sizes to suit jobsite needs
  - ♦ Fully-assembled for instant operation

| Model   | MA160IF   | MA280IF   |
|---|---|---|
| <b>Description</b>  | Universal 160 000 BTU Indirect-fired Forced Air Heaters | Universal 280 000 BTU Indirect-fired Forced Air Heaters |
| <b>Fuel Type</b>  | Kerosene/Diesel   | Kerosene/Diesel   |
| <b>Fuel Consumption (lbs/hr)</b>                              | 1.4 to 2.3  | 3.0 to 4.6  |
| <b>Output (CFM)</b>   | 1 060   | 1 940   |
| <b>Output (BTU/hr)</b>  | 160 000   | 280 000   |
| <b>Heating Area (in cubic feet, based on 4.4°C heat rise)</b> | 27 000  | 47 400  |
| <b>Thermostat</b>   | Optional MAHA3210 External Thermostat                   | Optional MAHA3210 External Thermostat                   |
| <b>Ignition</b>   | Electronic Spark Dual Electrode                         | Electronic Spark Dual Electrode                         |
| <b>Working Weight</b>   | 161 lbs   | 273 lbs   |
| <b>Working Dimensions (W x H x L)</b>                         | 50" x 19" x 39"   | 62" x 27" x 45"   |
| <b>Shipping Dimensions (L x W x H)</b>                        | 54" x 20" x 40"   | 65" x 28" x 42"   |
| <b>Shipping Weight</b>  | 190 lbs   | 320 lbs   |

### MA160IF



### MA280IF



## Flagro Heavy-duty Indirect-fired Heaters - Dependable heat wherever you need it.

- Safe**
- ♦ Indirect fired – heat exchanger allows for external exhaust of combustion products
  - ♦ Thermostatically controlled

- Mobile**
- ♦ Heavy duty 16" pneumatic tires and slim design provides for easy site mobility and transportation
  - ♦ FVO-400 model has built-in fuel tank for easy set-up

- User-friendly**
- ♦ Your choice of heating oil, diesel, kerosene propane or natural gas
  - ♦ Teo 12" inch diameter ar outlets for free air flow and exchange
  - ♦ Fully-assembled for instant operation (ducts sold separately)



### FLFVO-400

### FLFVN-400

### FLFVP-400



Extend your working range with optional 12" x 15' ft. flexible ducting

| Model                                       | FLFVO-400                                    | FLFVN-400  | FLFVP-400  |
|---|--|--|--|
| <b>Heater Type</b>                          | Flagro Oil 400 000 BTU Indirect-fired Heater | Flagro Natural Gas 400 000 BTU Indirect-fired Heater | Flagro Propane 400 000 BTU Indirect-fired Heater |
| <b>Fuel Tank Capacity</b>                   | 48 US gallons                                | External n/a   | External n/a                                     |
| <b>Operating Time/<br/>Fuel Consumption</b> | 16 hours                                     | 380 cfh  | 18.5lbs/hr                                       |
| <b>Heat Capacity</b>                        | 400 000 BTUs                                 | 400 000 BTUs   | 400 000 BTUs                                     |
| <b>Heat Exchanger</b>                       | 16 gauge<br>304 Stainless Steel              | 16 gauge<br>304 Stainless Steel                      | 16 gauge<br>304 Stainless Steel                  |
| <b>Fan Motor</b>                            | 1 HP @ 1725 rpm<br>2500 cfm                  | 1 HP @ 1725 rpm<br>2500 cfm                          | 1 HP @ 1725 rpm<br>2500 cfm                      |
| <b>Ignition</b>                             | Direct Spark                                 | Direct Spark   | Direct Spark                                     |
| <b>Nozzle Size/<br/>Gas Pressure</b>        | 2.25 U.S. GPH<br>@ 170 PSI                   | 2.0" W.C.  | 3.2" W.C.  |
| <b>Working Weight</b>                       | 30 lbs                                       | 30 lbs   | 45 lbs   |
| <b>Working Dimensions (L x W x H)</b>       | 70" x 24" x 52"                              | 70" x 24" x 52"                                      | 70" x 24" x 52"                                  |
| <b>Shipping Weight</b>                      | 35 lbs                                       | 35 lbs   | 53 lbs   |

# Radiant & patio heaters

## Universal Radiant Heaters - Glow with warmth.

- Easy to use** ♦ No electrical connection required
- Safe** ♦ Caged heating elements for added protection  
♦ 35 000 BTU model comes with automatic tip-over safety switch
- Versatile** ♦ 125 000 BTU model available in either propane or natural gas to suit jobsite requirements

### MA35R



| Model                           | MA35R                                       | MA125R                                       | MA125RN  |
|---------------------------------|---|--|--|
| Description                     | Universal 35 000 BTU Propane Radiant Heater | Universal 125 000 BTU Propane Radiant Heater | Universal 125 000 BTU Natural Gas Radiant Heater |
| Fuel Type                       | Propane                                     | Propane                                      | Natural Gas                                      |
| Fuel Consumption (lbs/hr)       | 1.62  | 5.79   | 125 cu.ft  |
| Output (BTU/hr)                 | 35 000                                      | 125 000                                      | 125 000  |
| Ignition                        | Piezo Electric Ignitor                      | Piezo Electric Pilot Ignitor                 | Piezo Electric Pilot Ignitor                     |
| Working Weight                  | 22.5 lbs                                    | 44.5 lbs                                     | 44.5 lbs   |
| Working Dimensions (W x H x L)  | 10" x 35" x 13"                             | 16" x 35" x 16"                              | 16" x 35" x 16"                                  |
| Shipping Dimensions (L x W x H) | 12.5" x 9.4" x 34.15"                       | 16.2" x 16.2" x 34.65"                       | 16.2" x 16.2" x 34.65"                           |
| Shipping Weight                 | 35 lbs                                      | 47 lbs                                       | 47 lbs   |



### MA125R

### MA125RN



## Universal Patio Heater - Keep warm in style.

- Rugged Construction** ♦ Stainless steel body and 34" aluminium reflector for rugged durability
- 360° Heating** ♦ Radiant design heats up to 20' circle providing natural warmth on patios, decks and other areas
- Protection** ♦ Piezo Electric ignition with automatic safety tip-over device
- Portable** ♦ Wheel-kit assembly for easy mobility

### MASPC54PHS

| Model                          | MASPC54PHS  |
|--------------------------------|---|
| Description                    | Universal 40 000 BTU Stainless Steel Patio Heater |
| Fuel Type                      | Propane   |
| Fuel Consumption (lbs/hr)      | 1.85  |
| Output (BTU/hr)                | 40 000  |
| Thermostat                     | Standard  |
| Ignition                       | Piezo Electric Pilot Ignitor                      |
| Working Weight                 | 72.4  |
| Working Dimensions (W x H x L) | 21" x 21" x 29"                                   |
| Shipping Weight                | 75 lbs  |

English Assistance

(T) 1.888.332.4012 (F) 1.866.567.0956

H10

WWW.uniquip.ca

French Assistance

(T) 1.800.332.4012 (F) 1.866.825.2221

## Flagro Radiant Heaters - All the heat that you need.

### Heavy-duty Performance

- ♦ Get 100 000 BTU/h of heat in either natural gas or propane versions
- ♦ Strong all steel construction wraparound frame and grilles form a rugged cage around heating elements to protect your jobsite and equipment

### User-friendly

- ♦ Thermostatically controlled
- ♦ Manual/Standing Pilot ignition
- ♦ Recessed controls to withstand damage and abuse from common construction use
- ♦ Choose from 3 different versions to suit your preferences:
  - ♦ FLFHRH-100N (hose assembly sold separately) for use with natural gas
  - ♦ FLFHRH-100P Standard Propane model (hose assembly included), or
  - ♦ FLFHRH-100PQD Quick Disconnect Propane model (Quick Disconnect hose and regulator assembly sold separately)

### Low Maintenance

- ♦ Filterless design
- ♦ Stacks easily for storage and transportation
- ♦ Improved maintenance accessibility



### Hose Assemblies for Flagro Radiant Heaters

#### Product No.

#### Description

FLFRHP-101



Hose Assembly for FLFRHR-100N  
Natural Gas Radiant Heater:  
Includes:  
0.75" x 50' hose, c/w shutoff valve,  
0.5" QD socket & 3/4" QD plug

FLRH-101600LP



Hose Assembly for FLFRHR-100PQD  
Propane Radiant Heater:  
Includes:  
0.5" x 50' hose, c/w shutoff valve,  
0.475" QD & regulator

**FLFHR-100N**

**FLFHR-100P**

**FLFHR-100PQD**

| Model                              | FLFRHR-100N                                      | FLFRHR-100P   | FLFRHR-100PQD  |
|------------------------------------|--|---|--|
| Description                        | Flagro 100 000 BTU<br>Natural Gas Radiant Heater | Flagro 100 000 BTU<br>Propane Radiant Heater<br>with Hose Kit | Flagro 100 000 BTU<br>Propane Radiant Heater<br>(for use with FLFRHR-100PQD<br>Quick Disconnect Hose Assembly) |
| Fuel Type                          | Natural Gas                                      | Propane   | Propane  |
| Fuel Consumption                   | 100 cfh  | 5 lbs/hr  | 5 lbs/hr   |
| Output (BTU/hr)                    | 100 000  | 100 000   | 100 000  |
| Manifold Pressure                  | 7.0" W.C   | 10.0" W.C   | 10.0" W.C  |
| Inlet                              | 3/8" FNPT c/w QD plug                            | 3/8" FNPT c/w QD plug   | 3/8" FNPT c/w QD plug  |
| Weight                             | 47 lbs   | 47 lbs  | 47 lbs   |
| Shipping Dimensions<br>(L x W x H) | 16" x 16" x 35"                                  | 16" x 16" x 35"   | 16" x 16" x 35"  |

## Propane Torch Kits



| Product No. | Description   |
|-------------|---|
| FLFT15-250  | 300 000 BTU Propane Torch with 15' Hose and Regulator |
| FLFT15-500  | 410 000 BTU Propane Torch with 15' Hose and Regulator |

## Regulators and Thermostats

| Product No. | Description   |
|-------------|---|
| FLB42R075   | 0.75" Second Stage Regulator for FLF400T or Flagro Indirect-fired Heater Series |
| FLB42R125   | 1.25" Second Stage Regulator for FLF1000T                                       |
| FLB31R125   | 1.25" Second Stage High Capacity Regulator for FLF1500T                         |

## Hose Assemblies for Flagro HeatCannon Heaters

| Product No. | Description  | Size        |
|-------------|--|-------------|
| FLS5218012  | Hose Assembly for FLF400T Construction Heater              | 0.75" X 15' |
| FLS5418020  | Hose Assembly for FLF1000T & FLF1500T Construction Heaters | 1.25" x 15' |

## Accessories for Flagro Indirect-fired Heaters

| Product No. | Description |
|-------------|-------------|
|-------------|-------------|

FLFV-D15



12" x 15' ft. Flexible Ducting

FLFV-TH



Remote Thermostat for Flagro Indirect-fired Heaters

**flagro**  
INDUSTRIES LIMITED

**HEAT CANNON**

**ReddyHeater**

## Accessories for Universal Indirect-fired Heaters

| Product No. | Description |
|-------------|-------------|
|-------------|-------------|

MAHA3220




16" x 20' Flexible Vent Hose for MA160IF

MAHA3221

24" x 20' Flexible Vent Hose for MA280IF

MAHA3230



Hose Connector Kit for MA160IF

MAHA3231

Hose Connector Kit for MA280IF

MAHA3210



Corded Thermostat for MA160IF & MA280IF

MAHA3211




Extreme Cold Fuel Oil Pre-heater



## Construction Tarps - Protect your investment

- Practical:**
- ♦ Natural white colour is 80% translucent to illuminate work areas
  - ♦ Coated woven polyethylene for added waterproof protection
  - ♦ Individually packaged in sealed poly bags for easy distribution
- Tough:**
- ♦ Durable 8 x 8 weave; 2.8 oz. woven polyethylene
  - ♦ 1000 Denier tapes with 1 mil coating on both sides
  - ♦ 48" polyethylene ties attached to metal eyelets spaced every 36" apart



| Model                      | FE1520                         | FE2030                         | FE3050                         |
|----------------------------|--------------------------------|--------------------------------|--------------------------------|
| Description                | 15' x 20'<br>Construction Tarp | 20' x 30'<br>Construction Tarp | 30' x 50'<br>Construction Tarp |
| Dimensions (L x W)         | 15' x 20'                      | 20' x 30'                      | 30' x 50'                      |
| Sold In                    | 10 tarps/bundle                | 5 tarps/bundle                 | 2 tarps/bundle                 |
| Shipping Weight/<br>bundle | 50 lbs                         | 50 lbs                         | 60 lbs                         |

### FE1520

### FE2030

### FE3050



### BJCC1

## High Pressure Red Snapper - Red hot portable cooking!

- Versatile:**
- ♦ Use with portable propane tank for an instant stove anywhere
  - ♦ Use with GHW8272 Pot and Strainer Kit for group cooking
- User Friendly:**
- ♦ 24" working height
  - ♦ Easy to stow and simple to set-up!

| Model          | BJCC1                     |
|----------------|---------------------------|
| Description    | High Pressure Red Snapper |
| BTUs           | 125000                    |
| Working Height | 24" in.                   |

## 60L High Capacity Pot and Strainer - Boil, fry ... It's Party Time!

- Tough:**
- ♦ Full stainless steel construction
  - ♦ 60 L large capacity ideal for frying turkeys, clam frying party, boiling corn, purify water and any party or camping fun!
- Ready to Work:**
- ♦ Kit includes strainer, pot and lid
  - ♦ Easy to stow and simple to set-up!



### GHW8272



| Model       | GHW8272  |
|-------------|--|
| Description | 60L Stainless Steel High Capacity Pot and Strainer |
| Capacity    | 60L  |

